

Stm32.ioc - Pinout & Configuration

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout

Pinout view

System view

Categories

A-Z

System Core


Analog


Timers

Connectivity

Computing

Middleware

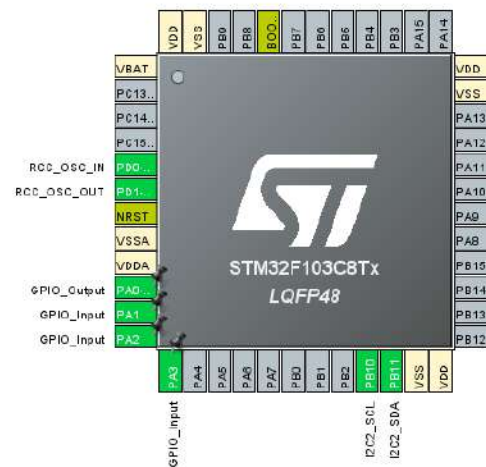

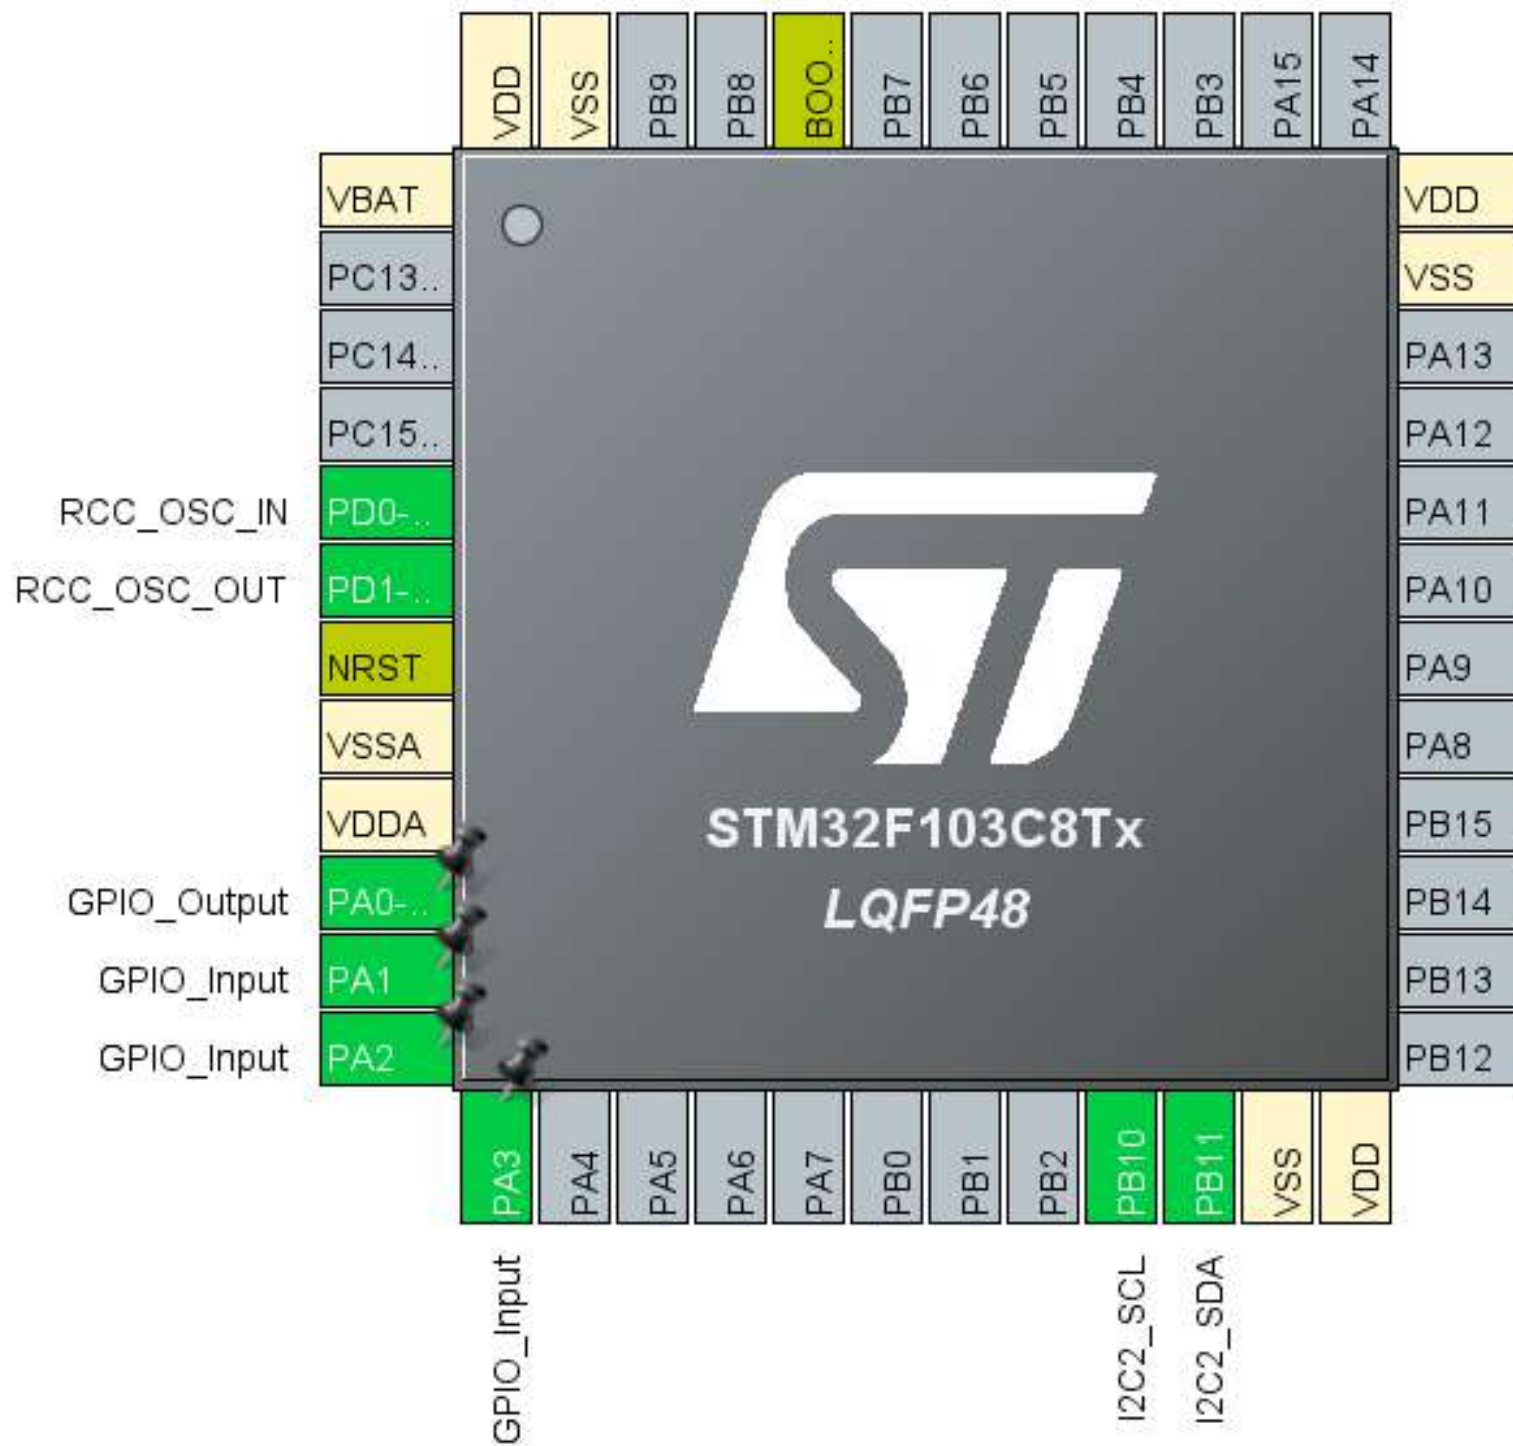

System Core

Analog

Timers

Connectivity

CAN

I2C1

I2C2

SPI1

SPI2

USART1

USART2

USART3

USB

Computing

Middleware

I2C2 Mode and Configuration

Mode

I2C

Configuration

Reset Configuration

NVIC Settings

DMA Settings

GPIO Settings

Parameter Settings

User Constants

Configure the below parameters :

Search (Ctrl+F)

Master Features

I2C Speed Mode

Standard Mode

I2C Clock Speed (Hz)

100000

Slave Features

Clock No Stretch Mode

Disabled

Primary Address Length selection

7-bit

Dual Address Acknowledged

Disabled

Primary slave address

0

General Call address detection

Disabled

System Core

Analog

Timers

RTC

TIM1



TIM4

Connectivity

Computing

Middleware

Slave Mode	Disable
------------	---------

Trigger Source	Disable
----------------	---------

- ✓ Internal Clock

Channel1	Disable
----------	---------

Channel2	Disable
----------	---------

Channel3 Disable

Channel4	Disable
----------	---------

Combined Channels ☐ Disable

Configuration

Reset Configuration

Parameter Settings

User Constants

NVIC Settings

DMA Settings

Configure the below parameters :

 Search (Ctrl+F)



Counter Settings

Prescaler (PSC - 16 bits value)

7199

Counter Mode

Up

Counter Period (AutoReload Register - 16 bi. 4999

4999

Internal Clock Division (CKD)

No Division

auto-reload preload

Disable

Trigger Output (TRGO) Parameters

Master/Slave Mode (MSM bit)

Disable (Trigger input effect not delayed)

Trigger Event Selection

Reset (UG bit from TIMx_EGR)



Parameter Settings



User Constants



NVIC Settings



DMA Settings

Configure the below parameters :



Search (Ctrl+F)



Counter Settings

Prescaler (PSC - 16 bits value)

7199

Counter Mode

Up

Counter Period (AutoReload Register - 16 bi

4999

Internal Clock Division (CKD)

No Division

auto-reload preload

Disable

Trigger Output (TRGO) Parameters

Master/Slave Mode (MSM bit)

Disable (Trigger input effect not delayed)

Trigger Event Selection

Reset (UG bit from TIMx_EGR)

Configuration

Reset Configuration



Parameter Settings



User Constants



NVIC Settings



DMA Settings

NVIC Interrupt Table	Enabled	Preemption Priority	Sub Priority
TIM3 global interrupt	☒	0	0



Resolve Clock Issues

