
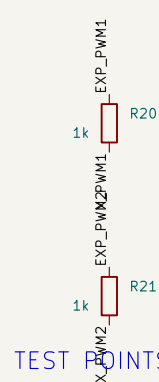
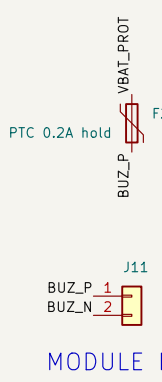
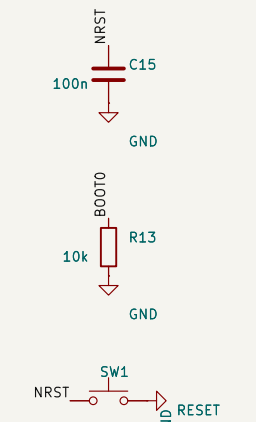
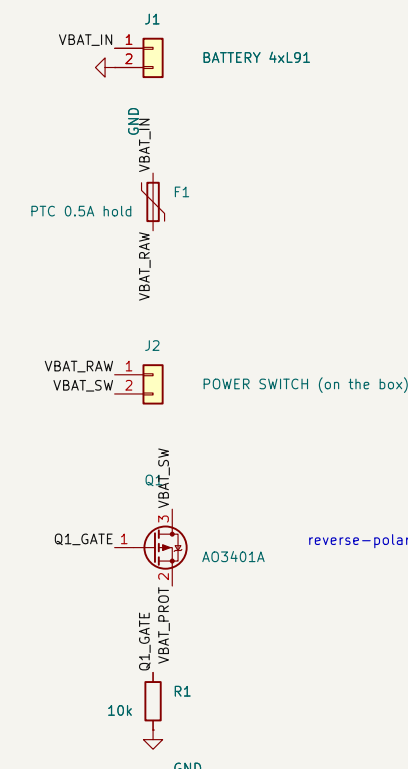












MCU STM32G474RET6 (same chip and pins as the NUCLEO-G474RE bench)

POWER battery -> switch -> reverse-polarity FET -> 3.3 V LDO






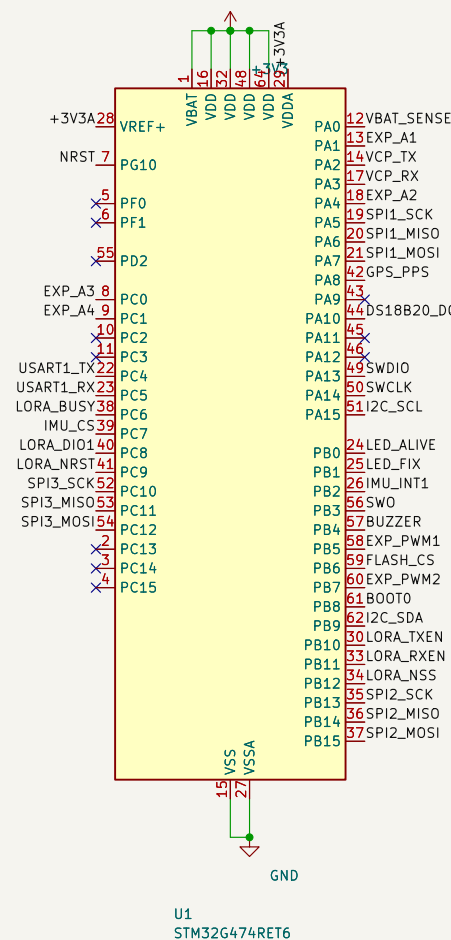


MODULE HEADERS (breakouts plug in)




TEST POINTS

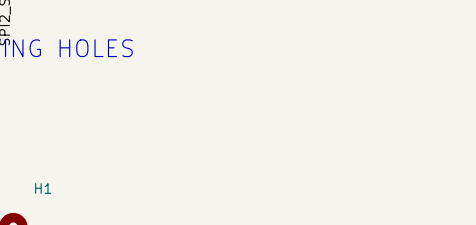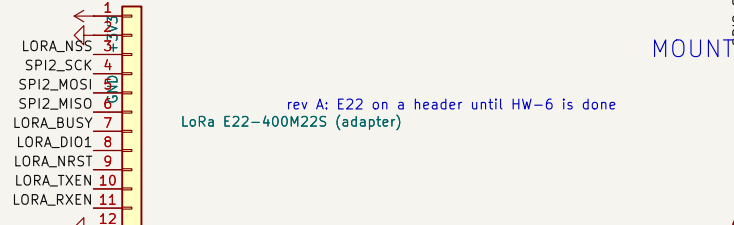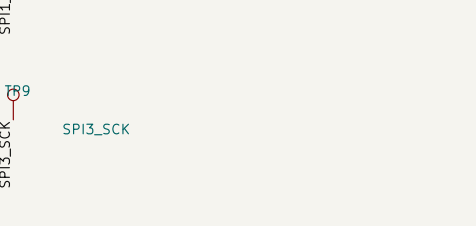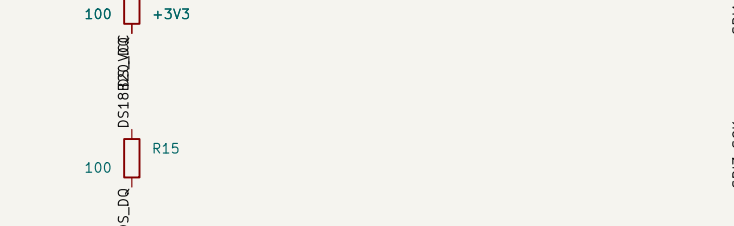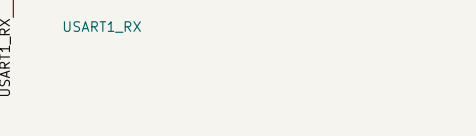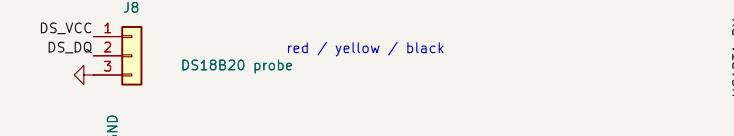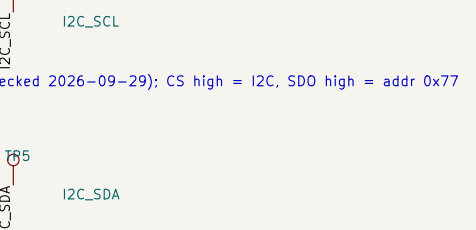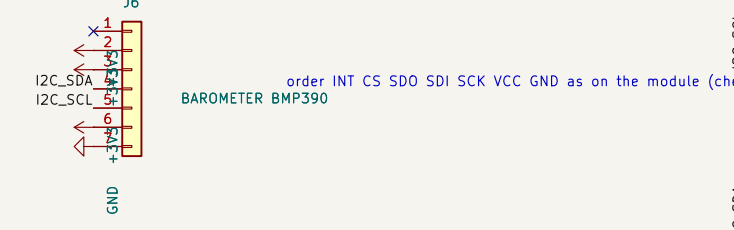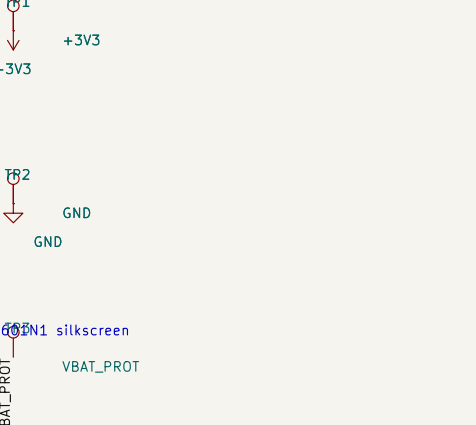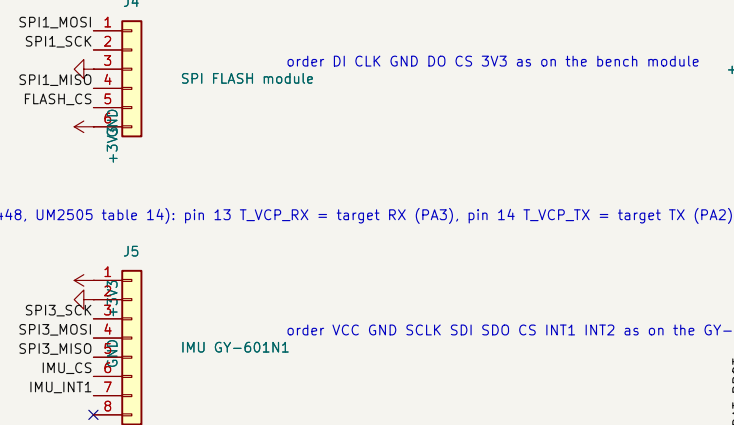



MOUNTING HOLES

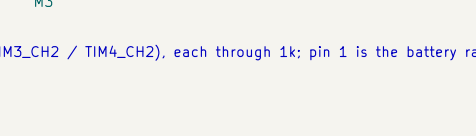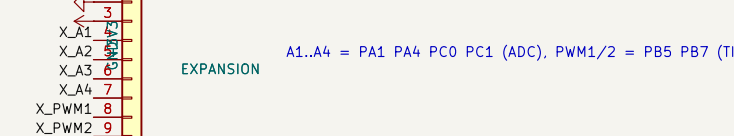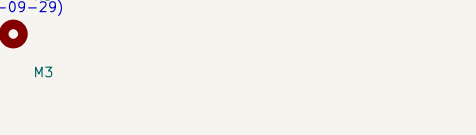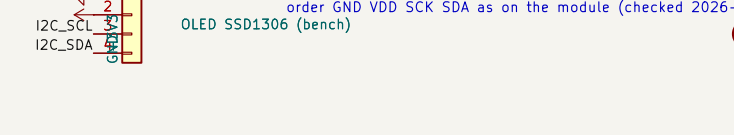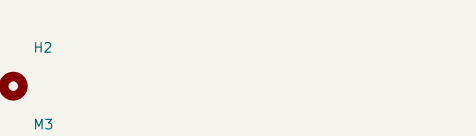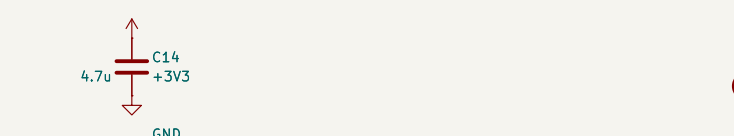

A1..A4 = PA1 PA4 PC0 PC1 (ADC), PWM1/2 = PB5 PB7 (TIM3_CH2 / TIM4_CH2), each through 1k; pin 1 is the battery rail, NOT 3.3 V (GND sits between it and the rest)

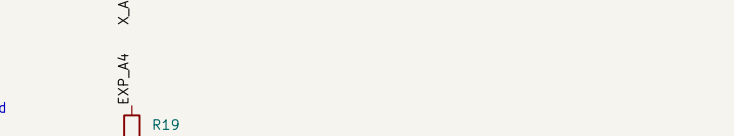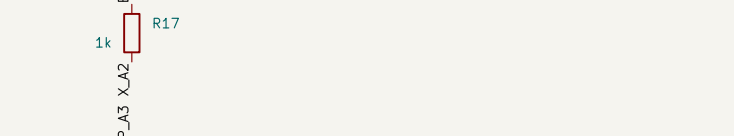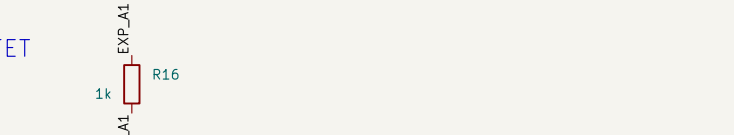


BUZ_P BUZ_N
1N4148W only needed if a magnetic buzzer is used

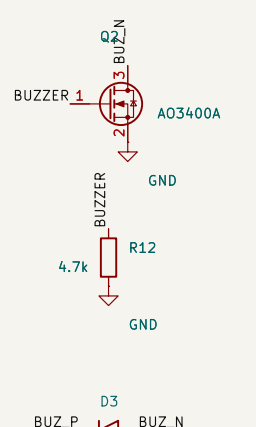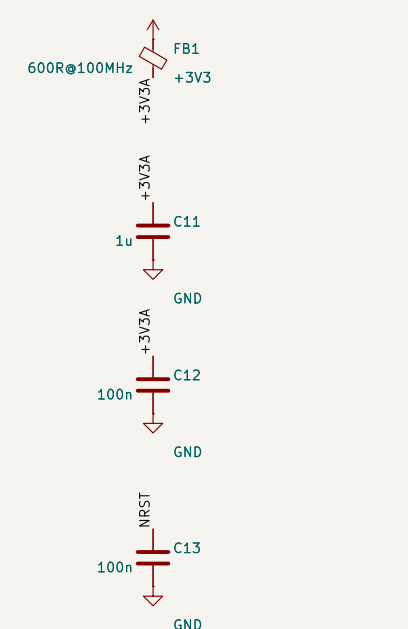

RECOVERY BUZZER battery rail, low-side FET

POWER FLAGS (for ERC)



MCU SUPPORT decoupling, VDDA filter, reset, STDC14

LEDS

01
LED1_A

LED2_A
GPS FIX blue

3228

BUZ_P  BUZ_N
1N4148W