


WIRING DIAGRAM · SKYG SPEED 120B

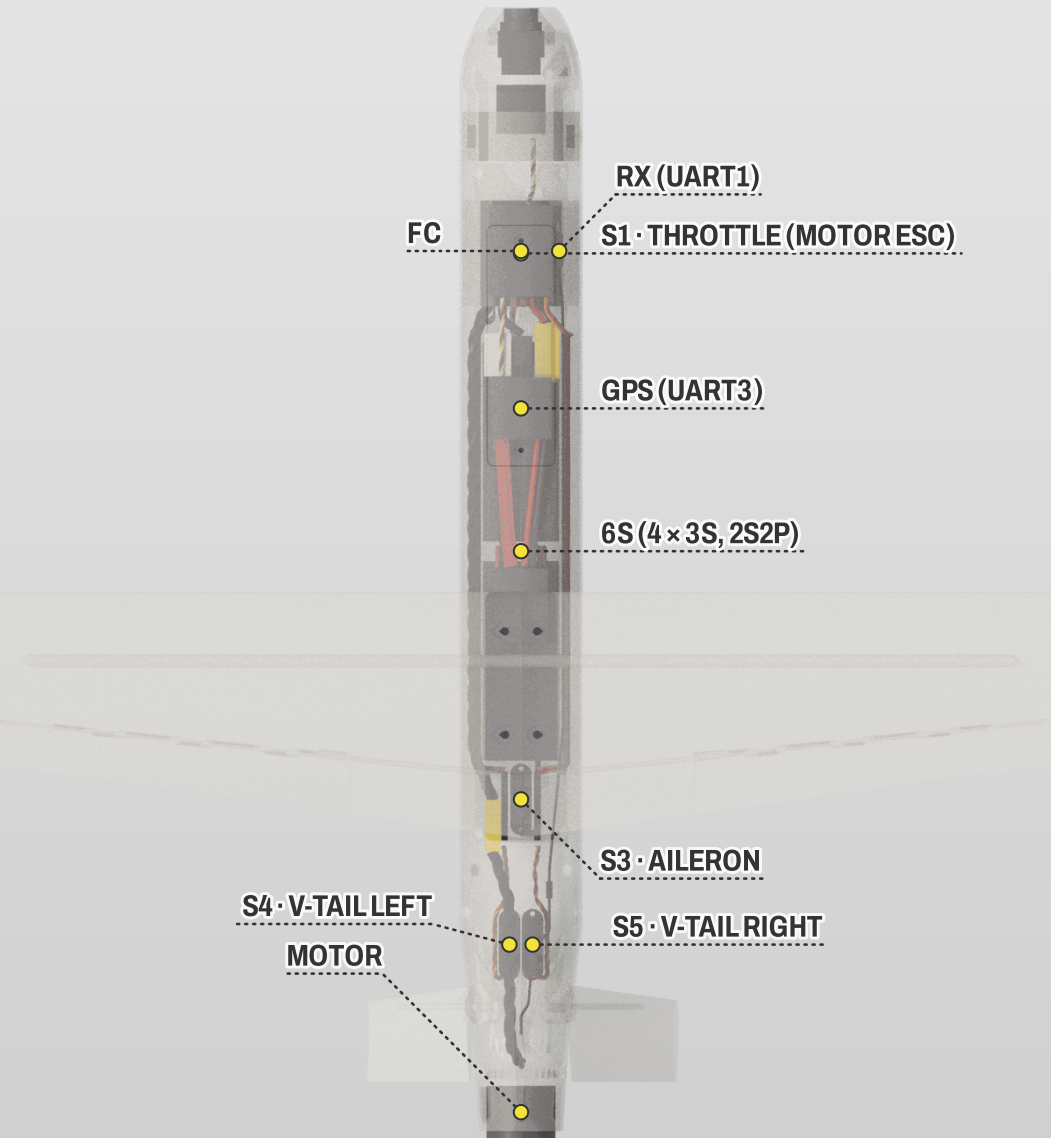

PAD	FUNCTION	DEVICE
S1	Throttle (motor ESC)	ESC (DSHOT300, bidirectional)
S2	Unused	Leave empty (DSHOT group with S1)
S3	Aileron	Aileron servo (ES9052MD, wing bay)
S4	V-tail left	Left tail-panel servo (ES9052MD, tail module)
S5	V-tail right	Right tail-panel servo (ES9052MD, tail module)

PORT	DEVICE	SETTING
UART1 (TX1/RX1) / SERIAL1	RadioMaster RP1 V2 ELRS receiver	SERIAL1_PROTOCOL = 23
UART3 (TX3/RX3) / SERIAL3	TBS M10Q GPS (compass on SDA/SCL)	SERIAL3_PROTOCOL = 5
UART5 (TX5/RX5) / SERIAL5	DJI O4 Air Unit (O4 noses only)	SERIAL5_PROTOCOL = 42 (O4 noses)
UART6 / SERIAL6	Wireless USB extender (ground setup)	SERIAL6_PROTOCOL = 2