


SKYG

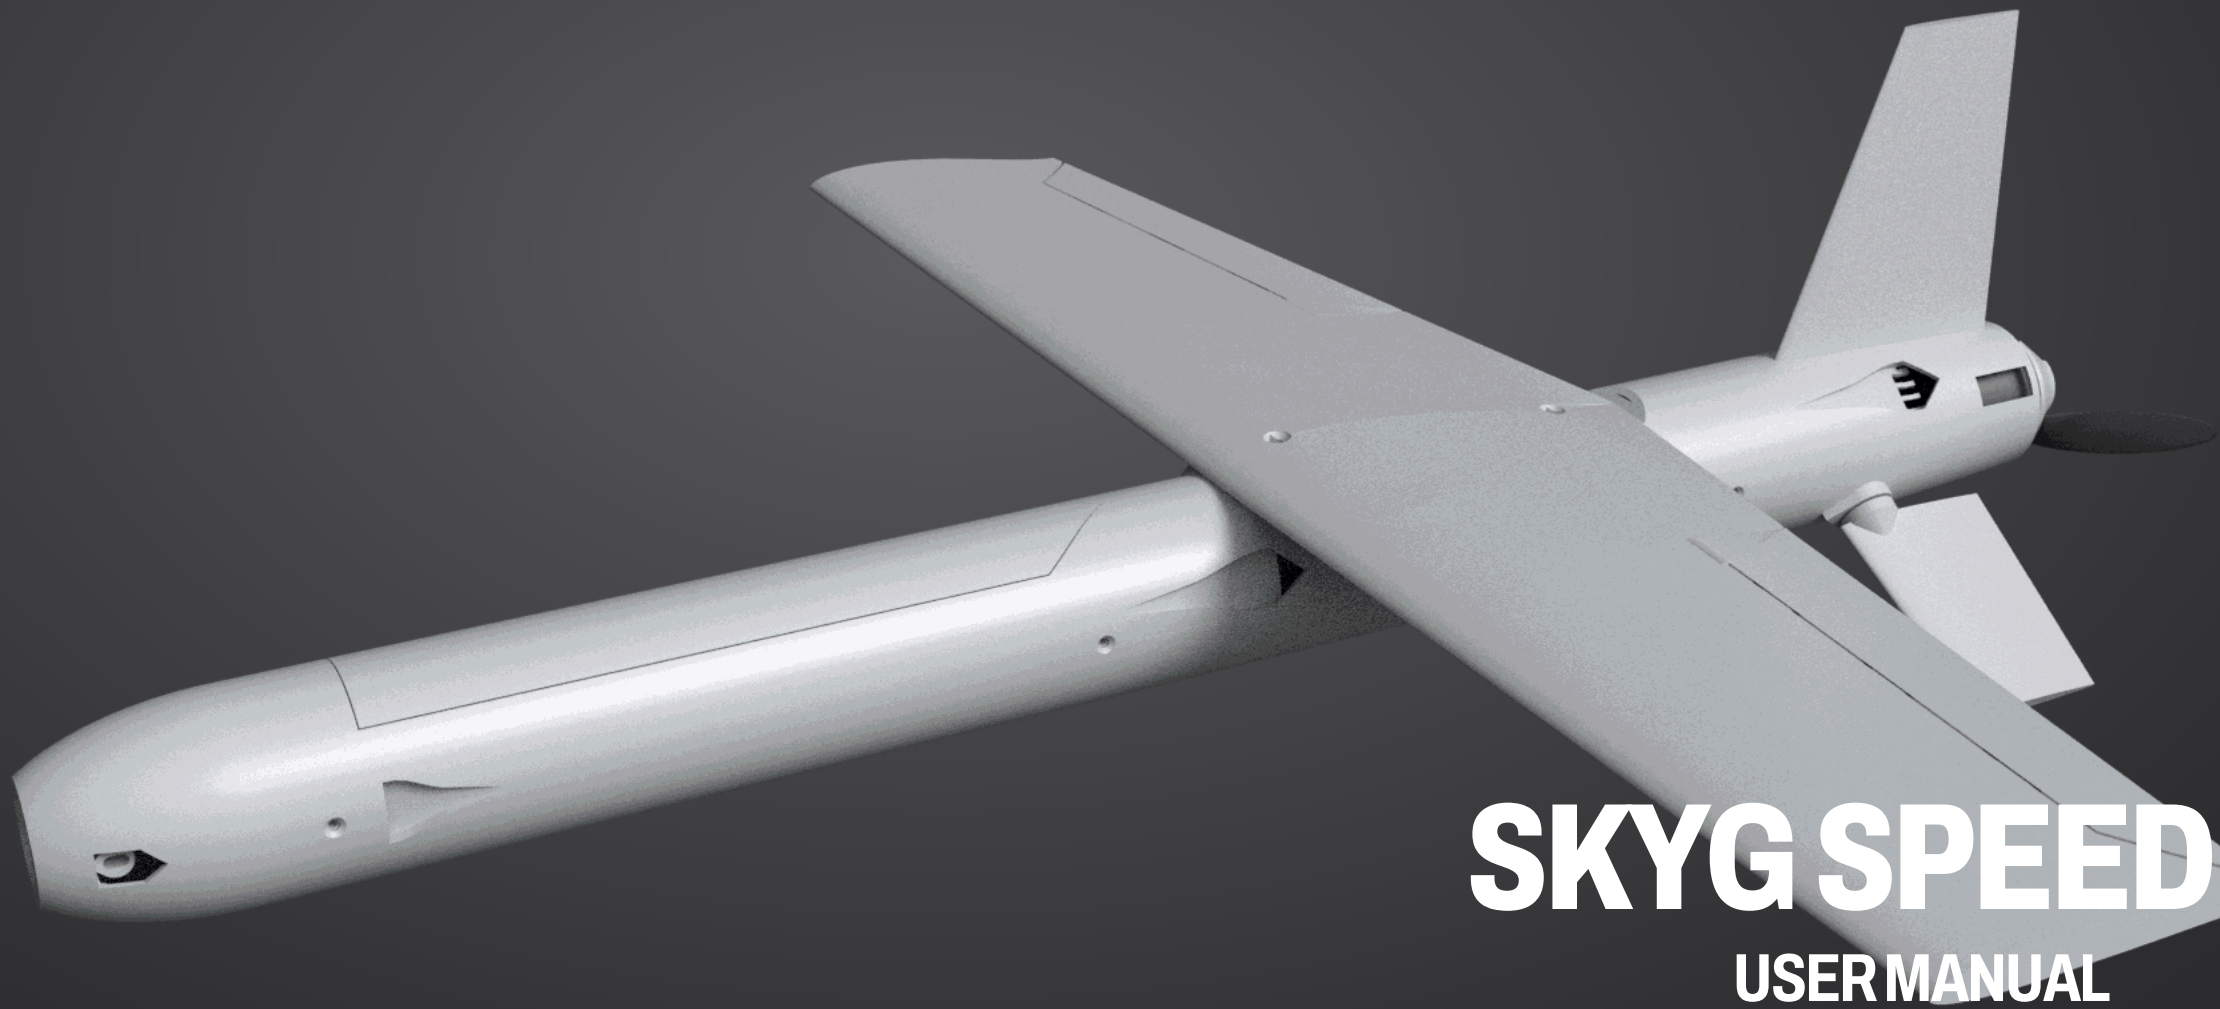

SKYG SPEED 90

USER MANUAL

V.1 · C6-8 · 2026-10-01

PACKAGE CONTENTS

Manual

SkyG Speed 90 user manual (this document).

STEP

Every printed part and the full assembly, for editing in any CAD program.

ArduPilot

Setup document and a starting .param file for the SpeedyBee F405 WING MINI.

Engineering

Design record, parts list (BOM.csv), test plan and verification report.

STL

Every printed part, in millimetres, ready for the slicer (print orientation: pages in this manual).

Wiring

The wiring diagram as a separate large page.

Viewer

Interactive 3D model (open the HTML file in a browser): every part exploded and in place, with notes.

TABLE OF CONTENTS

Introduction

General aircraft data	05
Aerodynamic design	06
Aerodynamic characteristics	07
Performance and speed stages	08
Compartment layout	10
Camera nose variants	11

Recommended equipment

Recommended electronics	13
Recommended accessories	14
Powertrain	15

Print settings

Print settings	17
Parts list	19

Parts orientation	20
-------------------	----

Assembly guide


Fuselage assembly	28
Wing assembly	29
Tail module	32
Equipment and wiring	38
Camera nose	41
Final assembly	43
Finishing build	44
Wiring diagram	45
ArduPilot configuration	46
Flight test and speed stages	47

SKYG SPEED 90


SkyG Speed 90 is a compact, hand-launched speed aircraft: a 3D-printed fuselage in three plug-together modules and a separate camera nose, a 430 mm straight wing on a carbon spar, and an all-moving canted tail driven by two micro servos. A single pusher motor sits in the tail cone behind the tail.

The airframe is printed in foaming PLA Aero on a 0.4 mm nozzle; steel and carbon parts carry the concentrated loads (spar, aileron hinge pins and torque rods, tail shafts). Six interchangeable camera noses take a micro FPV camera, a Raspberry Pi camera or a DJI O4 Air Unit, each with an open or a clear-dome face.

It is built for straight-line speed: about 88 m/s finished with the planned rpm governor, and about 64 m/s until that governor is fitted, flown up through never-exceed stages.

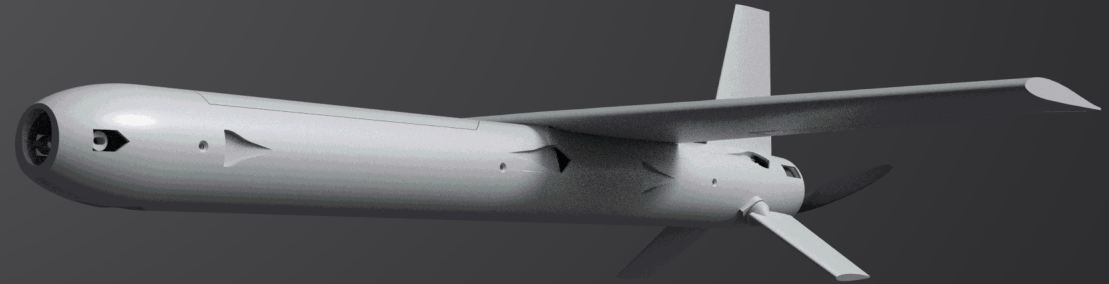

GENERAL AIRCRAFT DATA

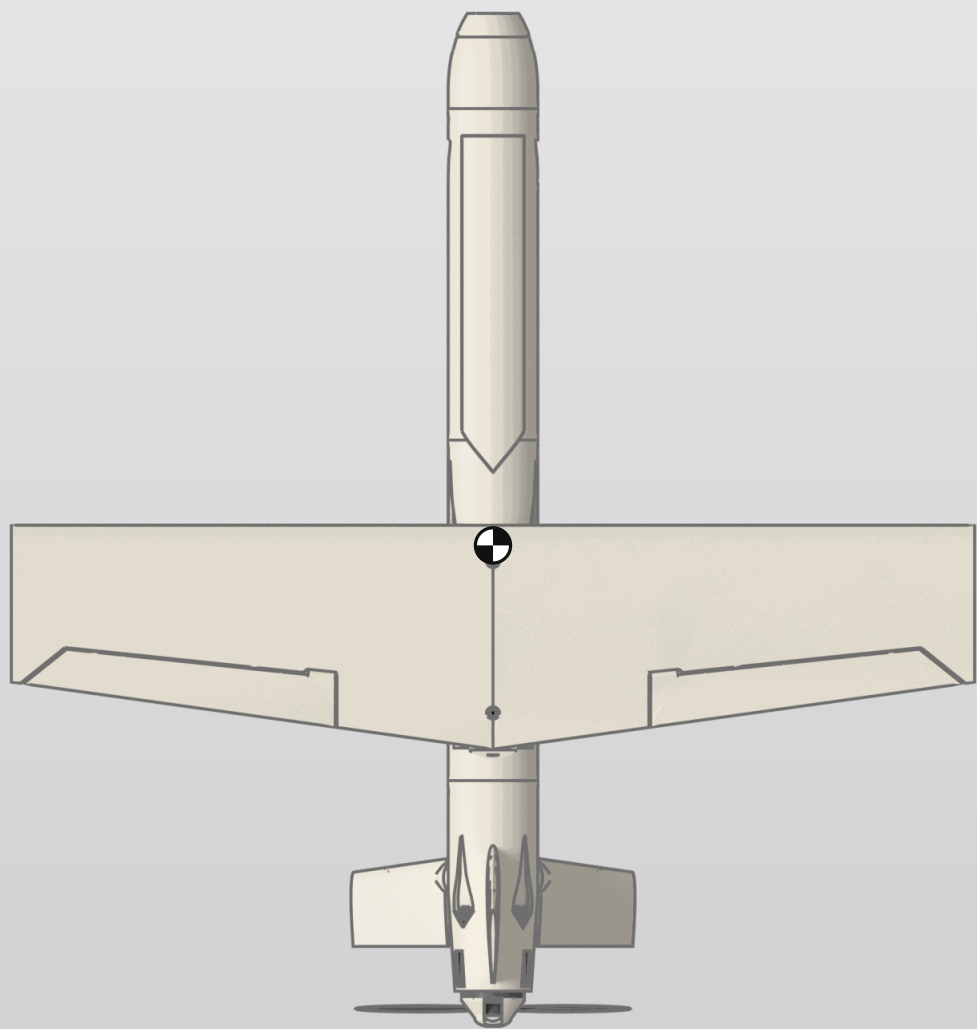


Wingspan	430 mm
Wing area	3.65 dm ²
Length	451 mm
Centre of gravity	9 mm behind the wing leading edge at the root
All-up weight	388 g (micro-camera nose)
Stall speed	13.0 m/s
Top speed (model)	87–88 m/s with the governor
Airfoil	MH45, ailerons 3° reflex
Root / tip chord	100 / 70 mm
MAC	86 mm
Aspect ratio	5.1
Wing loading	104 g/dm ²

AERODYNAMIC DESIGN


The wing uses the MH45 section, a low-moment reflexed profile, with both ailerons rigged 3° trailing edge up. The design CG is at 12 % of the mean chord, 6.5 % static margin ahead of the neutral point (x 252 mm from the nose datum): stable without a tail download penalty at speed.

Pitch and yaw come from two all-moving tail panels at 35° anhedral, mixed like a V-tail, with a fixed fin on top. The Dutch roll is lightly damped at low speed, so the flight controller's yaw damper is part of the setup.

Flutter of the wing, ailerons and tail panels was analysed (strip theory with the CAD-derived stiffness and masses): the lowest predicted instability is 134 m/s, above 1.2 × the 90 m/s top stage. The test plan opens the speed envelope in stages and measures the stiffness the margin depends on.

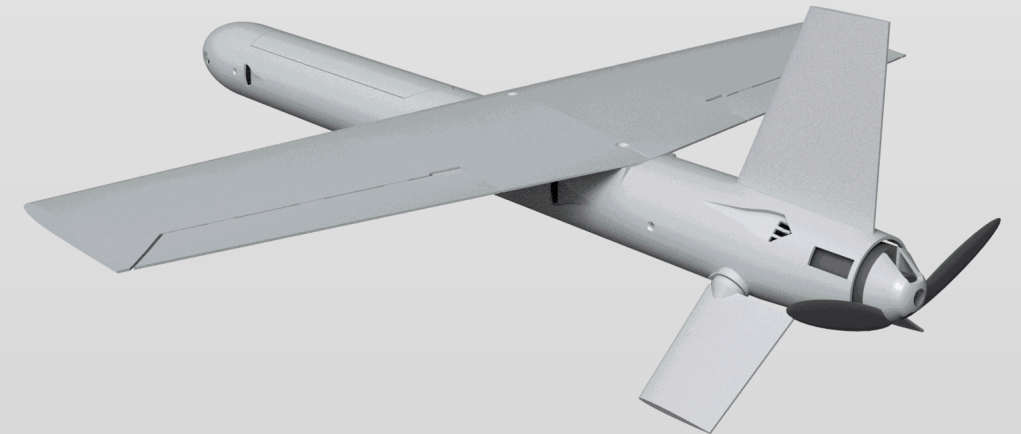

AERODYNAMIC CHARACTERISTICS

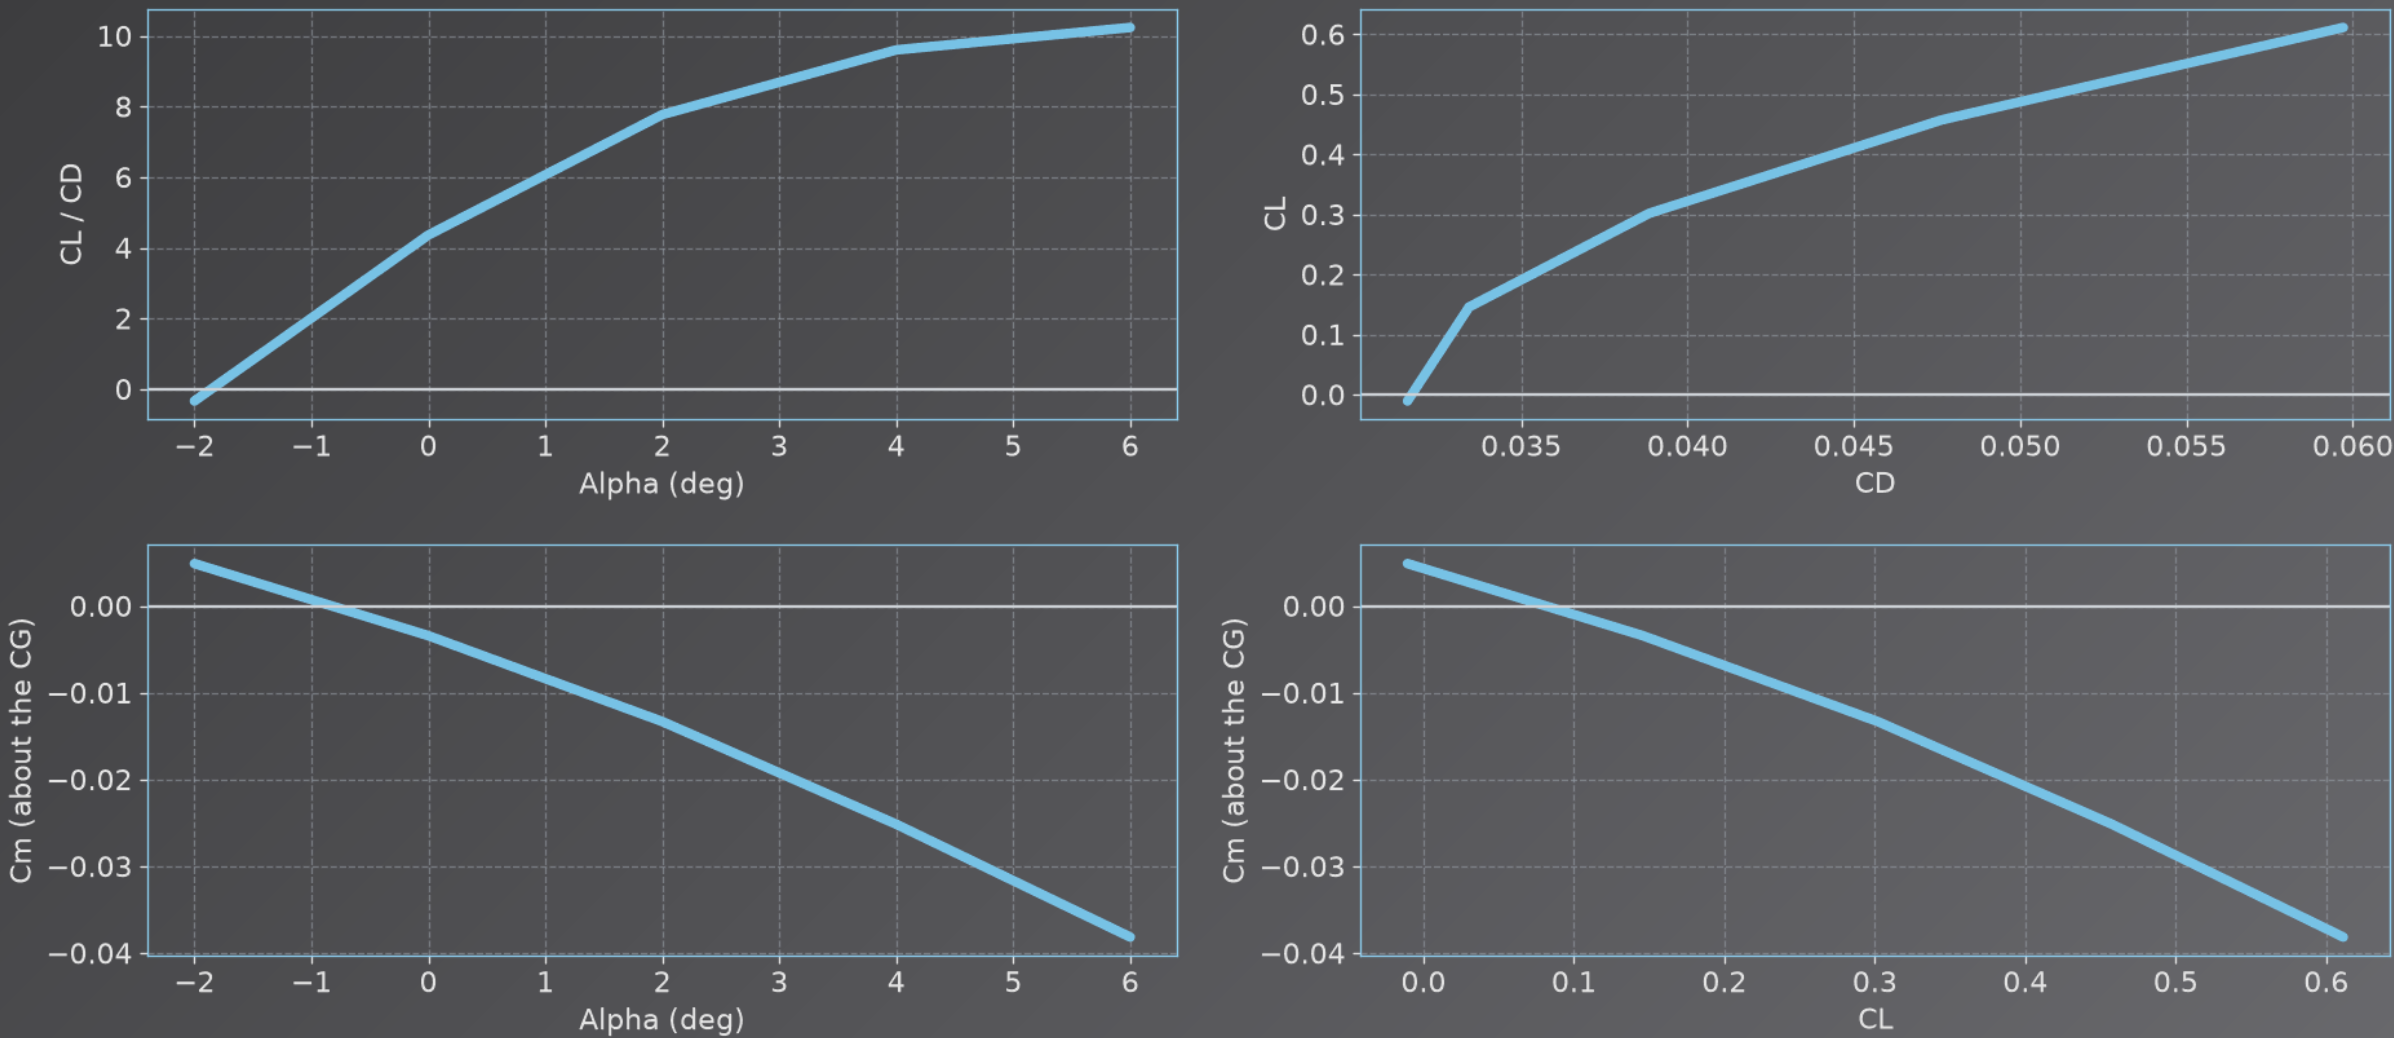

Whole aircraft, VSPAERO vortex lattice with the fuselage panels; best L/D 10.2 at 6.0° ; C_m about the design CG.

PERFORMANCE AND SPEED STAGES

Motor	2207 2550KV 4S racing motor
Propeller	APC 5x7.5E (LP05075E)
Battery	Tattu R-Line 4S 650 75C
Static thrust	1064 g at 51 A (thrust / weight 2.78)
Throttle cap (prop rpm rating)	70 %
Top speed	63–64 m/s now; 87–88 m/s with the governor
Full-throttle time	about 0.7 min per pack (bursts of ≤ 10 s)


Stage Vne	STAGE throttle limit	Expected level speed
30 m/s	27 %	24 m/s
35 m/s	32 %	29 m/s
40 m/s	36 %	33 m/s
45 m/s	41 %	38 m/s
50 m/s	45 %	41 m/s
55 m/s	50 %	46 m/s
60 m/s	54 %	49 m/s
65 m/s	59 %	54 m/s
70 m/s	64 %	58 m/s
75 m/s	69 %	62 m/s
80 m/s	70 % (needs the governor)	63 m/s
85 m/s	70 % (needs the governor)	63 m/s
90 m/s	70 % (needs the governor)	63 m/s

No airspeed sensor: each stage is held by a throttle limit on a transmitter switch (LAUNCH = full cap for the throw and climb-out only, STAGE = the limit). Level runs only; speed from GPS two-way passes.

FILES



Every printed part is supplied as STL (for printing) and STEP (for editing), plus the complete assembly as one STEP file. Left and right wing halves, ailerons and tail panels are separate files because they are mirror images. The interactive viewer in the package shows every part, purchased item and cable in place.

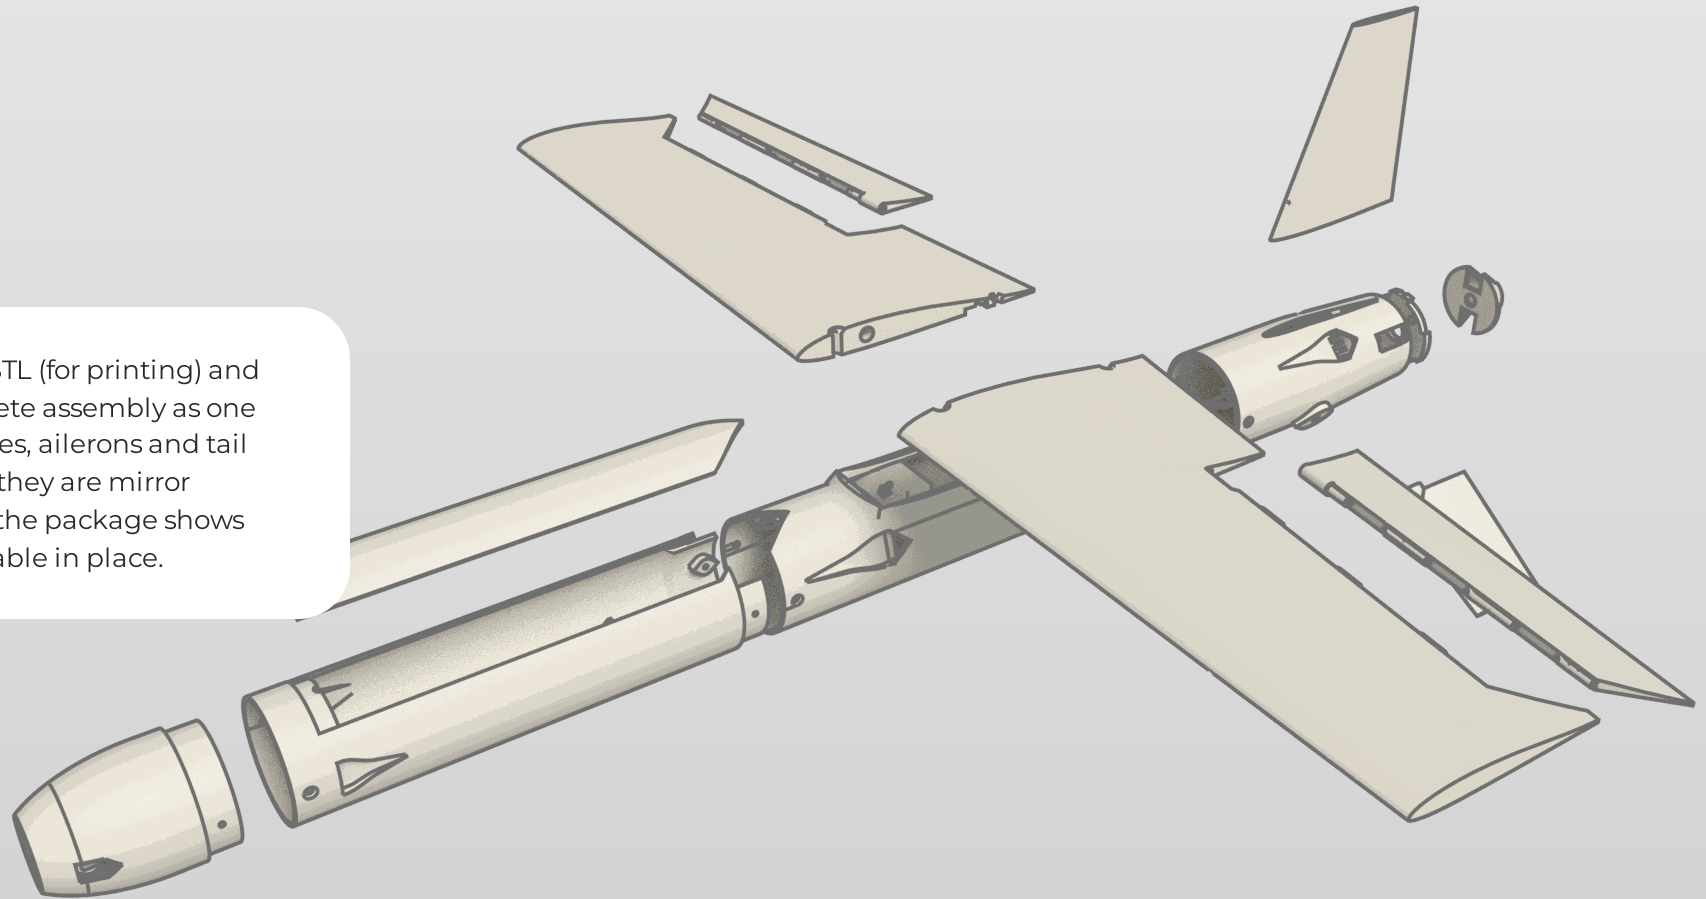

COMPARTMENT LAYOUT

BATTERY BAY

4S 650 pack, 60 × 31 × 21 mm max; slides x 98–130 for balance; rear stop at x 160

WING BAY


Flight controller stack with the ESC on top, receiver, aileron servo; reached with the wing off

TAIL MODULE


Two tail servos, pushrods, horns and the motor; plugs off at the MR30 and servo plugs

NOSE BAY


Camera and VTX (or the DJI O4 unit) in the removable nose

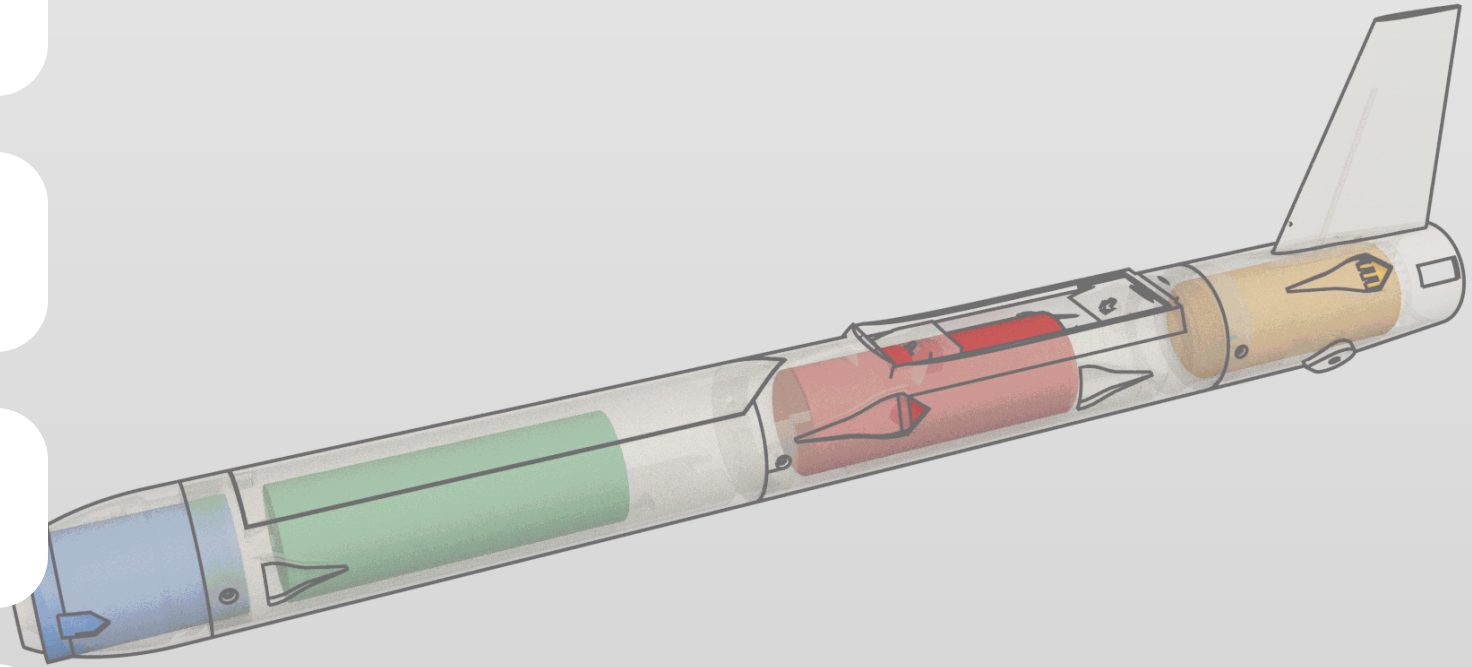

CAMERA NOSE VARIANTS

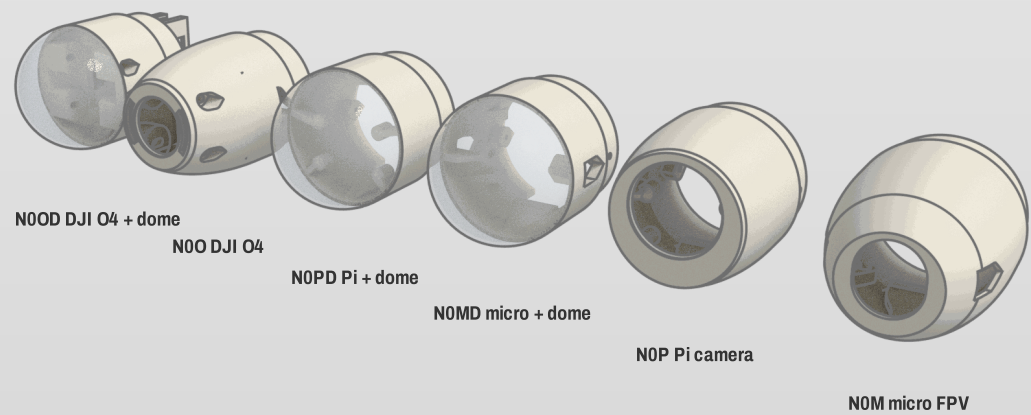

Nose	Camera	Battery centre for balance
NOM	19 mm micro FPV camera + 20 × 20 VTX	x 113 mm
NOP	Raspberry Pi Camera Module 3 (test option)	x 92 mm (at its stop + nose ballast)
N0MD	micro camera behind a 40 mm dome, nano VTX under the hatch	x 112 mm
N0PD	Pi camera behind a dome	x 97 mm (at its stop, no ballast)
N0O	DJI O4 Air Unit (Lite), ducted	x 116 mm
N0OD	DJI O4 behind a dome	x 118 mm

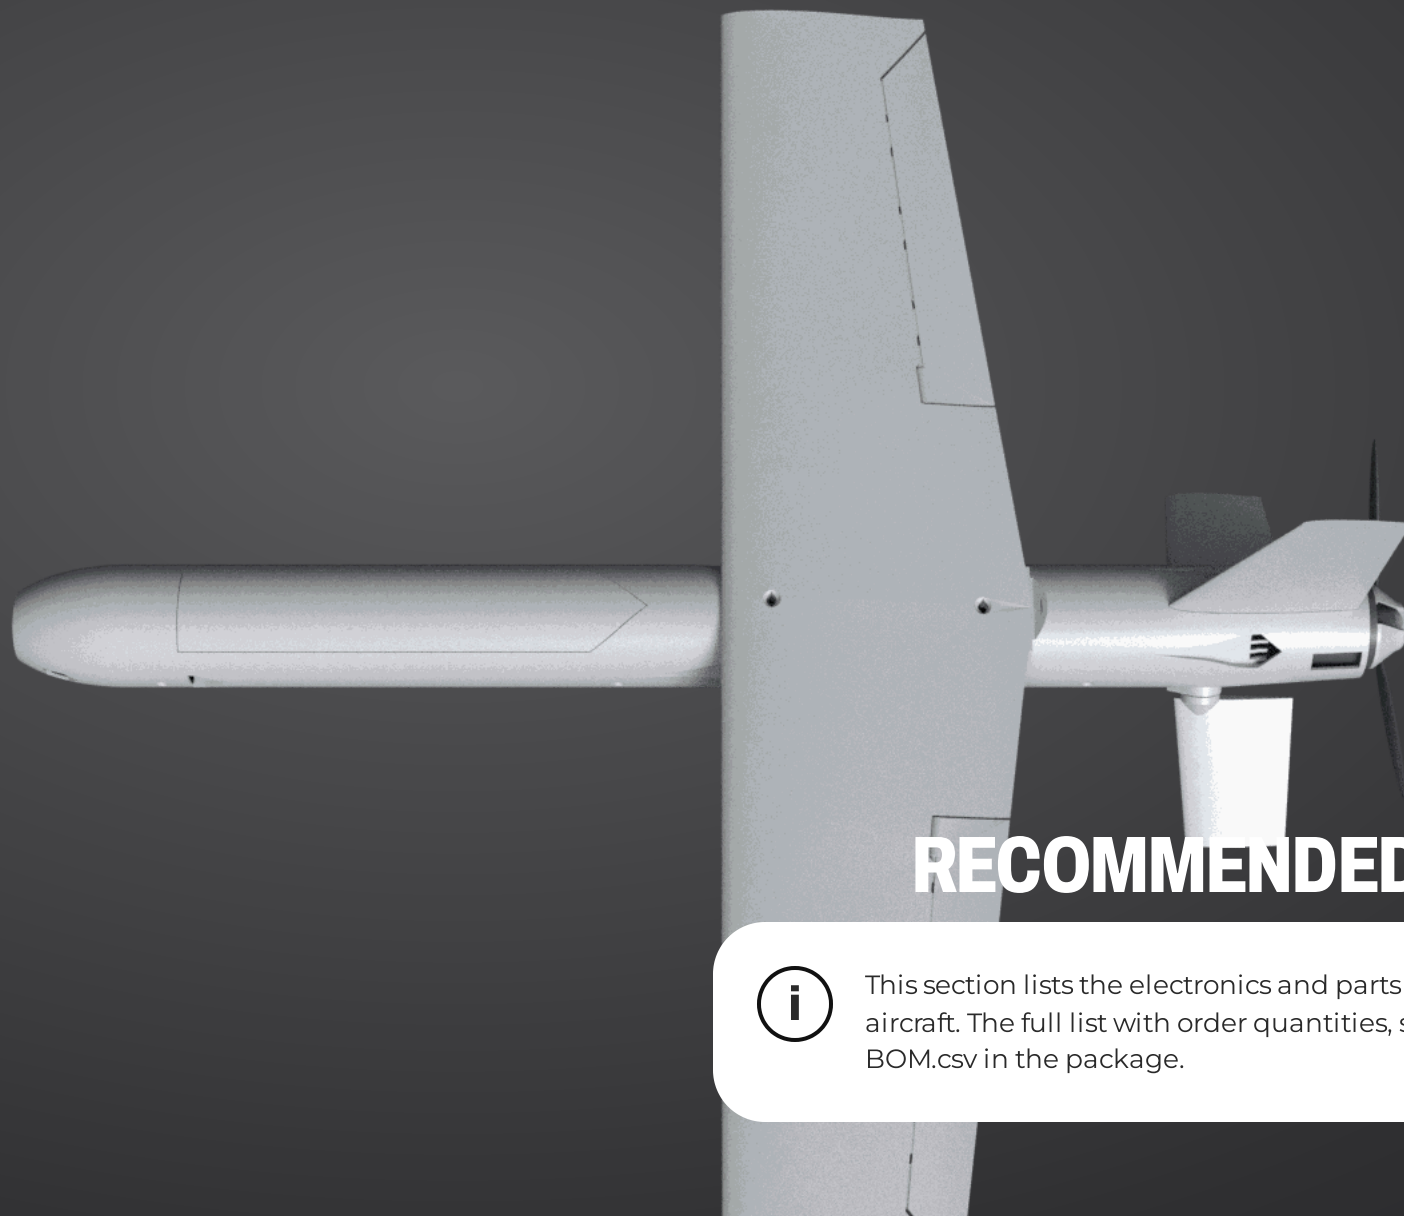

RECOMMENDED EQUIPMENT



This section lists the electronics and parts needed to complete the aircraft. The full list with order quantities, specifications and sources is BOM.csv in the package.

RECOMMENDED ELECTRONICS

COMPONENT	MODEL / SPECIFICATION
Motor	2207 2550KV 4S racing motor
Propeller (fixed)	APC 5x7.5E (LP05075E)
ESC	HDZero Halo 4in1 70A ESC AM32
Flight controller	SpeedyBee F405 WING MINI
GPS + compass	TBS M10Q GPS GLONASS (QMC5883 compass), 13.5 g
Servos	3 × Emax ES9052MD or ES9052MD HV (Promodelhobby, Turkey)
Flight battery	Tattu R-Line 4S 650 75C (60 x 31 x 21 mm, 74 g)
Receiver	RadioMaster RP1 V2
FPV camera	Micro 19 mm FPV camera, e.g. RunCam Phoenix 2 or Caddx Ratel 2
Video transmitter + antenna	20x20 analog or digital VTX with U.FL antenna
DJI O4 Air Unit (Lite)	DJI O4 Air Unit

RECOMMENDED ACCESSORIES

ITEM	QTY
XT30 connector pairs	1
Carbon tube	1
Music wire 2.0 mm	2
Pushrods 1.2 mm with Z-bend	4
Pushrod keepers for 1.2 mm wire	4
Z-bend pliers, 1.3 mm drill, small flat file	0
Nylon countersunk screw M3 x 16	1
M3 hex nut	2
M2 x 6 countersunk screws (joints)	6
Magnets 3x2 mm	2
Magnets 3x1 mm	2
Kapton / thin clear tape	as needed
Adhesives	as needed
Velcro strap + hook/loop	1

ITEM	QTY
Heat shrink + silicone wire	as needed
Silver steel rod 2.5 mm	2
Brass tube 3 mm	2
MR30 connector pairs	1
Servo extension leads 100 mm	2
Motor screws M3	4
Glass skin + finish	14 g
Nylon countersunk screw M3 x 8	1
M2 x 5 screws	4
Servo strap / zip tie + foam tape	1
Steel rod 1.5 mm	2
Vent tape	1
15T servo arms	1
Dupont housings + crimps (1-pin, 4-pin)	3




Motor and prop. 2207 2550 KV class 4S racing motor (e.g. 2207 2550KV: 27.9-28 mm bell, about 21.5 mm body, 33.5 mm with the 5 mm prop shaft, 33 g, 16 x 16 mm M3). Prop: APC 5 x 7.5E fixed thin-electric pusher (LP05075E, 5 mm bore, hub 12.7 x 7.1 mm, 30,000 rpm rating), rpm-governed at 29,500.

Throttle cap. A 5-inch prop is rated about 30,000 rpm. On a full 4S pack the unloaded prop would exceed it at full throttle, so the flight controller caps the throttle at 70 %. Never raise it, and inspect the blades after every thrust-stand run and flying day.

rpm governor (open item). This version is designed around a governor that holds the prop at 29,500 rpm, which lets it use the full rated rpm in level flight. ArduPilot's governor script does not run on the F405 flight controller, so until an H7 flight controller or a governing ESC is fitted the throttle cap above applies and the top speed is about 64 m/s; the 80–90 m/s stages need the governor.

Battery. Tattu R-Line 4S 650 75C (60 x 31 x 21 mm, 74 g); XT30. Full throttle in bursts of ≤ 10 s, then ≥ 30 s at low throttle: the ESC lives on its thermal mass. Static thrust in the model: 1064 g at 51 A; confirm on a thrust stand before the first flight.

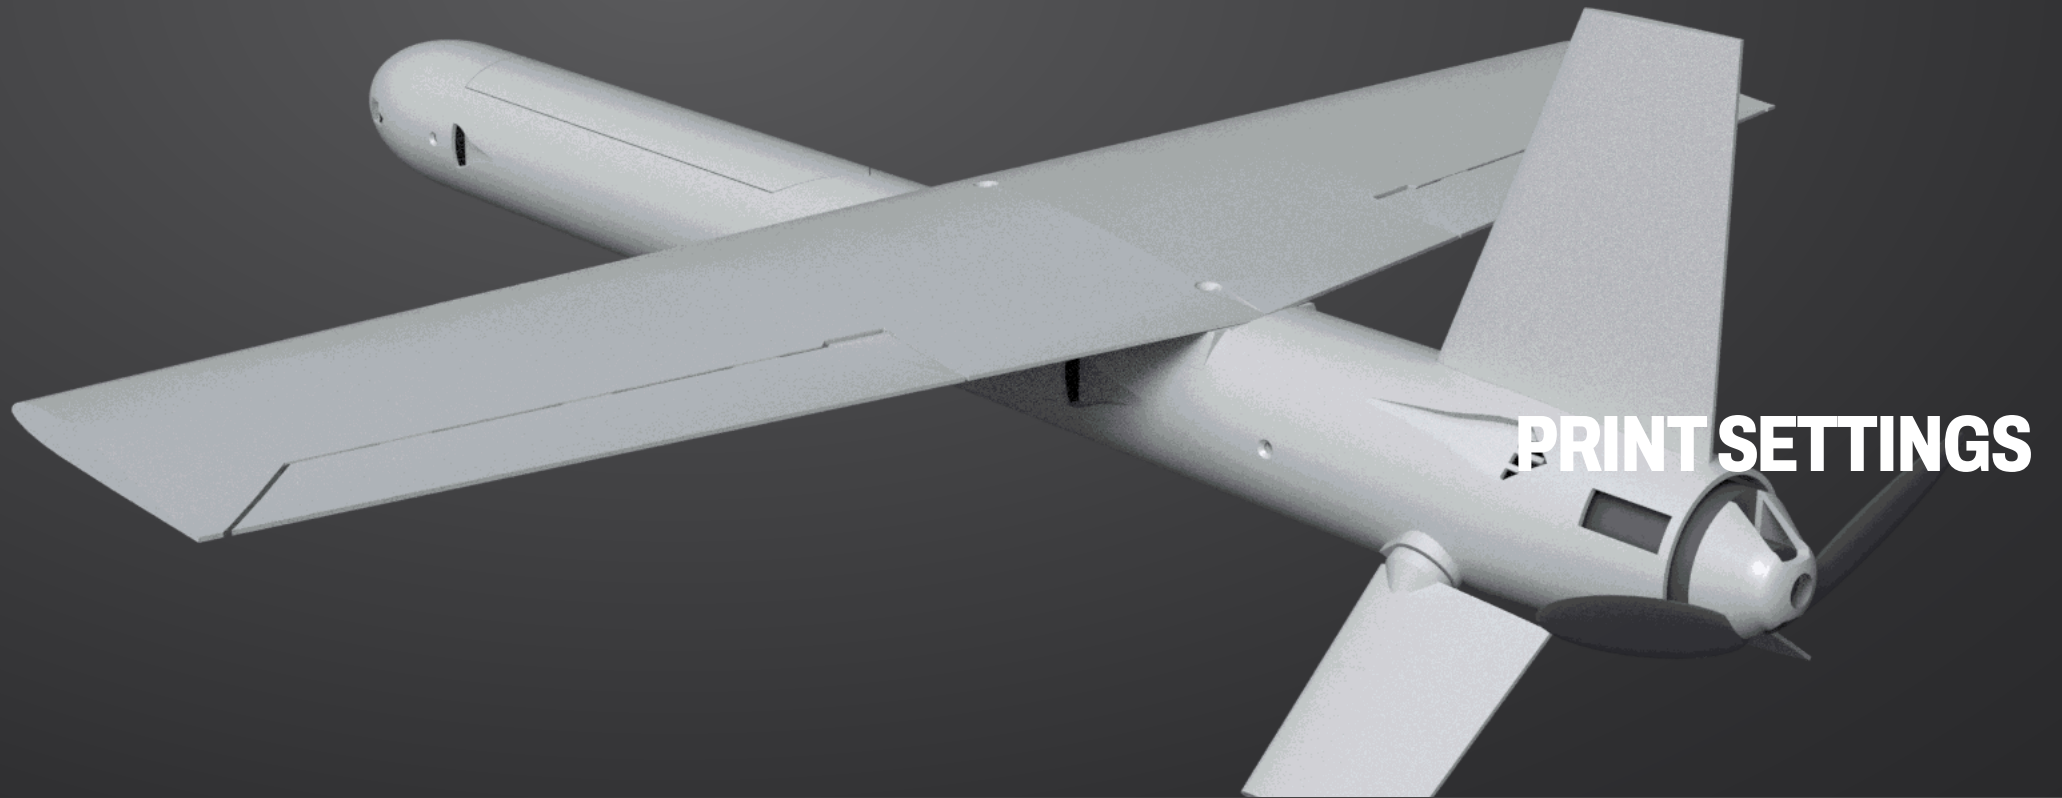

PRINT SETTINGS



The airframe is designed for **Bambu PLA Aero** (foaming, lightweight) on a **0.4 mm nozzle** and **0.20 mm layers**; every part fits a Bambu H2S or H2D build volume. The tail module may be printed in ASA Aero, the motor plate and spinner in PETG-CF.

GENERAL GUIDELINES

- Fuselage, nose and hatch shells: 2 walls, no infill (the internal ribs and bosses are modelled).
- Wing halves and ailerons: 1 wall, 5 % gyroid.
- Tail panels: 2 walls, 10 % gyroid. Fin: 2 walls, 15 %.
- Motor plate and spinner: PETG-CF, 4 walls, 40 %.
- Tall standing parts: 5 mm brim, slow outer wall, enclosure door closed.

SUPPORTS: OFF

Every part is designed to print without supports in the orientation shown (DFAM rules, print audit: all parts pass). Keep supports switched off. The only bridge longer than 12 mm is under the rear wing-screw nut in F2, hidden inside the wing bay: if it sags on your printer, print a small support under it there. Check the top of the aileron's torque-rod bore on the first aileron.

PRINT SETTINGS

FIRST PART AND WEIGHT CHECK

Print F1 first and weigh it. If it is more than 15 % over the sliced mass (about 17 g), lower the PLA Aero temperature or flow before printing the rest; foaming filaments vary with temperature, humidity and the enclosure.

COUPON TESTS

Before the full build, print the last 25 mm of F1 with the first 25 mm of F2, and the F2/F3 and nose joints the same way: every joint must slide on and off by hand and the M2 screws must bite. Print a 40 mm wing-root section and check the spar fit.

SLICER

The masses in this manual come from Bambu Studio with the H2S 0.4 mm profile and the walls/infill listed on the orientation pages. Import the STL files in millimetres; keep each part in the orientation shown.


PARTS LIST

PART	MATERIAL	MASS
N0M NOSE (MICRO FPV)	PLA Aero	6.0 g
N0P NOSE (PI CAMERA)	PLA Aero	5.7 g
N0MD NOSE (MICRO + DOME)	PLA Aero	3.7 g
N0PD NOSE (PI + DOME)	PLA Aero	4.1 g
N0O NOSE (DJI O4)	PLA Aero	7.5 g
N0OD NOSE (DJI O4 + DOME)	PLA Aero	6.1 g
F1 FUSELAGE FRONT	PLA Aero	17.2 g
F2 FUSELAGE MAIN	PLA Aero	20.6 g
F3 TAIL MODULE	ASA Aero	7.2 g
HF FRONT HATCH	PLA Aero	3.8 g
FN FIN	PLA Aero	5.4 g
VTX SHELF (N0M)	PLA Aero	0.4 g
DOMER RING	PLA Aero	0.5 g
HG GPS CARRIER	PLA Aero	1.1 g

PART	MATERIAL	MASS
WR WING HALF RIGHT	PLA Aero	15.4 g
WL WING HALF LEFT	PLA Aero	16.3 g
ARAILERON RIGHT	PLA Aero	2.0 g
ALAILERON LEFT	PLA Aero	2.0 g
SR TAIL PANEL RIGHT	PLA Aero	3.0 g
SL TAIL PANEL LEFT	PLA Aero	2.9 g
M1 MOTOR PLATE	PETG-CF	1.9 g
SP SPINNER	PETG-CF	1.7 g

One aircraft with the N0M nose: 108 g printed. Only one camera nose is needed; the others are options.


PARTS ORIENTATION

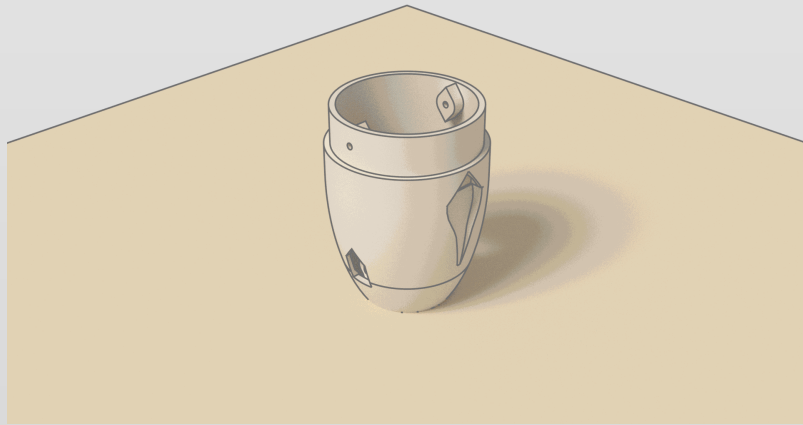

N0M NOSE (MICRO FPV)

FACE DOWN, SPIGOT UP


2 WALLS · 0 % INFILL · PLA AERO

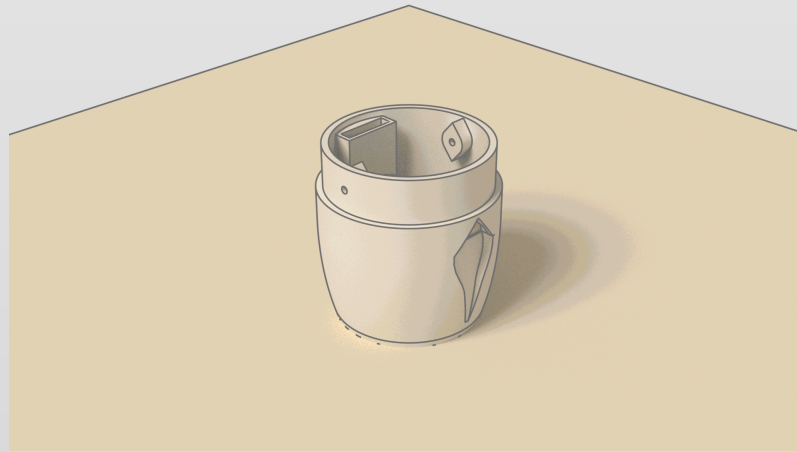

N0P NOSE (PI CAMERA)

FACE DOWN, SPIGOT UP

2 WALLS · 0 % INFILL · PLA AERO

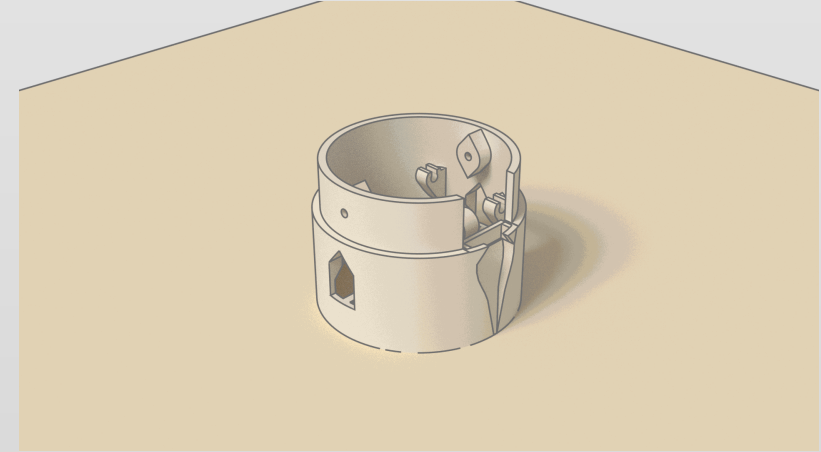


N0MD NOSE (MICRO + DOME)

FRONT FACE DOWN

2 WALLS · 0 % INFILL · PLA AERO


PARTS ORIENTATION

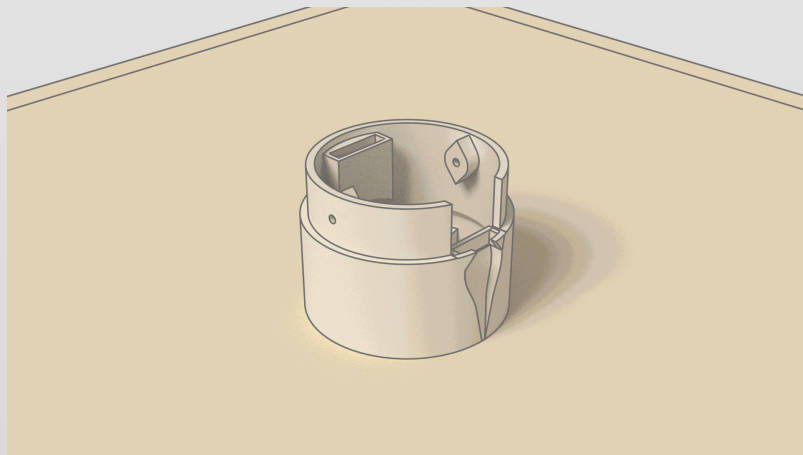

N0PD NOSE (PI + DOME)

FRONT FACE DOWN


2 WALLS · 0 % INFILL · PLA AERO

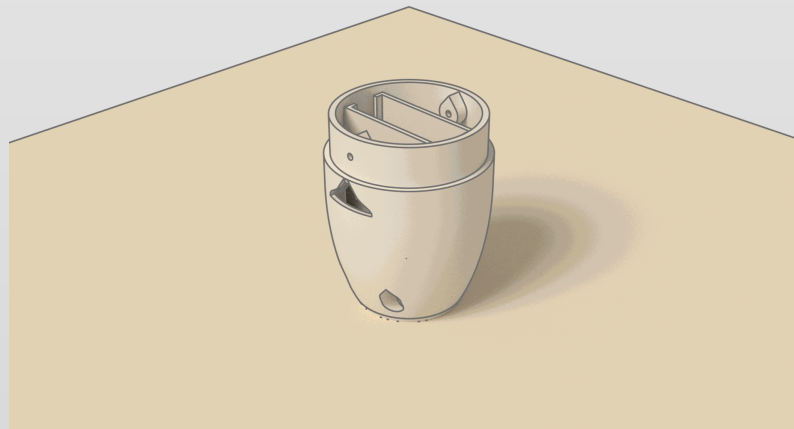

N00 NOSE (DJI O4)

FACE DOWN

2 WALLS · 0 % INFILL · PLA AERO

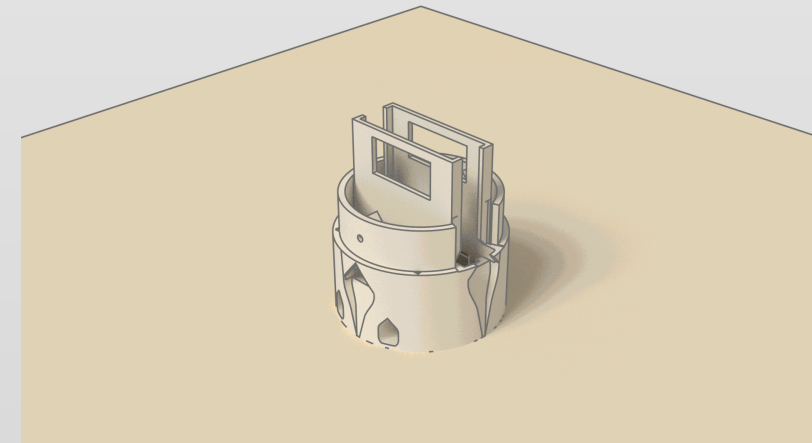


N00D NOSE (DJI O4 + DOME)

FRONT FACE DOWN


2 WALLS · 0 % INFILL · PLA AERO

PARTS ORIENTATION

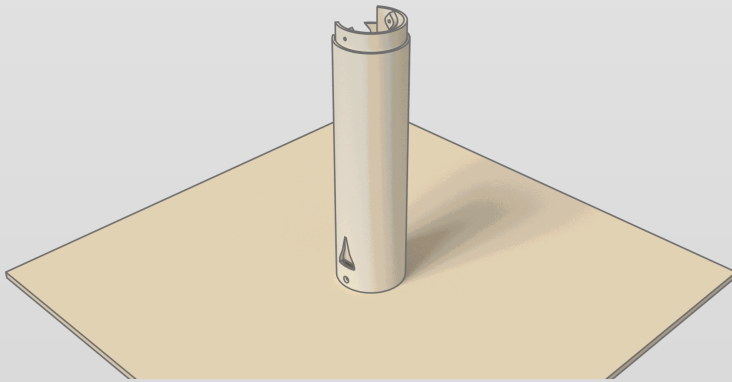


F1 FUSELAGE FRONT

FRONT END DOWN · SPIGOT UP · 5 mm BRIM
2 WALLS · 0 % INFILL · PLA AERO

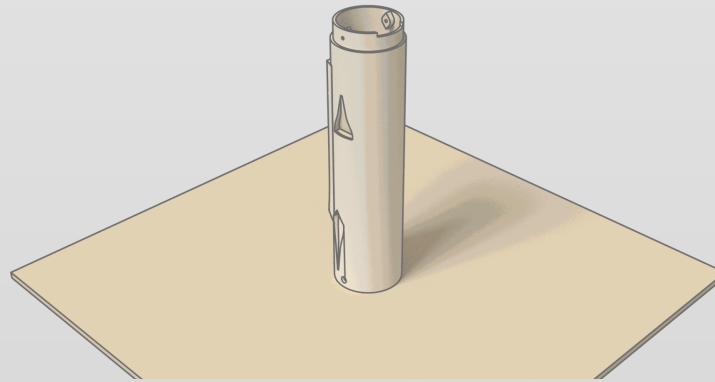

F2 FUSELAGE MAIN


FRONT END DOWN · SPIGOT UP · 5 mm BRIM
2 WALLS · 0 % INFILL · PLA AERO

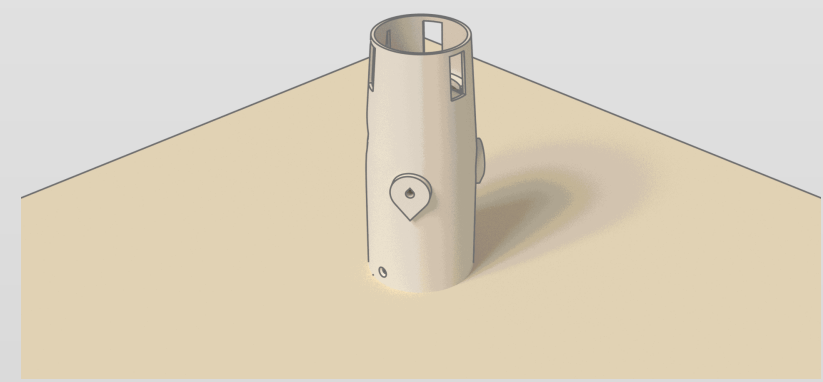

F3 TAIL MODULE


FRONT END (SOCKET) DOWN · 5 mm BRIM
2 WALLS · 0 % INFILL · ASA AERO

PARTS ORIENTATION

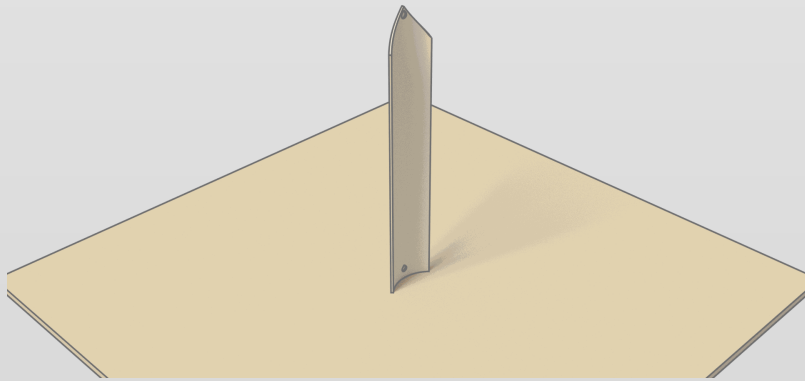


HF FRONT HATCH

STANDING, FRONT END DOWN
2 WALLS · 0 % INFILL · PLA AERO

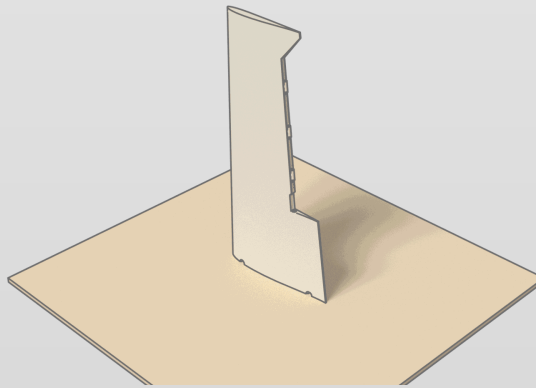

WR WING HALF R / L


ON THE ROOT RIB
1 WALLS · 5 % INFILL · PLA AERO

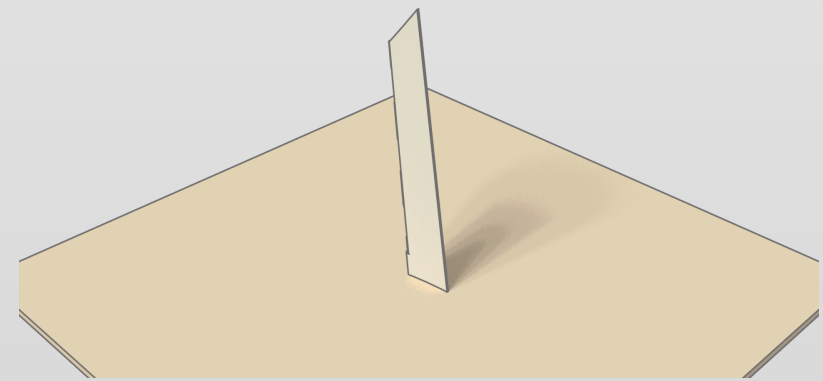

AR AILERON R / L

ON THE INBOARD END
1 WALLS · 5 % INFILL · PLA AERO


PARTS ORIENTATION

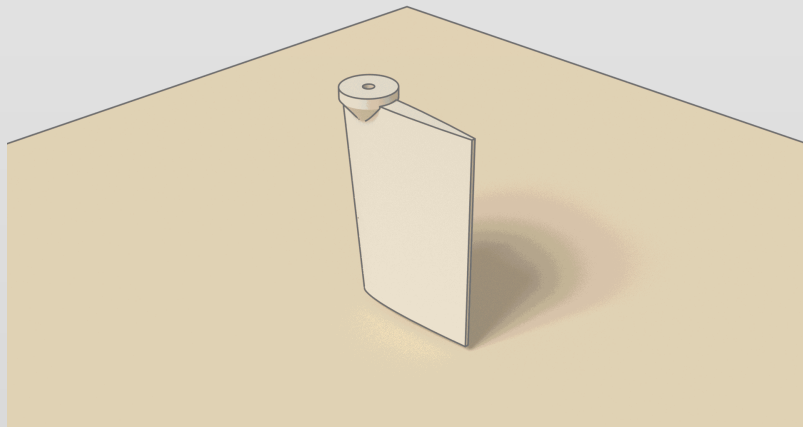

SR TAIL PANEL R / L

TIP DOWN, HUB UP


2 WALLS · 10 % INFILL · PLA AERO

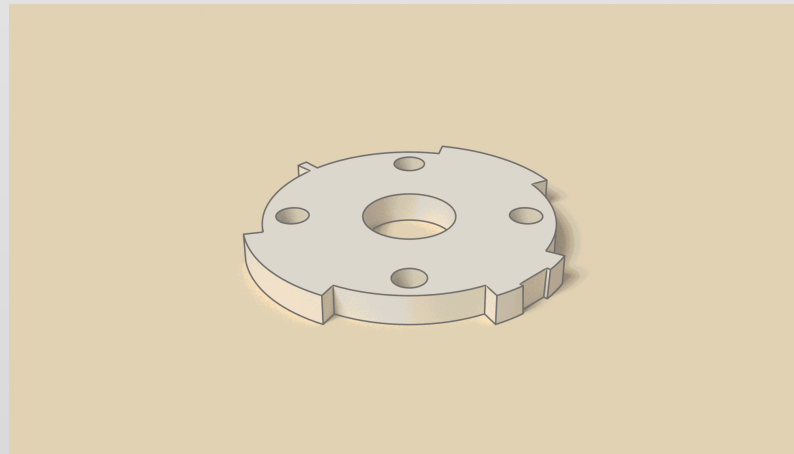

M1 MOTOR PLATE

FLAT

4 WALLS · 40 % INFILL · PETG-CF

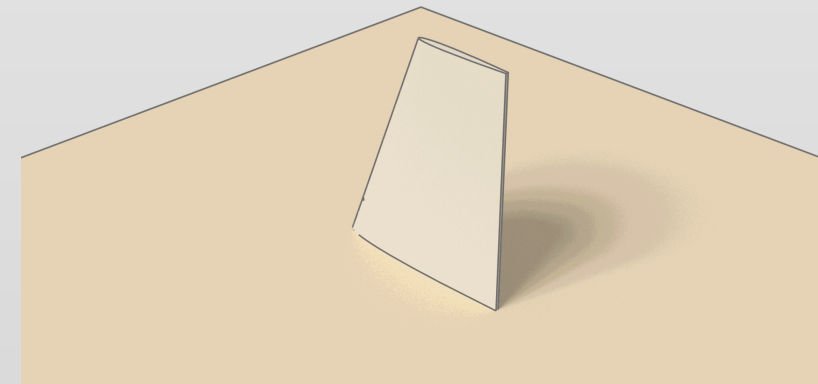


FN FIN

ON THE ROOT TAB

2 WALLS · 15 % INFILL · PLA AERO


PARTS ORIENTATION



SP SPINNER

BACKPLATE DOWN


4 WALLS · 40 % INFILL · PETG-CF

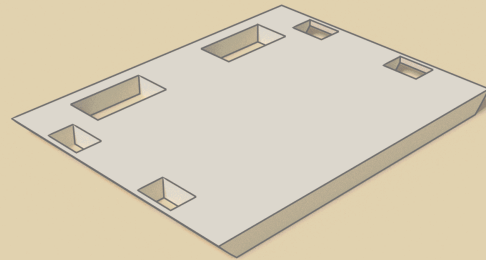

VTX SHELF (NOM)

FLAT

2 WALLS · 15 % INFILL · PLA AERO




DOME RING

LIP DOWN

2 WALLS · 15 % INFILL · PLA AERO


PARTS ORIENTATION

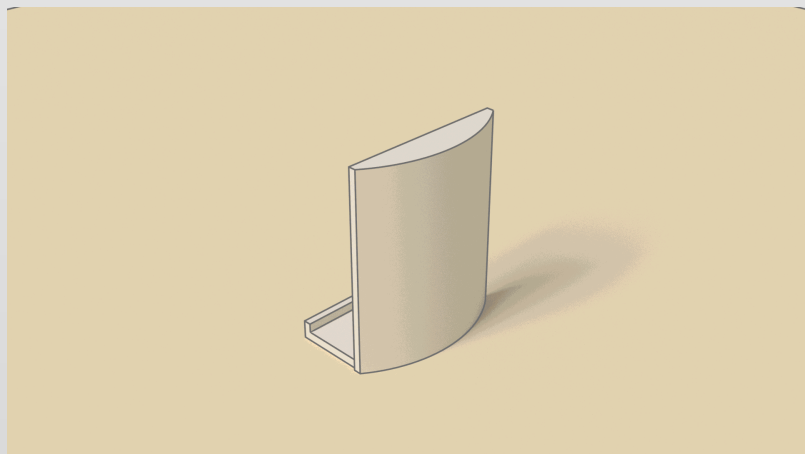

HG GPS CARRIER

ON ITS REAR WALL

2 WALLS · 15 % INFILL · PLA AERO

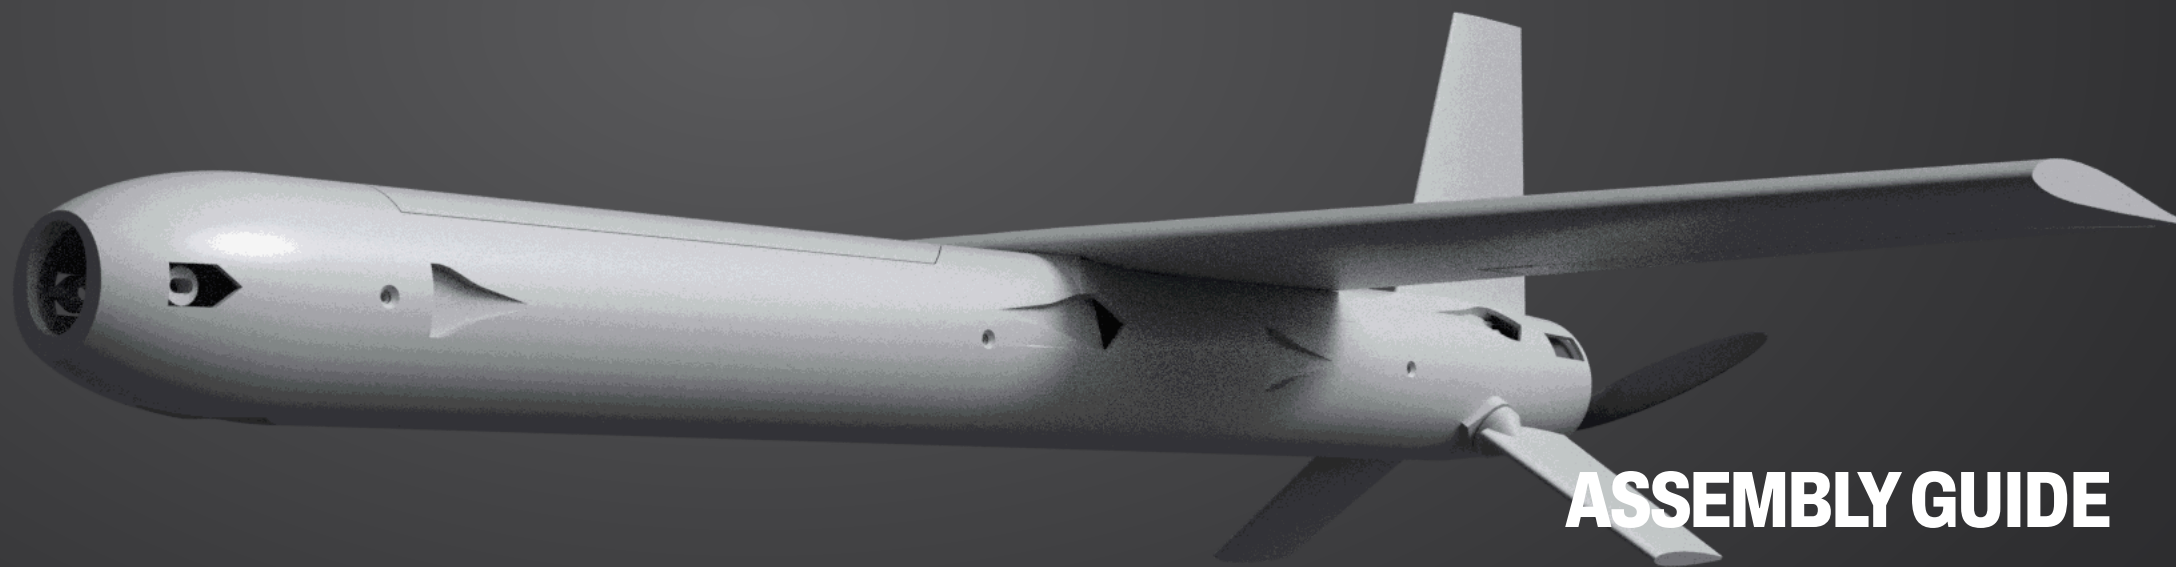


FUSELAGE ASSEMBLY



The fuselage is four modules on spigot joints: the camera nose, F1, F2 and the F3 tail module. Each joint is held by two M2 × 6 countersunk screws from the sides into bosses inside the spigot, their heads flush in the countersinks; nothing is glued, so every module comes off for service.

Clean any stringing from the spigots first. They must slide in by hand.

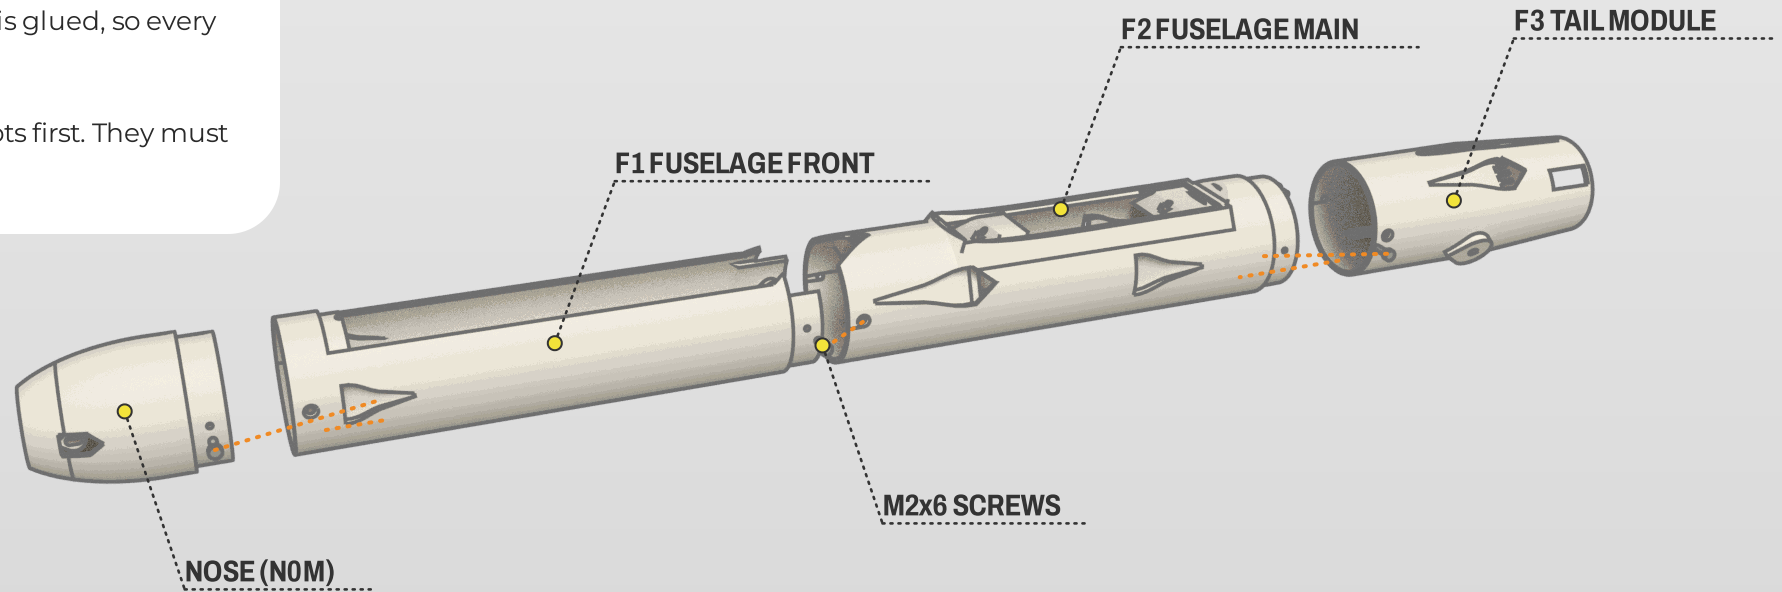


M2 × 6 SCREWS

WING ASSEMBLY



Cut one 400 mm length of 5 × 3 mm carbon tube and slide it through both wing halves (200 mm into each). Epoxy the tube in the bores and the two root ribs together with the whole wing flat on a table (0° dihedral).

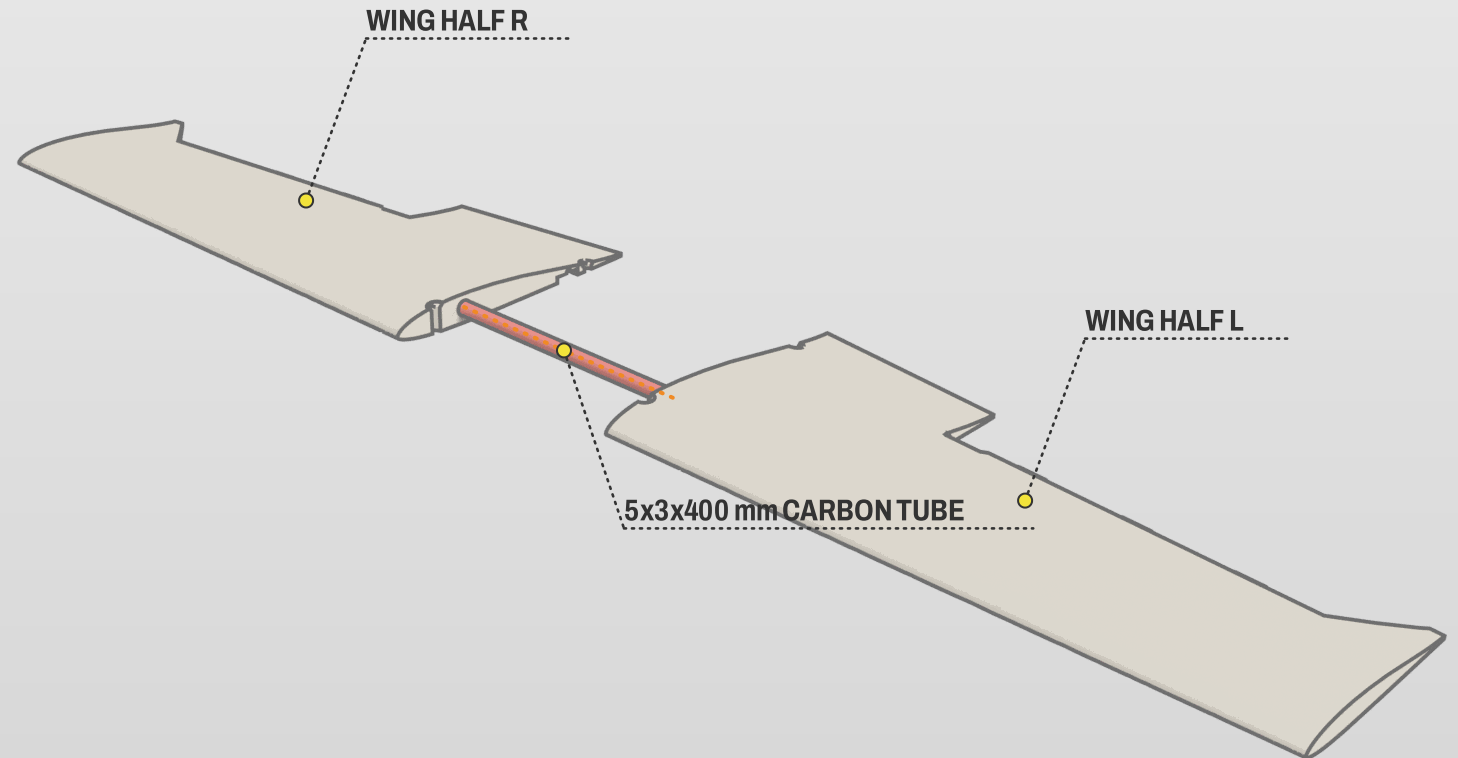


EPOXY

WING ASSEMBLY



Set each aileron in place: its rounded nose sits in the cove along the wing's hinge face and the wing's three knuckles enter the pockets in the nose. Push a 132 mm length of 1.5 mm steel rod in from the wingtip through the tip, the aileron and the knuckles. Wick thin CA into the aileron's four glue holes only, then plug the tip hole. The aileron must swing freely.

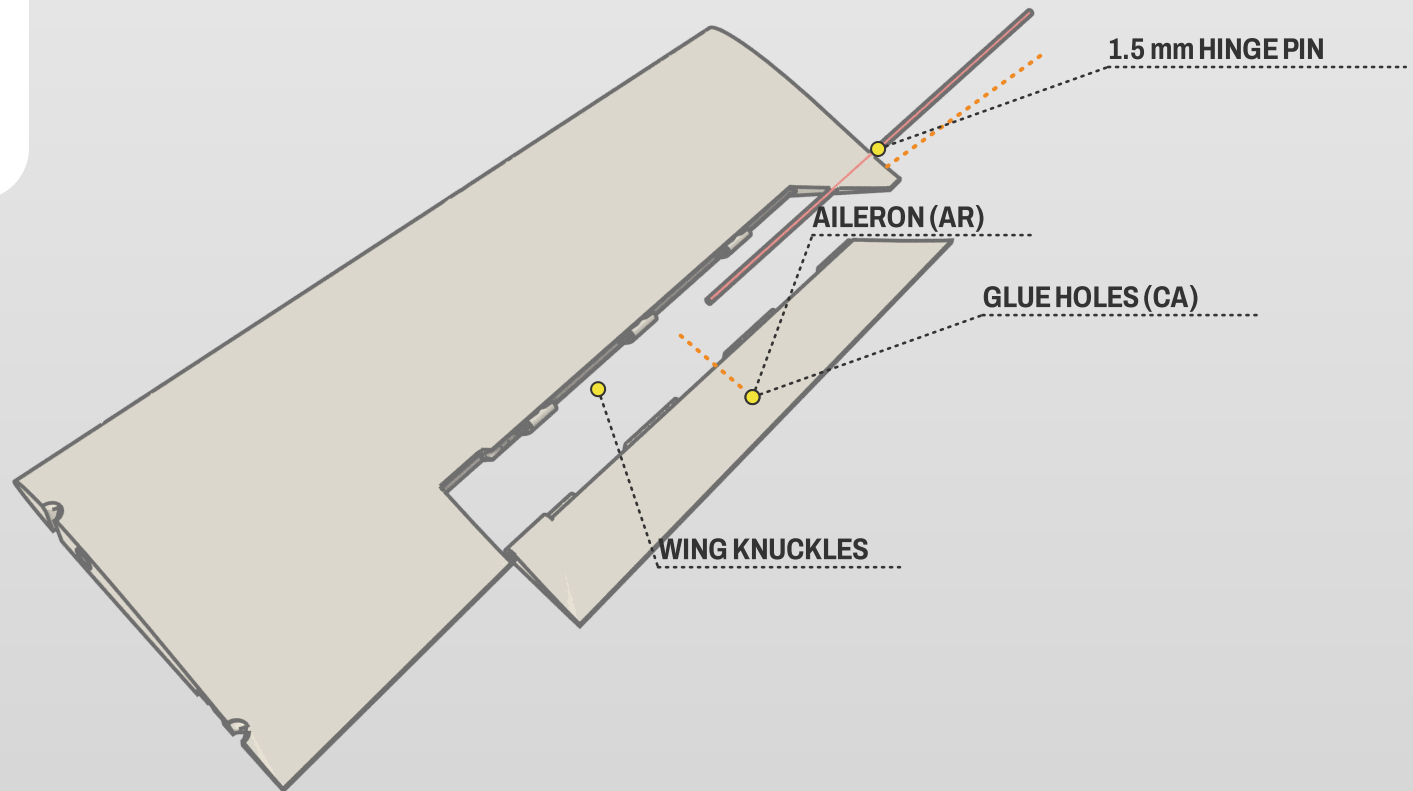


THIN CA

WING ASSEMBLY



Bend a 12 mm horn down at one end of each 2.0 mm rod with a 5.5 mm pin outboard at its tip, and file a 0.3 mm flat on the last 9 mm of the straight end, opposite the horn. Push it in from the root face until the flat enters the D-bore of the aileron's root knuckle; epoxy the end and hold the aileron 3° trailing edge up while it cures.

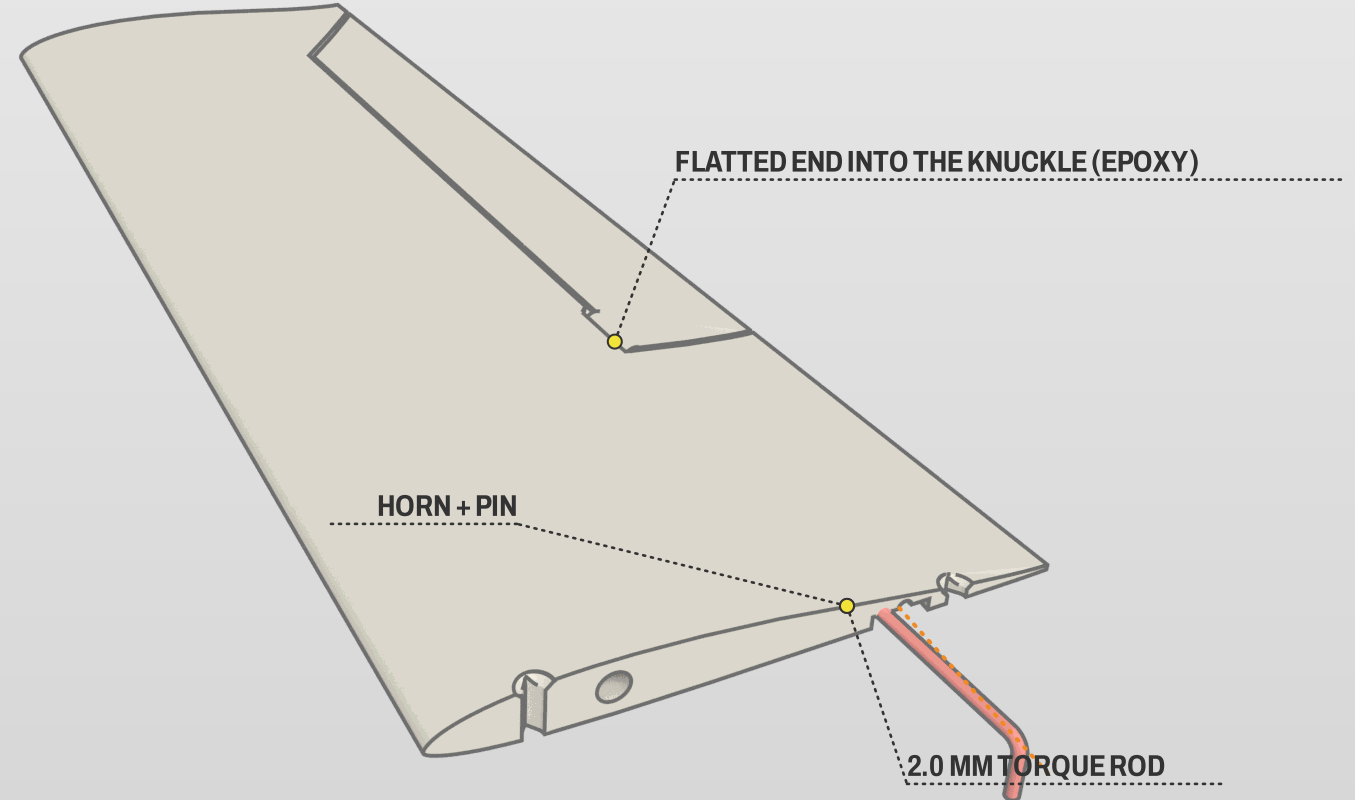


EPOXY

TAIL MODULE



Press a 10 mm brass bushing into each side boss of F3. Epoxy a 2.5 mm steel shaft 35 mm into each tail panel's root bore. From the open front of F3, push each shaft through its bushing and fit the wheel-collar horn with its 8 mm brass plate standing along the panel's normal (not pointing forward), 0.5 mm end play, set screw on a filed flat.

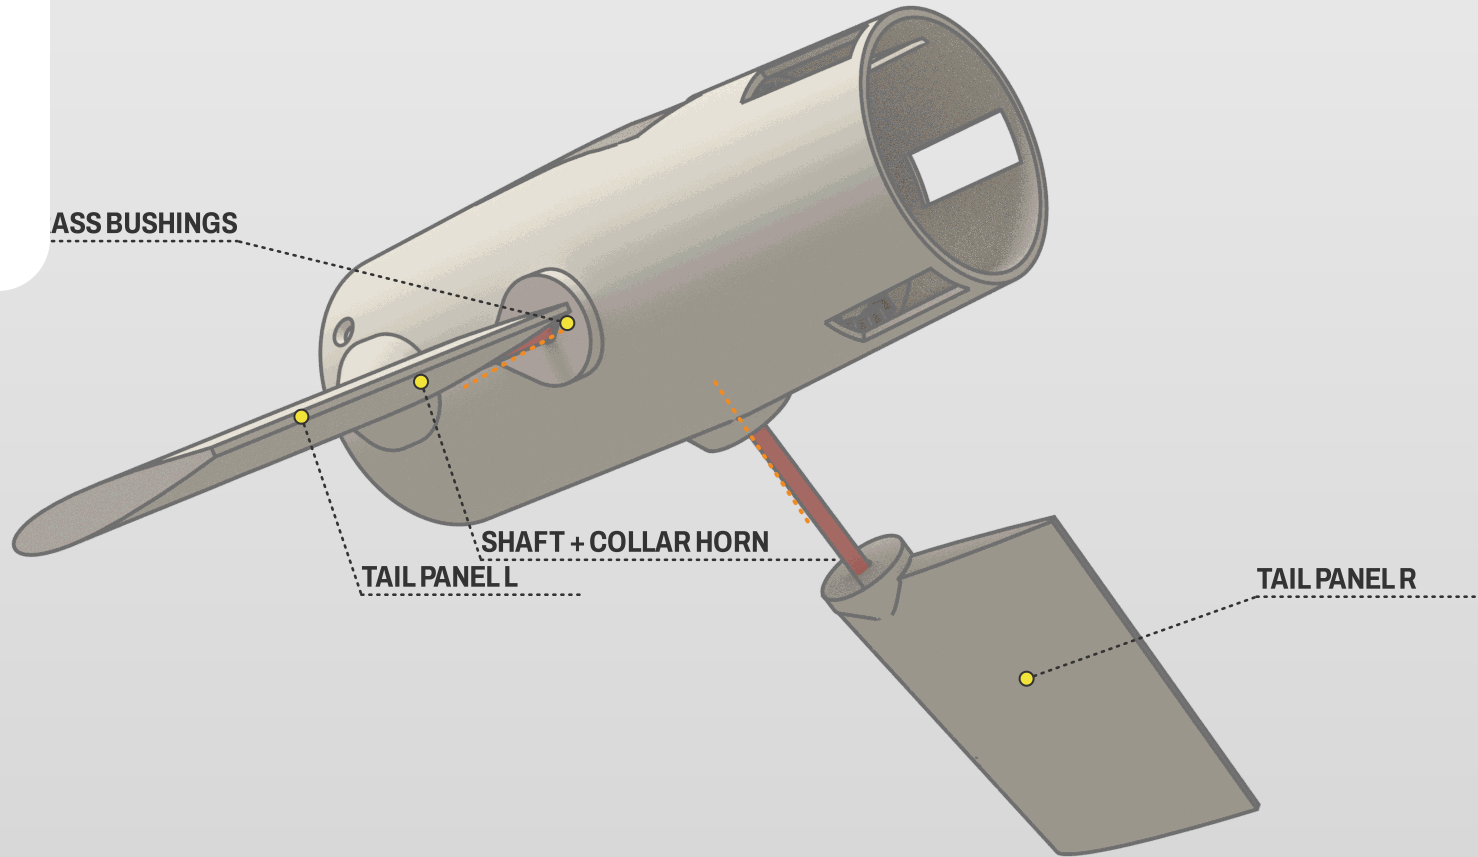


EPOXY

TAIL MODULE



Bond the M1 plate into the conical seat at the rear of F3 with high-temperature epoxy, its edge notches lined up with the cooling windows; it is the motor bulkhead. Then screw the motor to it with its 4 × M3 from inside the module, through the 28 mm opening. Do this before the tail-panel shafts and servos go in. Fit the spinner backplate, the prop (APC 5 × 7.5E fixed thin-electric pusher (LP05075E, 5 mm bore, hub 12.7 × 7.1 mm, 30,000 rpm rating), rpm-governed at 29,500) and the thin M5 nut.

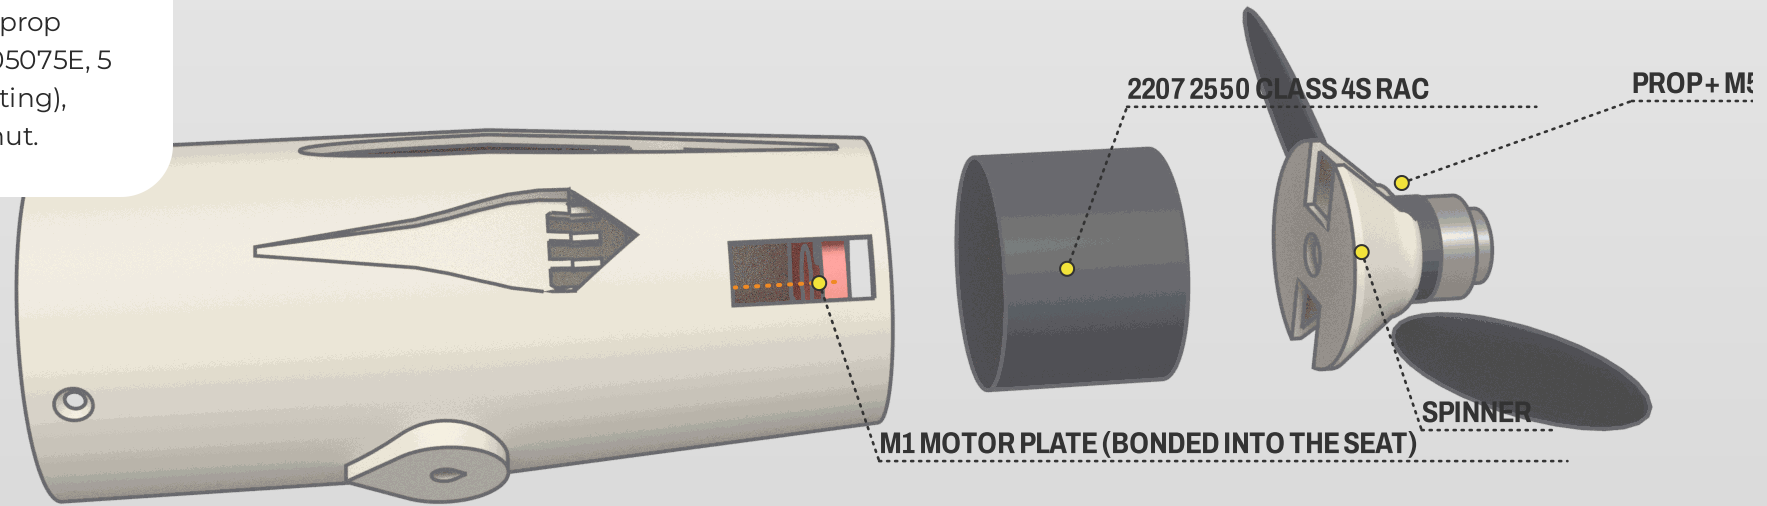


EPOXY

TAIL MODULE



Stand both ES9052MD servos through the cut-outs in the F3 floor on foam tape on the bottom skin, a strap over them, output at the aft end, leads along the side walls. One-sided 15T arm pointing outboard; file a 0.3 mm flat on the inboard end of each 2.5 mm stabilator shaft and epoxy the printed horn (THR/THL) on it, arm along the panel's normal. Drill the servo arm's 6.7 mm hole to 1.3 mm. 1.2 mm Z-bend pushrod: Z-bend in the arm, 90° L-bend at the horn end pushed outboard through the horn's 1.3 mm hole, snap-on keeper on the protruding end (unclip it to take the tail module off). Check both panels move freely through $\pm 20^\circ$.

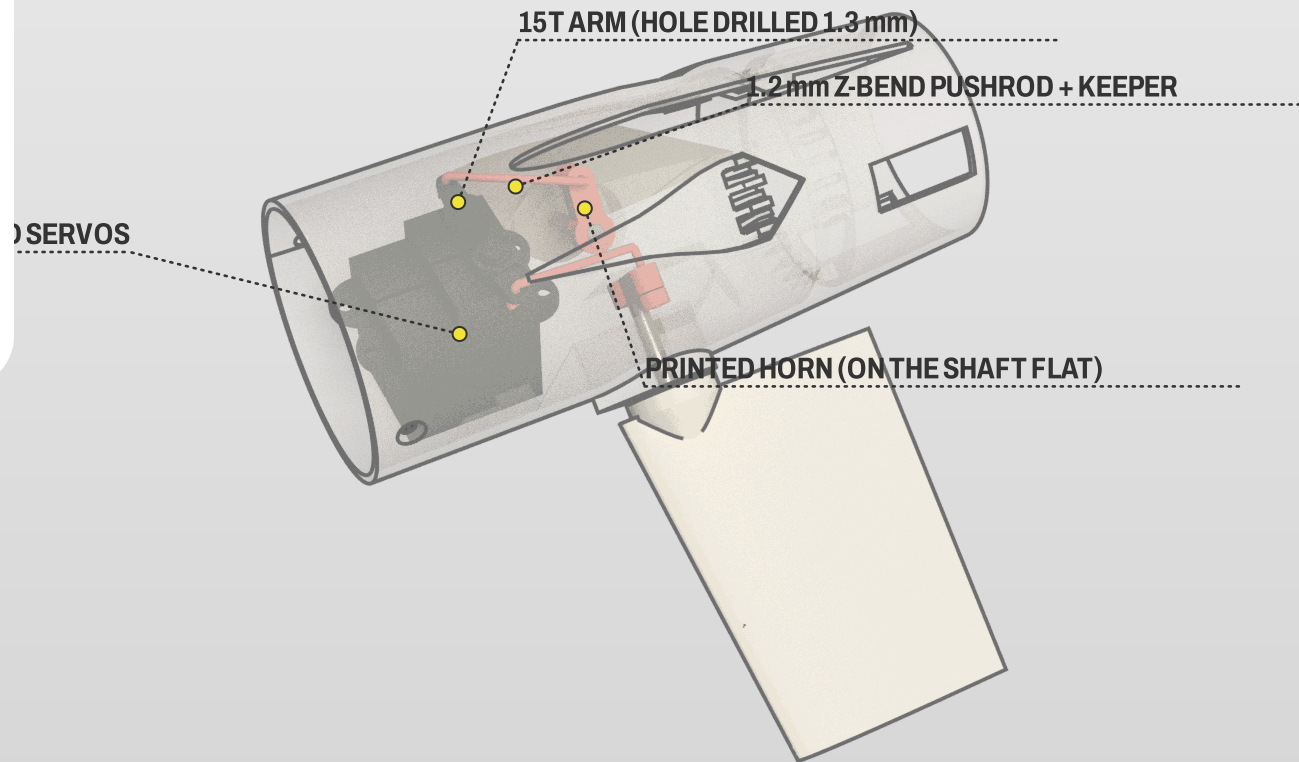


SERVO TAPE

TAIL MODULE



Glue the fin into the top slot of F3 with CA, vertical and square to the wing.

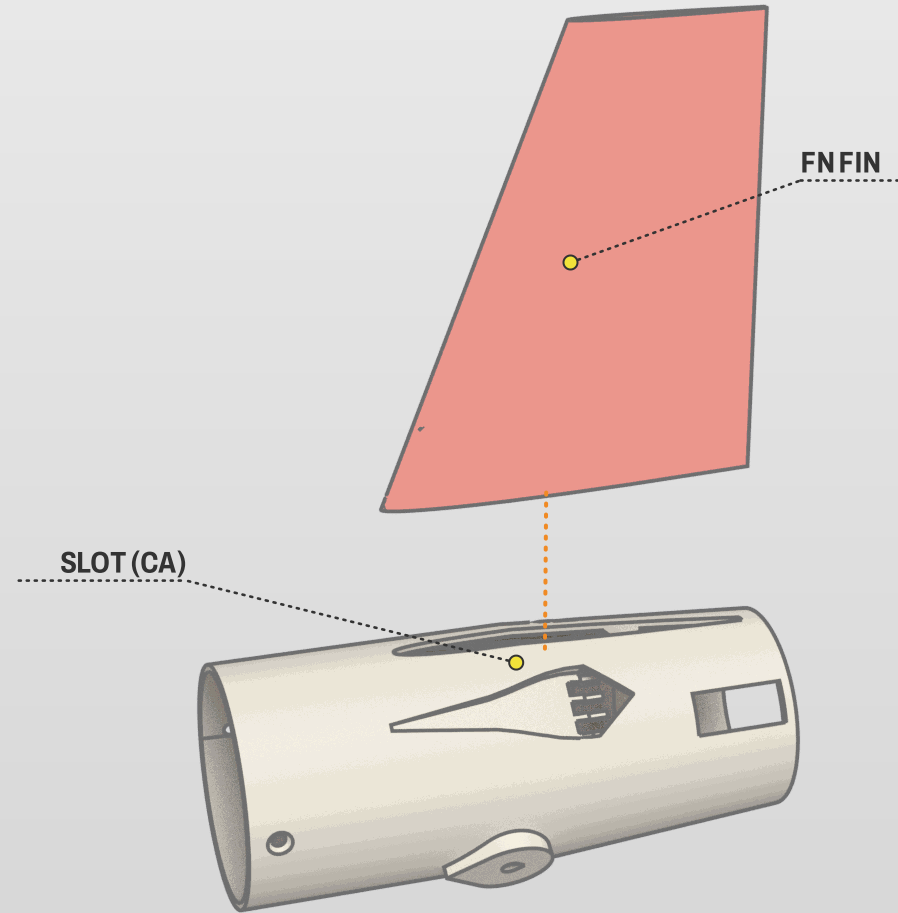


CA GLUE

FUSELAGE ASSEMBLY



Bond the printed GPS carrier (HG) under the rear of the front hatch skin. Foam-tape the TBS M10Q GPS, patch up, to its ceiling, against its rear ledge. The hatch's pointed rear end reaches into F2 and its rear screw goes into F2: take the hatch off before separating F1 and F2. Press the magnets into the hatch lips and the hatch, checking polarity. Leave a slack loop in the GPS lead so the hatch lifts off.

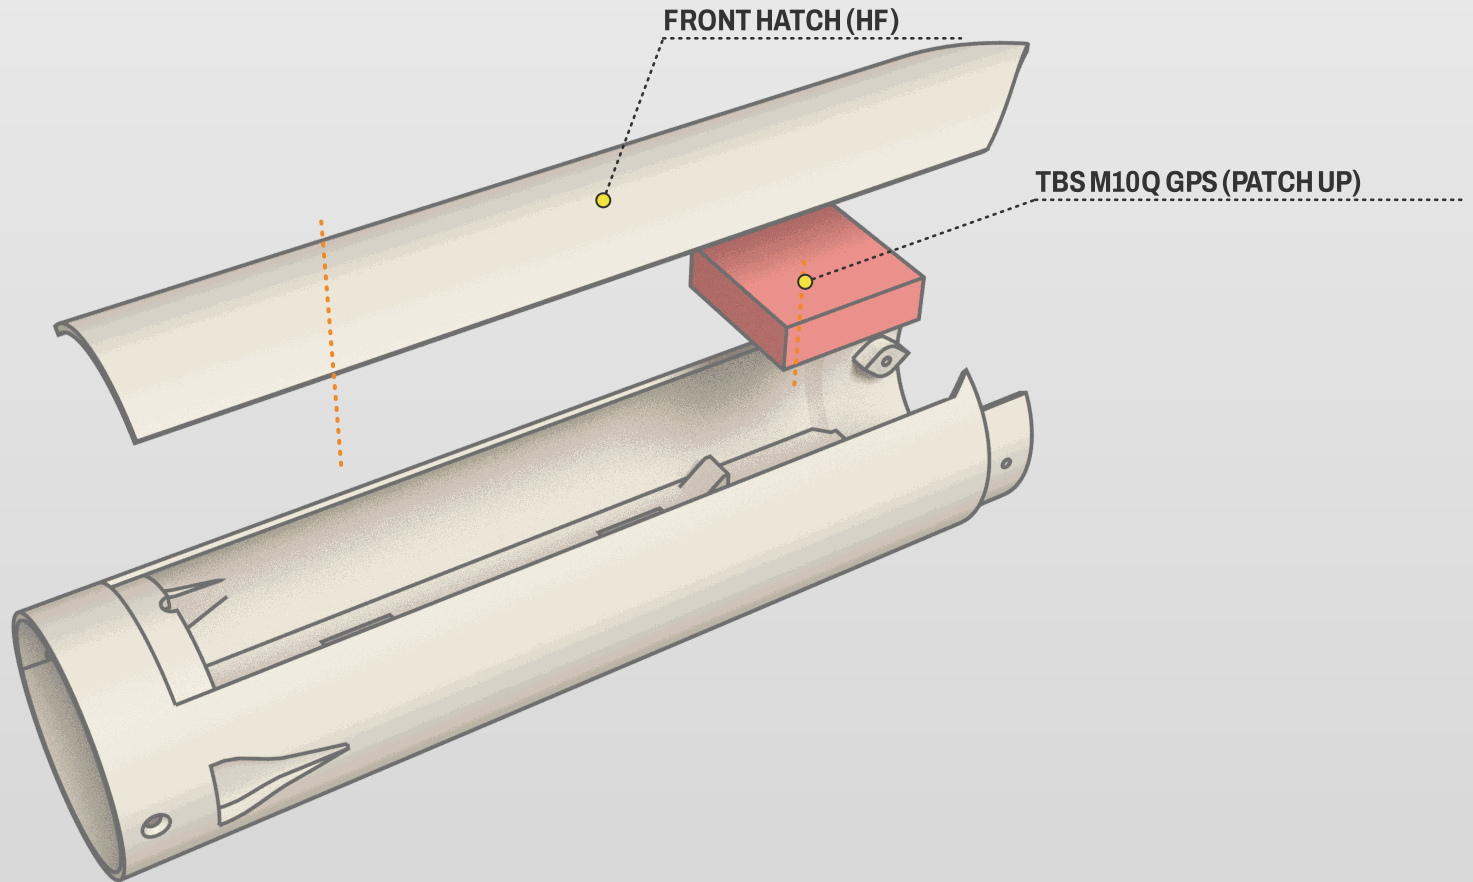


FOAM TAPE

FUSELAGE ASSEMBLY



The pack sits on the F1 floor with a strap through the slots, leads at its rear. Two floor ribs are its rear stop; the XT30 pair lies behind the pack under the GPS and unplugs through the front hatch.

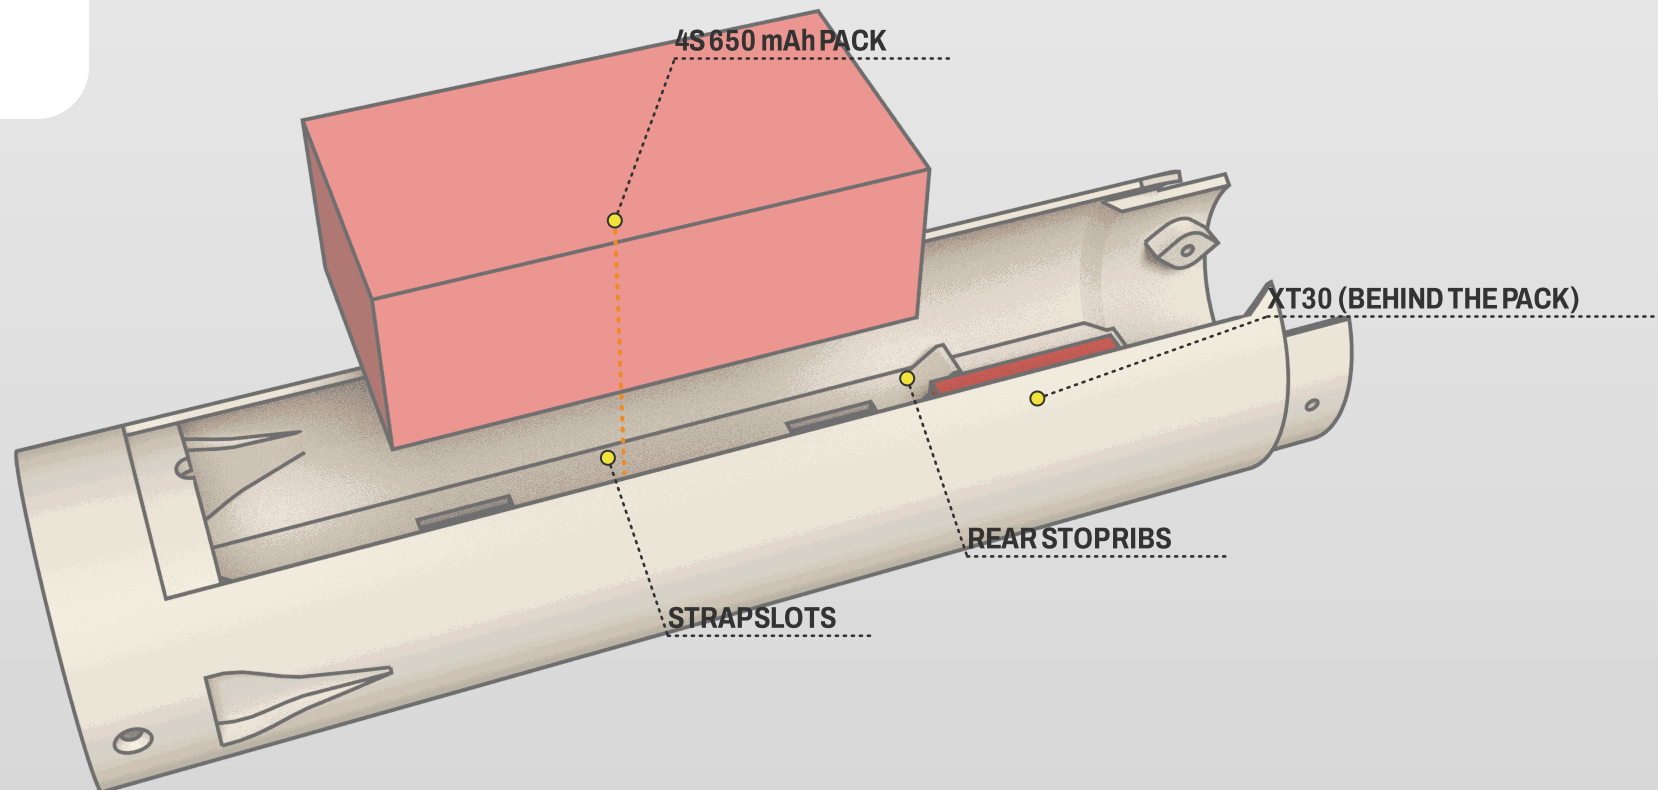


VELCRO STRAP

EQUIPMENT



SpeedyBee F405 WING MINI stack on foam tape and a strap on the wing-bay floor, arrow forward, servo BEC jumper at 6 V; the ESC on top of the stack on a foam pad. Receiver ahead of it, its T-antenna as an L at $x \approx 220$ (one leg up the left wall, one across the floor). Aileron servo aft of the stack, output at the aft end.

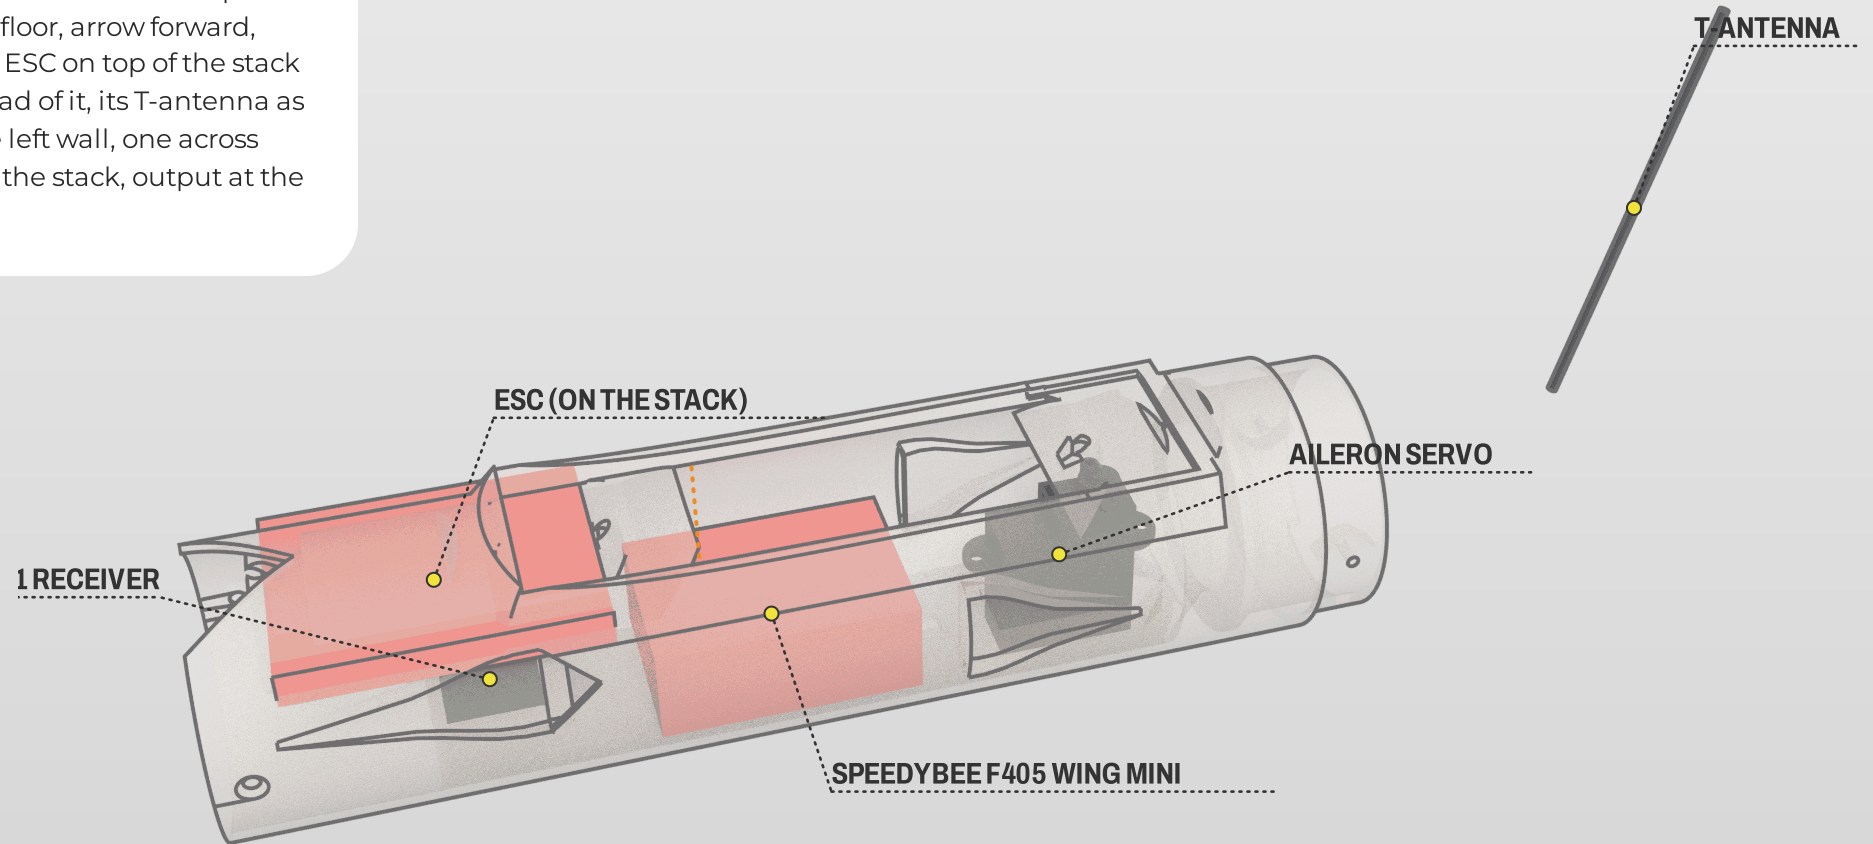


FOAM TAPE

EQUIPMENT




ES9052MD aileron servo standing through the wing-bay floor on foam tape; two-sided 15T arm. Each torque rod has one 90° bend (the horn leg, 6 mm from the centreline); epoxy the printed horn (AHR/AHL) on the leg, 4 mm deep. Drill the arm's 4.3 mm holes to 1.3 mm. Each horn connects to the arm with a 1.2 mm Z-bend pushrod: Z-bend in the arm, 90° L-bend pushed inboard through the horn's 1.3 mm hole, snap-on keeper on the protruding end. Set both ailerons 3° trailing edge up at servo neutral. No play at either end.

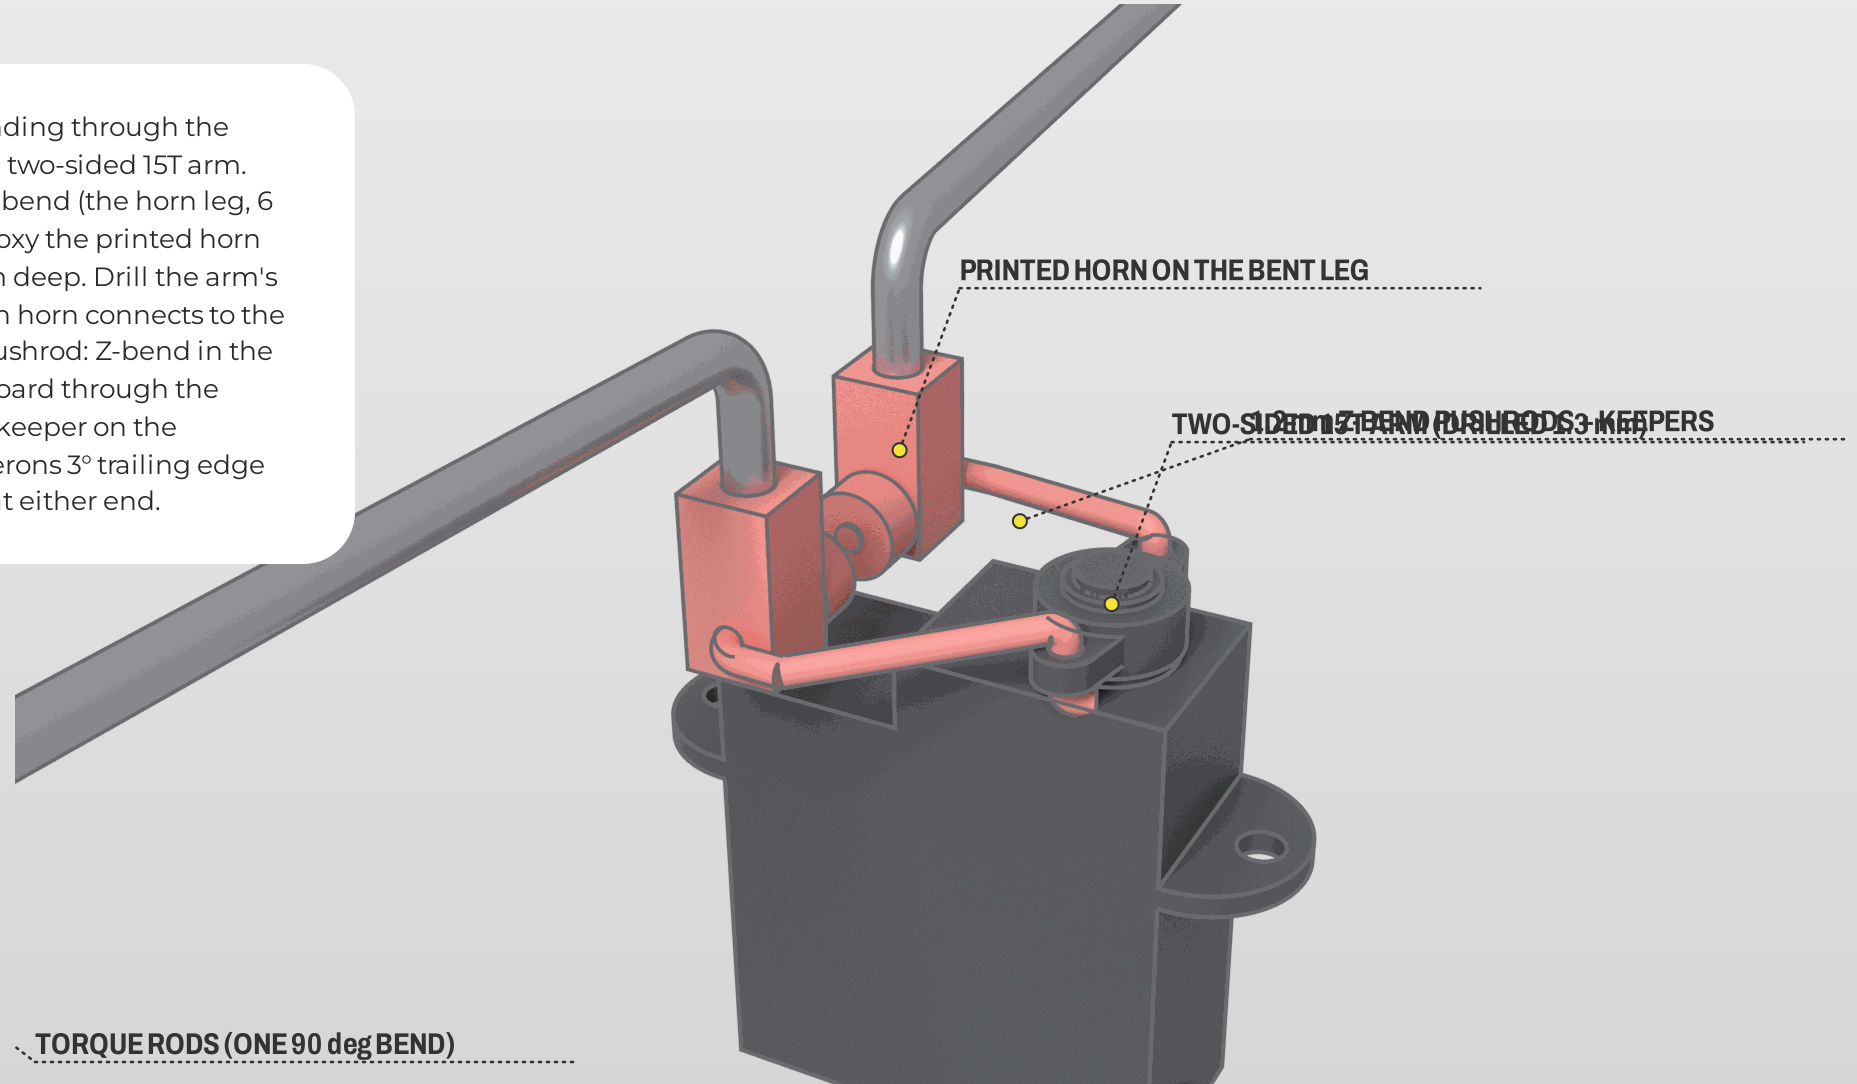

EQUIPMENT



Route the leads as shown: video cable under the battery floor and up through the floor hole ahead of the F1/F2 bulkhead; ESC battery lead up the right side over the FC; motor leads low on the left of the wing bay to the MR30, then through the top of the joint; tail-servo leads along the side walls to plug pairs beside the aileron servo; aileron-servo lead under the floor. Unplug the MR30 and servo plugs before pulling the tail module.

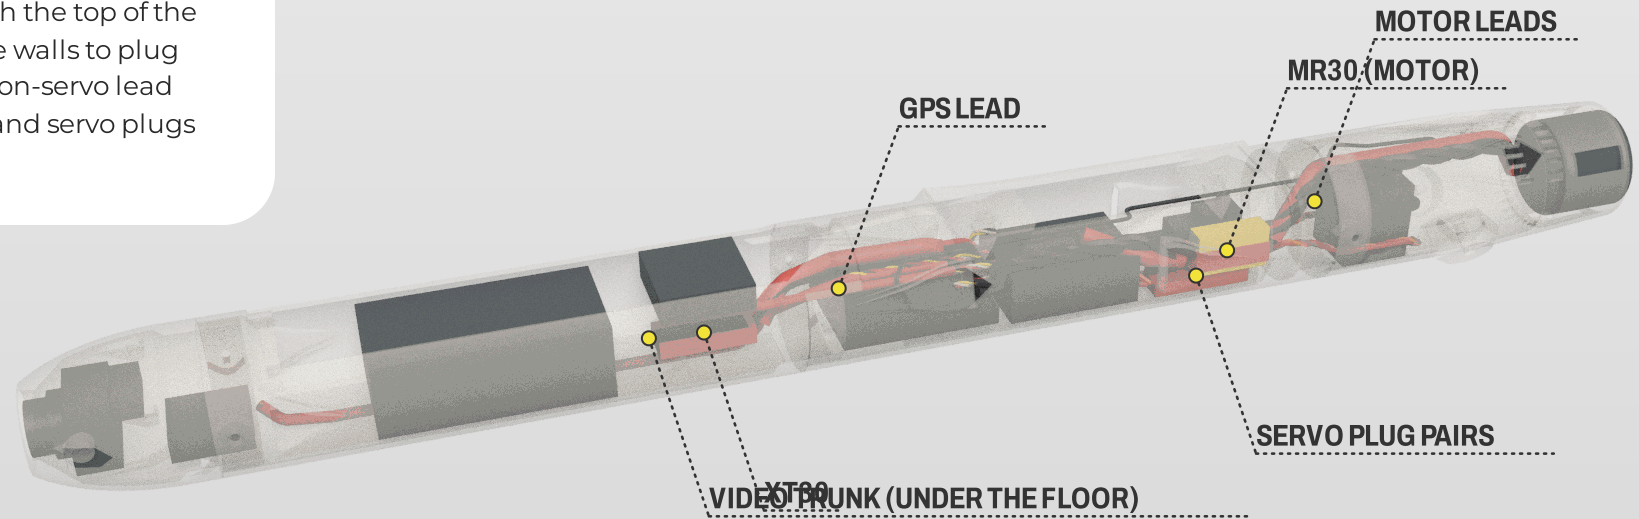


HEAT SHRINK

CAMERA NOSE



Slide the 19 mm camera in from the open rear until the lens reaches the face; 2 × M2 × 8 pan head + 2 × M2 washer (5 mm OD) through the side seats, lens flush, tilt 0–10° up. Fix the VTX to the printed VTX shelf (foam tape + zip tie through its slots), slide the shelf in from the rear onto its two rails and glue it; video antenna in the two clips on the right wall. Plug the one lead at the nose joint. Dome noses: glue the printed dome ring 3 mm into the front of the tube, then fit the clear dome over its lip with canopy glue (no CA).

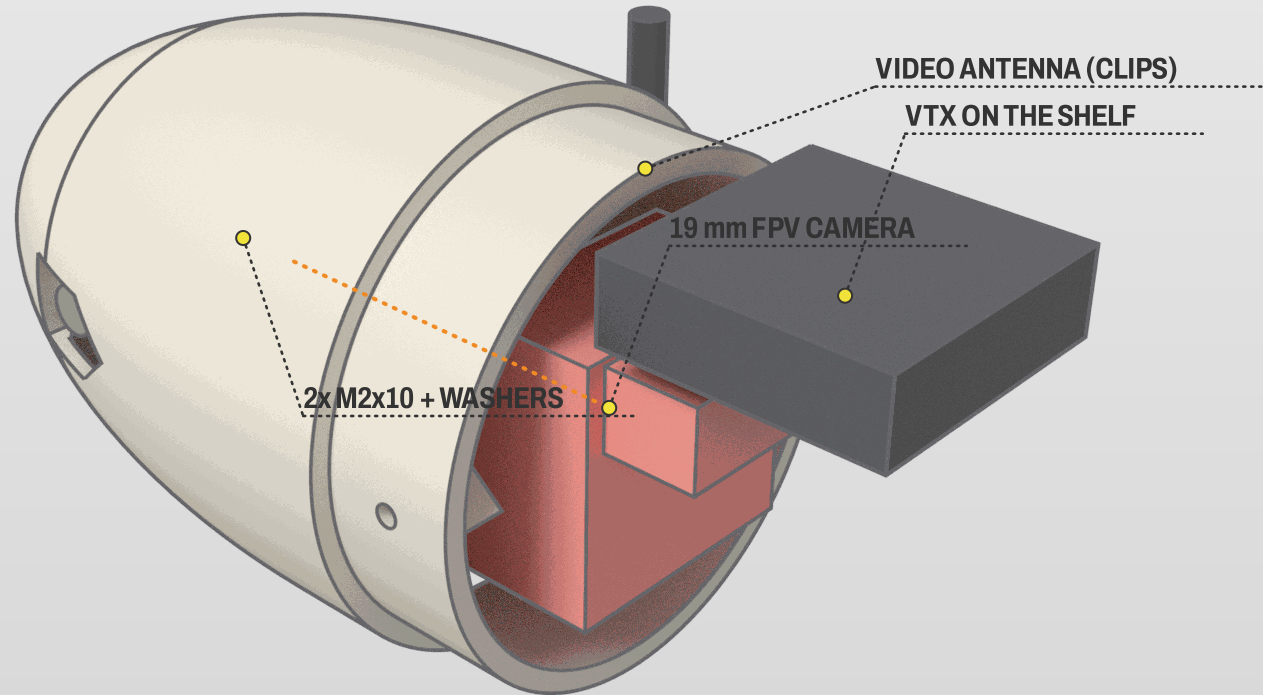


FOAM TAPE

CAMERA NOSE



DJI O4 option: clamp the camera in its mount with 4 × M2 × 5 through the side slots (at most 3.1 mm into the mount). Plug the coax and 3-in-1 lead into the module and slide it edge-first into the duct until it stops; foam strip in the top groove, tape over the rear edge, never over its faces.

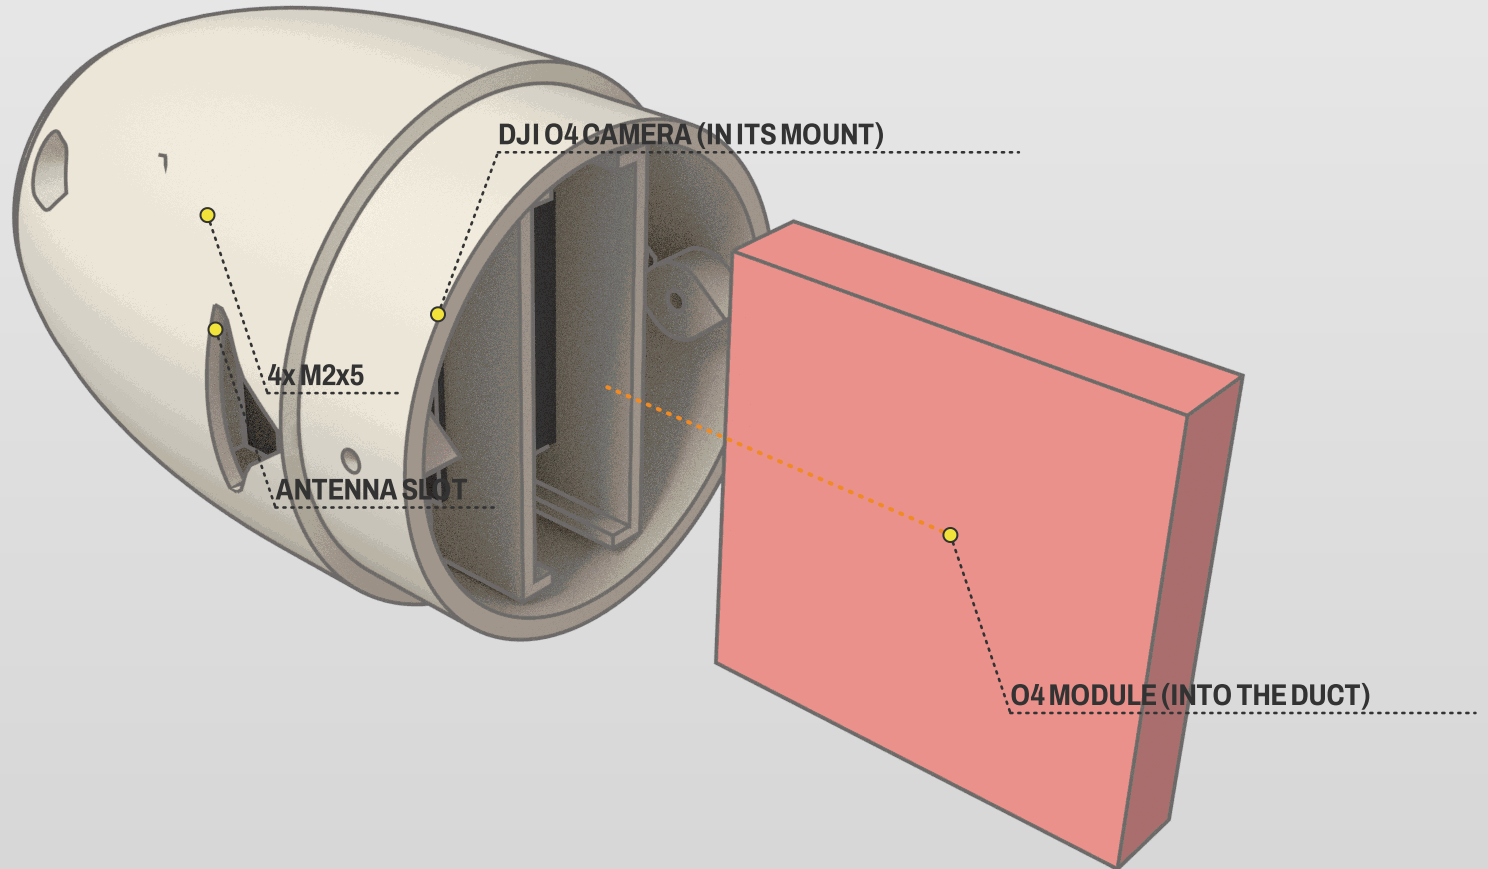


M2 × 5 SCREWS

FINAL ASSEMBLY



Push an M3 nut up into each bolt-bridge pocket in F2. Set the wing on the saddle and bolt it with the nylon screws: Countersunk M3 × 16 at the front, countersunk M3 × 8 at the rear (a 12 mm screw reaches the aileron servo arm); the heads sit flush in the countersinks.

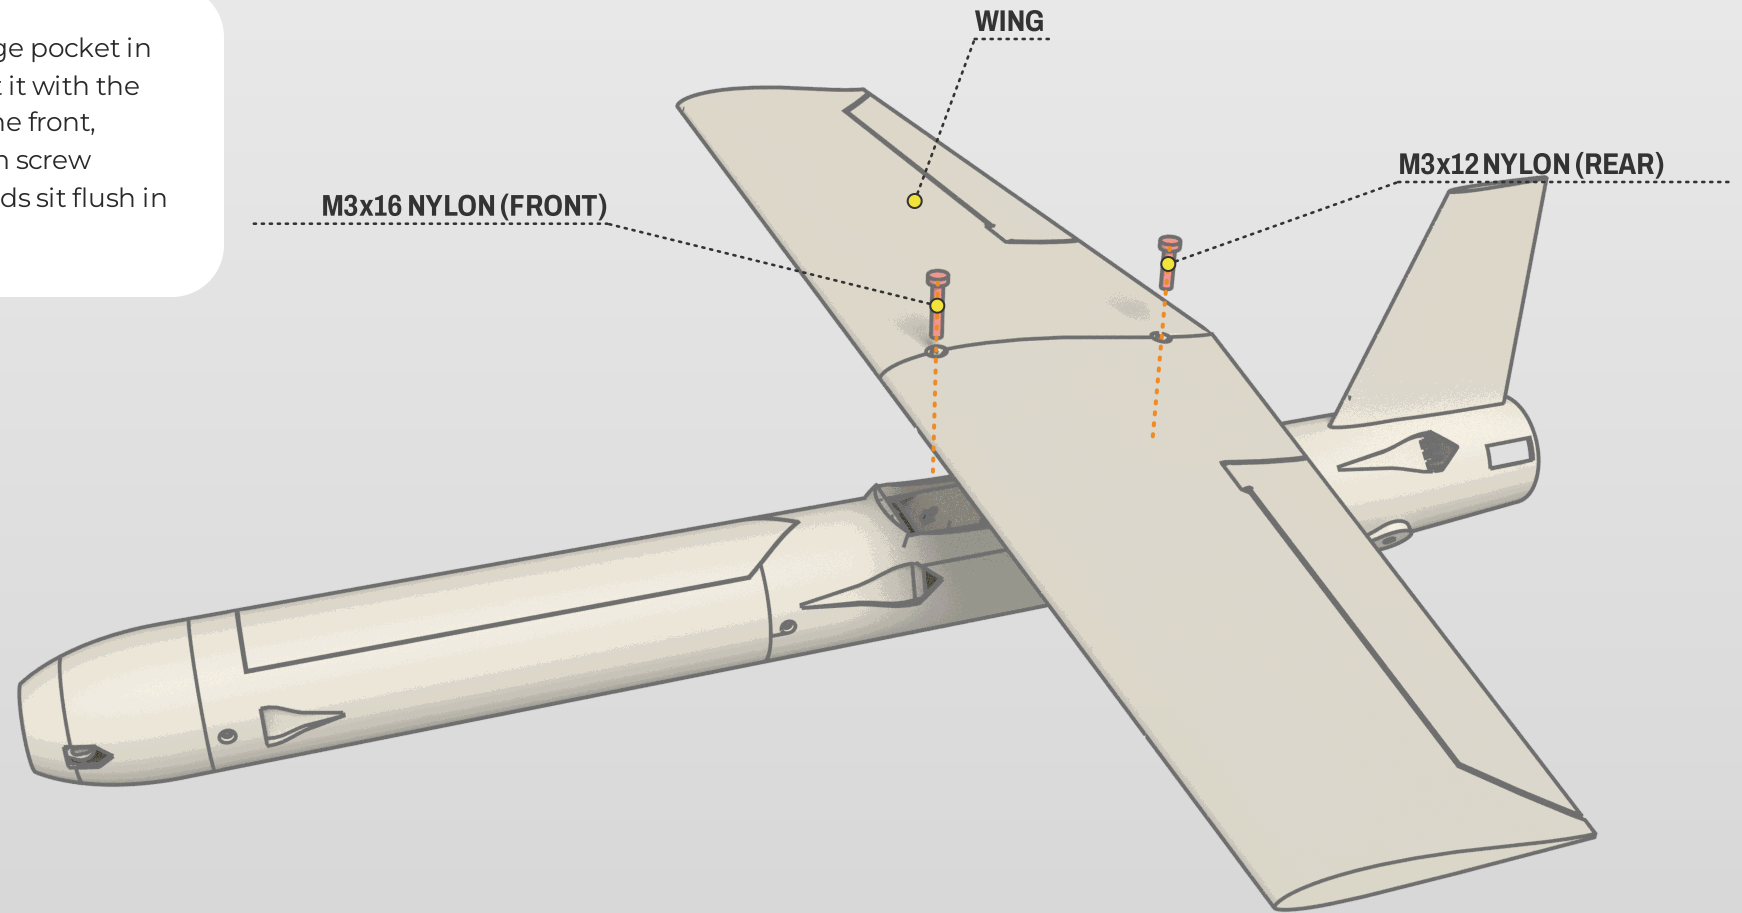

NYLON SCREWS


FINISHING BUILD



Before the first flight: every control surface moves the right way (pitch up: both panel trailing edges up; right roll: right aileron up), throws $\pm 10^\circ$ on the tail panels, about $\pm 10^\circ$ (± 3.5 mm at the trailing edge) on the ailerons, 30 % expo; the prop turns the right way and pushes aft; failsafe set to motor off.

Balance: CG 9 mm behind the wing leading edge at the root (mark it on the wing underside). Slide the battery to trim; for the first flight set the CG 2 mm forward. If a heavy camera needs it, use the nose or tail ballast cup.

Glass skin: one $\pm 45^\circ$ layer of 49 g/m^2 glass on the wing halves and tail panels after printing, then a thin paint finish.

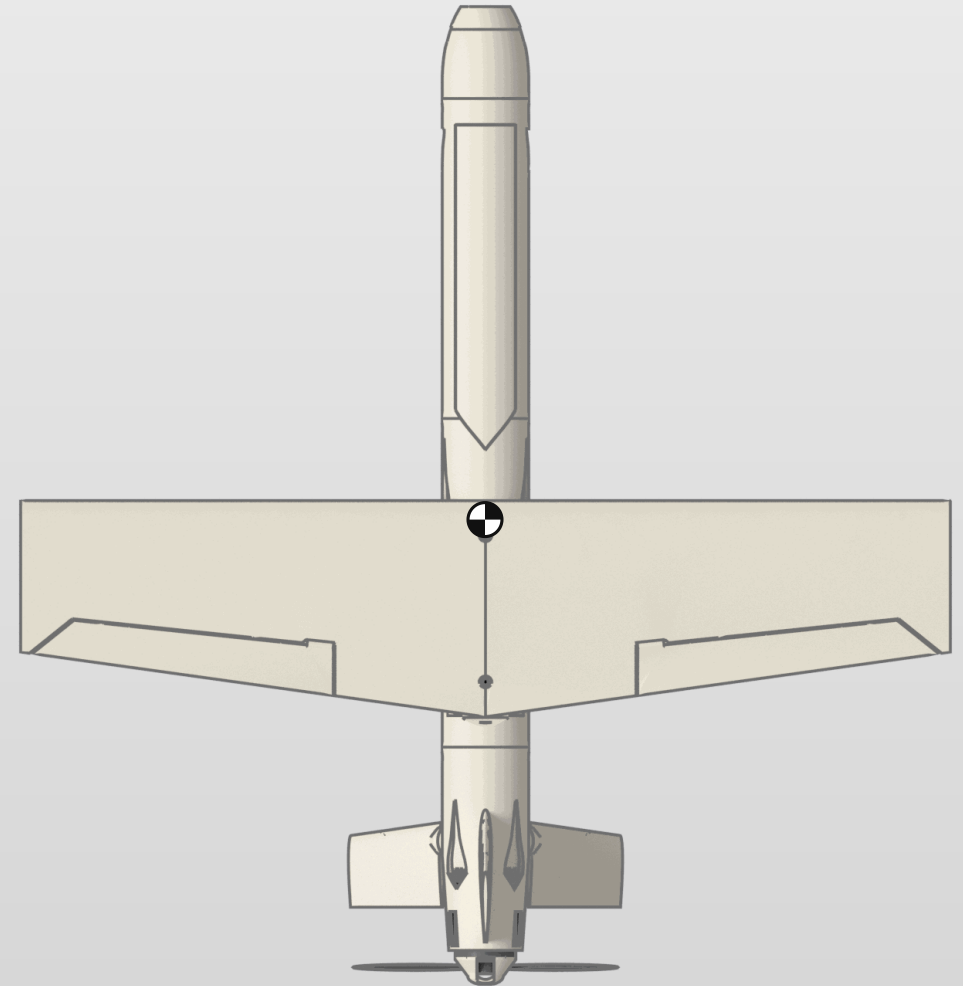


WIRING DIAGRAM



The diagram shows the flight-controller outputs and where each device sits. Signal, power and video leads follow the routes on the wiring page of the assembly guide; the package has this diagram as a separate large page.

PAD	FUNCTION	DEVICE
S1	Throttle (motor ESC)	ESC (DShot300, bidirectional)
S2	Unused	Leave empty (DShot group with S1)
S3	Aileron	Aileron servo (ES9052MD, wing bay)
S4	V-tail left	Left tail-panel servo (ES9052MD, tail module)
S5	V-tail right	Right tail-panel servo (ES9052MD, tail module)

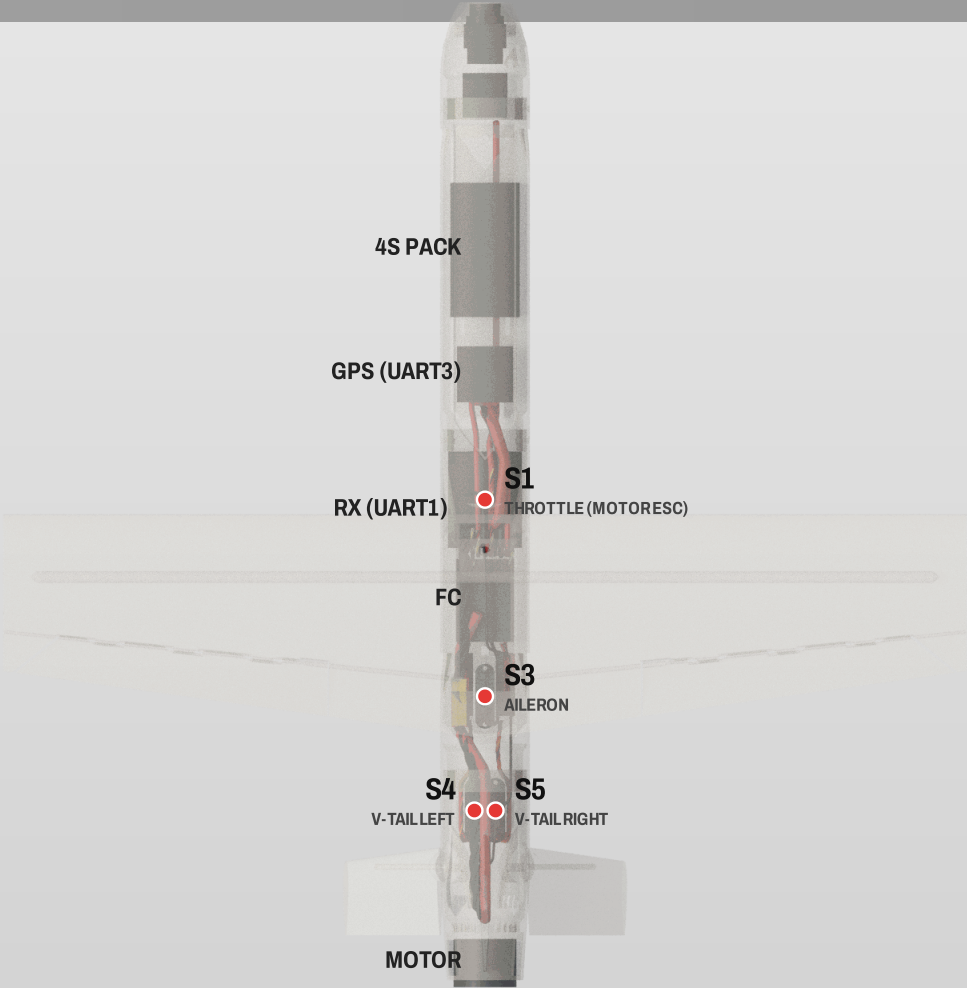

ARDUPILOT CONFIGURATION

Starting ArduPlane configuration for SkyG Speed 90 on the SpeedyBee F405 WING MINI (firmware target SpeedyBeeF405WING, ArduPlane 4.5 or later). Load the .param file in Mission Planner (Config > Full Parameter List > Load from file), then work through the bench checks.

Flight controller: on the wing-bay floor, arrow forward; servo BEC jumper set to 6 V for the ES9052MD servos.

Firmware: ArduPlane 4.5 or later · **Board:** SpeedyBee F405 WING MINI (ArduPilot target: SpeedyBeeF405WING)

The setup document and the starting .param file are in the package (ArduPilot folder). Verify every value on the bench before flight.



FLIGHT TEST AND SPEED STAGES



The speed envelope opens in stages. Fly each stage only after the ground checks and the previous stage pass: thrust-stand run, wing load and twist test, control freeplay ≤ 0.2 mm (≤ 0.05 mm above 45 m/s), aileron hinge stiffness, and the tap test. At each run give short aileron and pitch doublets; any buzz or vibration: throttle to zero, gentle pull-up, land and inspect.

Full procedure, limits and log sheet: the test plan in the Engineering folder.

Stage Vne	STAGE throttle limit	Expected level speed
30 m/s	27 %	24 m/s
35 m/s	32 %	29 m/s
40 m/s	36 %	33 m/s
45 m/s	41 %	38 m/s
50 m/s	45 %	41 m/s
55 m/s	50 %	46 m/s
60 m/s	54 %	49 m/s
65 m/s	59 %	54 m/s
70 m/s	64 %	58 m/s
75 m/s	69 %	62 m/s
80 m/s	70 % (needs the governor)	63 m/s
85 m/s	70 % (needs the governor)	63 m/s
90 m/s	70 % (needs the governor)	63 m/s

SKYG

SKYG SPEED 90

