


WIRING DIAGRAM · SKYG SPEED 180

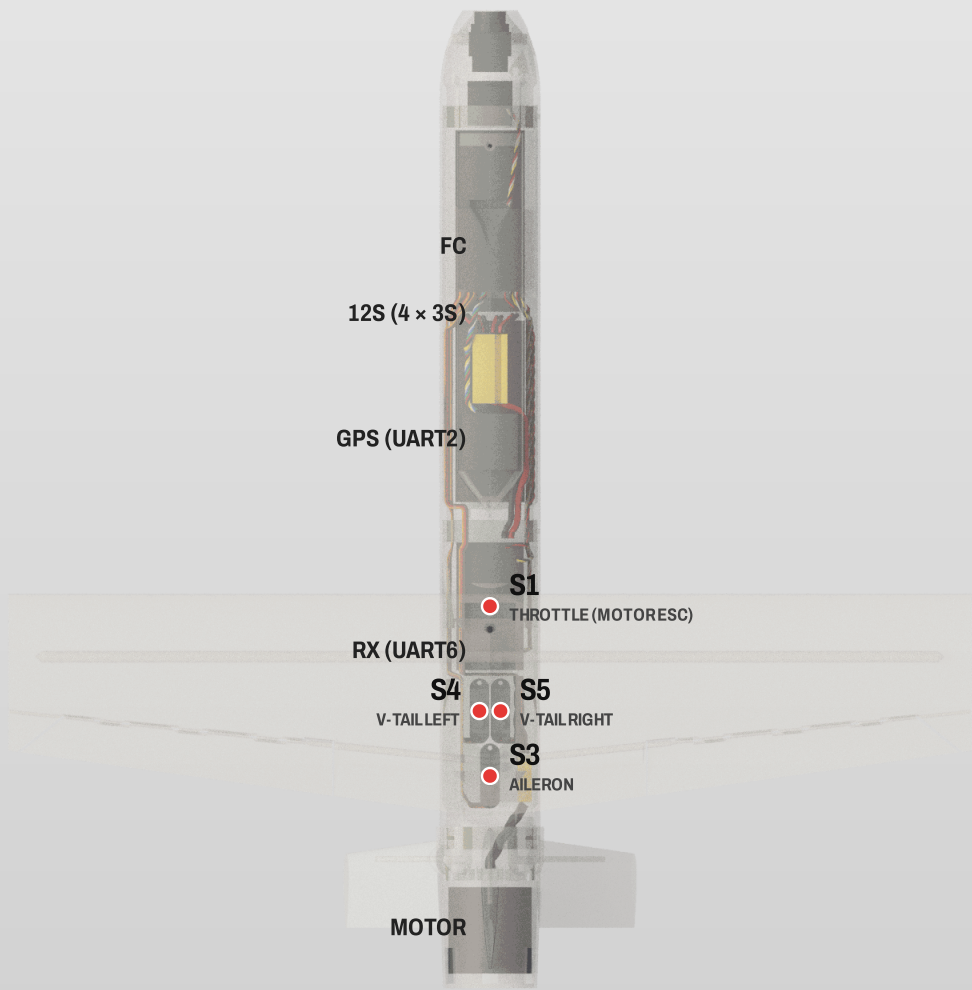

PAD	FUNCTION	DEVICE
S1	Throttle (motor ESC)	Sequire SQESC 14130 ESC (bidirectional DShot300)
S2	Unused	Leave empty (DShot group with S1)
S3	Aileron	Aileron servo (ES9052MD, wing bay)
S4	V-tail left	Left tail-panel servo (ES9052MD, in F2 ahead of the tail joint)
S5	V-tail right	Right tail-panel servo (ES9052MD, in F2 ahead of the tail joint)

PORT	DEVICE	SETTING
UART6 (TX6/RX6) / SERIAL7	RadioMaster RP1 V2 ELRS receiver (BRD_ALT_CONFIG 1)	SERIAL7_PROTOCOL = 23
UART2 (TX2/RX2) / SERIAL3	TBS M10Q GPS (compass on I2C1 DA1/CL1)	SERIAL3_PROTOCOL = 5
UART8 (TX8/RX8) / SERIAL5	DJI O4 Air Unit (O4 noses only)	SERIAL5_PROTOCOL = 42 (O4 noses)
UART4 RX4 / SERIAL6	ESC serial telemetry (fallback rpm source only)	SERIAL6_PROTOCOL = 16 (fallback)