


PART I : Pre-lab Assignment

Modify **ee308new.s** so that the display shows the touch pad entry as seen on the surface of the touch pad, i.e., a decimal number between 1–16. Sample runs will look like:

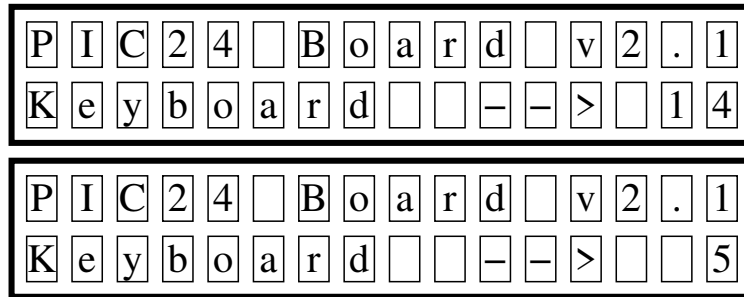

Make sure that pressing “5” after “14” removes the “1” of the 10s digit from the display.

PART II : In-lab Assignment

You will be asked to make further modifications to your code during the laboratory session.

Note:

Upload your modified code as your pre-lab assignment.

□