For Educational Use Only

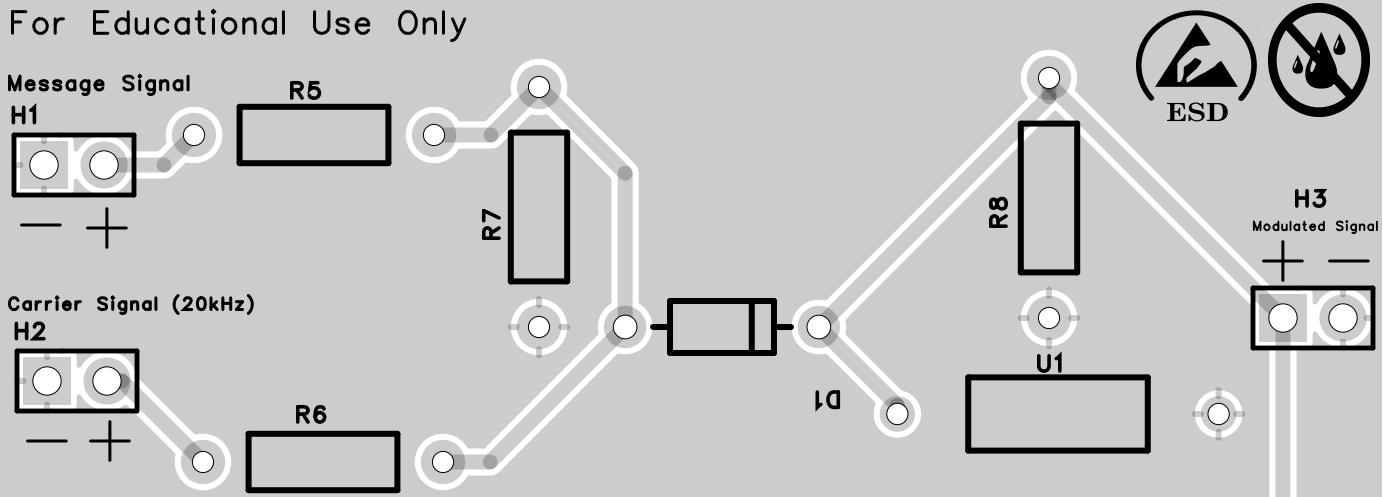

DSB-LC Modulation

$$s(t)=Ac[ka.m(t)]\cos(2\pi fct)$$

s(t):Modulated Signal

m(t):Message Signal

c(t):Carrier Signal-Ac.cos(2πfct)-

m(modulation index)=ka.Am

m(modulation index)=Am/Ac

OPERATING SPECS

fc(Carrier Frequency)=20kHz

fm(Message)≤2kHz
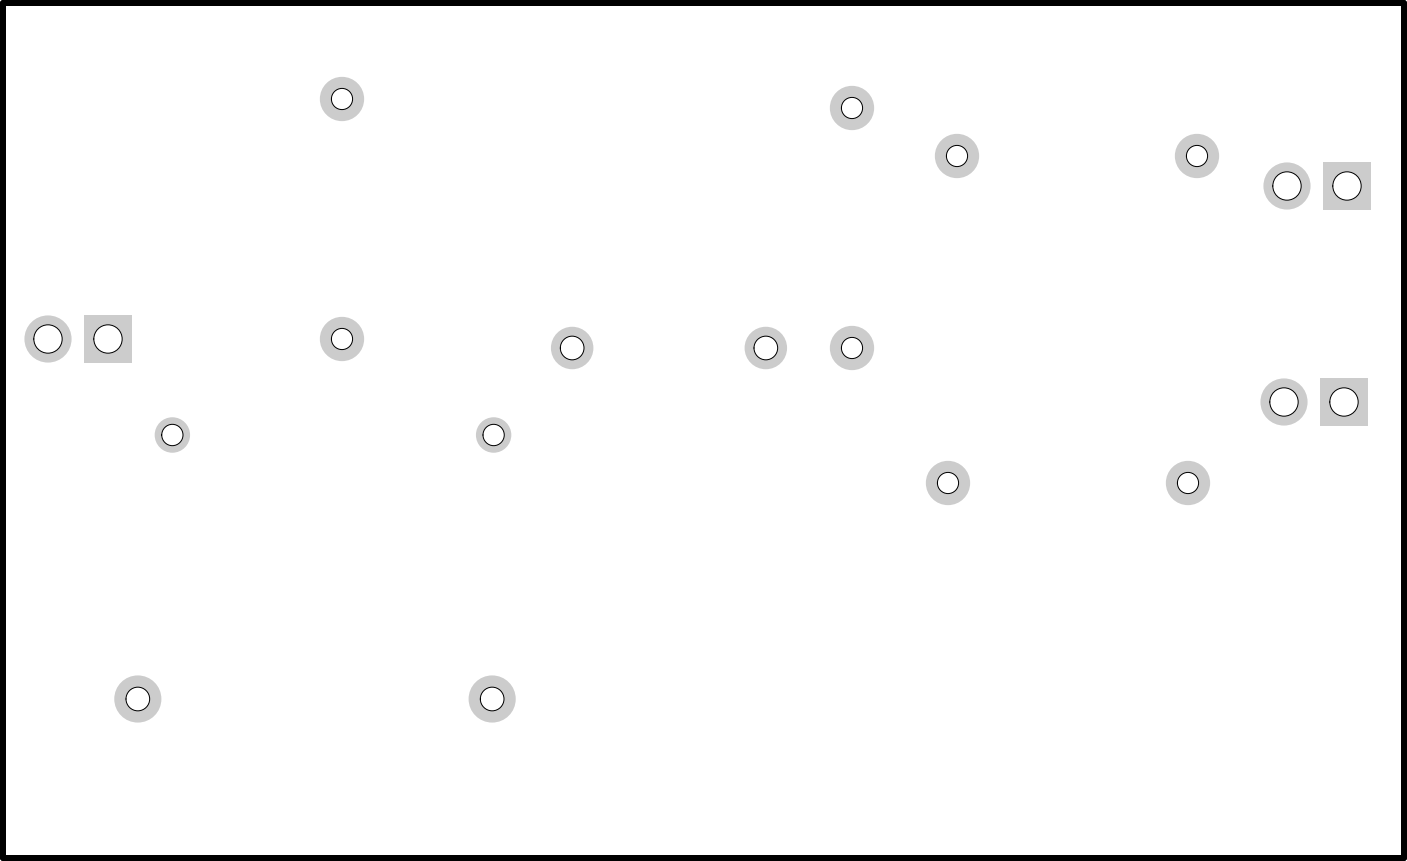
Max Input ≤ 15Vpp