



By using the R5 module
you can adjust the carrier signals's noise
and improve the quality of the modulation

Modulation Part

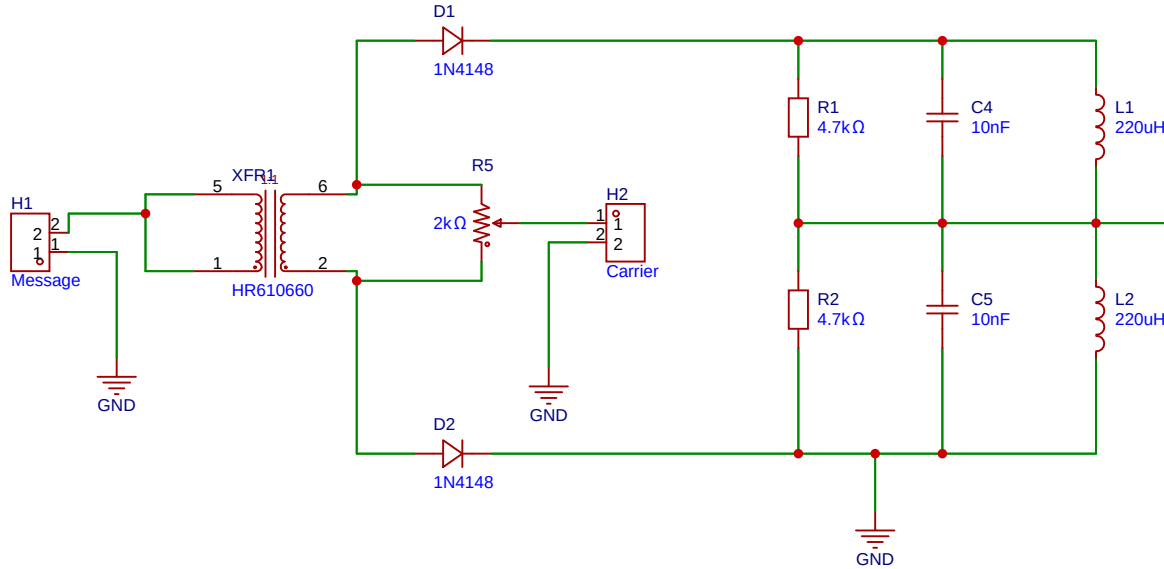

The U2 pin can be used to view the modulated signal
or as a low-pass filter, after which demodulation
can be initiated

Demodulation Part

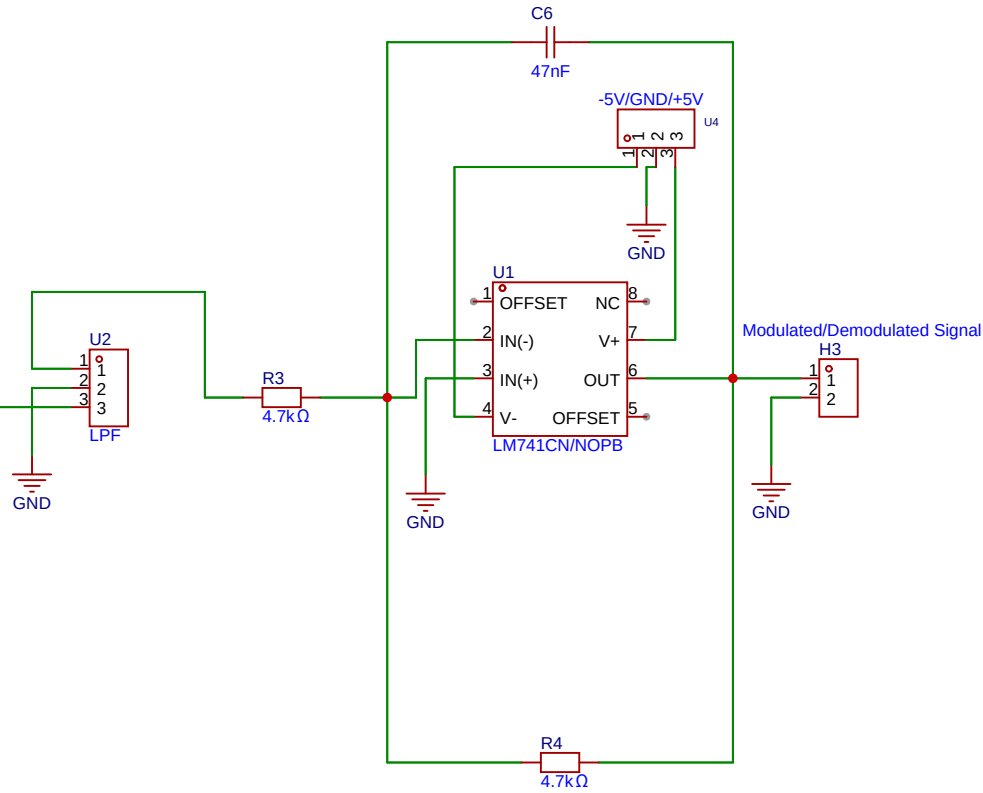

Schematic	Schematic1			Create at	2026-04-17
Board	Board1			Update at	2026-04-25
Drawn	DSB-SC Modulation and Demodulation			Page	P1
Reviewed					
			Version	Size	Page 1 Total 1
EasyEDA			V1.0	A4	EasyEDA.com