

EE568 Project 4

Baris Kuseyri

June 26, 2020

Contents

1	Introduction	2
2	Literature Review	2
2.1	Torque Density	2
2.2	Torque Ripple	2
3	Analytical Calculation & Sizing	2
3.1	Magnetic Loading & Electrical Loading	3
3.2	Specific Machine Constant	3
3.3	Rough Dimensions	3
3.4	Winding Configurations	4
3.5	Machine Parameters	4
3.6	Material selection	5
3.7	Electrical circuit parameter	5
4	FEA Modelling	5
5	Comparison & Discussion	5
6	Conclusion	5
7	Draft	5

1 Introduction

DW stator topologies are the major stator type used in PMSMs. This is due to their near sinusoidal MMF which yields a high main harmonic winding factor and low torque ripple. It was not until very recently that it was shown that the right choice of slot and pole combination for a FSCW stator could yield a high main harmonic winding factor which is essential to having a high average torque [?]

2 Literature Review

analytical modelling of the stator MMF and machine equivalent airgap function are essential to correct calculation of the stator magnetic field and inductances, and subsequently torque and torque ripple. analytical formulae for the stator MMF. [?].

2.1 Torque Density

2.2 Torque Ripple

Cogging torque is one of the torque elements contributing to the torque ripple in the PMSM. Several design factors lead to variation on cogging torque. Here, one such aspect is investigated, that is the amount of stator teeth aligned with poles in the rotor at a given instance. For the corresponding magnetic circuit, permeance is highest when a rotor pole and a stator tooth are aligned. This results with a force that tries to keep the pole steady; hence, emerging a torque counter to the rotor rotation. This is called 'cogging torque'. More of such alignments result with more cogging torque. This description leads to the statement that the value of least common multiple (LCM) of the number of slots Q and number of poles $2p$ is an indicator for the intensity of the cogging torque in a PMSM. LCM of Q and $2p$ is inversely proportional to the cogging torque amplitude.

FSCW stator topologies are characterized by their slots per pole per phase ratio, denoted S_{pp} [?].

3 Analytical Calculation & Sizing

As mentioned in the proposal the machine rating are,

Power [kW]	Speed [rad/s]	Torque [N·m]
46.9790	282.7433	166.1542

Table 1: Lycoming Operator's Manual IO-360-L2A Operating Conditions

3.1 Magnetic Loading & Electrical Loading

Permitted RMS values for linear current densities \bar{A} , current densities J and peak air-gap flux densities for PMSMs with single-layer field winding, and the corresponding tangential stress σ_{Ftan} are reported as follows: Here,

\bar{A} [kA/m]	\hat{B}_g [T]	J [A/mm ²]	σ_{Ftan} [Pa]
35-65	0.85-1.05	2-4	21000-48000
50	0.95		33876

Table 2: PMSMs with Single-Layer Field Winding

σ_{Ftan} is calculated by

$$\sigma_{Ftan} = \frac{\hat{A}\hat{B}_g}{2} = \frac{\bar{A}\hat{B}_g}{\sqrt{2}} \quad (1)$$

where, $(\hat{\cdot})$ is for peak value and $(\bar{\cdot})$ is for RMS value of the parameter. Therefore, suitable magnetic and electric loading are chosen as

3.2 Specific Machine Constant

$$\begin{aligned} C &= \frac{\pi^2}{\sqrt{2}} k_w \bar{A} \hat{B}_g = \frac{\pi^2}{2} k_w \hat{A} \hat{B}_g \\ &= \frac{\pi^2}{\sqrt{2}} k_w \cdot 50 \cdot 0.95 \\ &= 331496.1 \cdot k_w [W/m^3] \end{aligned}$$

where, k_w is the winding factor.

3.3 Rough Dimensions

Rotor Volume V_r in PMSMs can be calculated in a similar manner with asynchronous machines

$$\begin{aligned} T &= \sigma_{Ftan} r_r (2\pi r_r l') \\ &= \sigma_{Ftan} V_r \end{aligned}$$

$$\begin{aligned} V_r &= \pi \frac{D_r^2}{2} l' = \frac{T}{2\sigma_{Ftan}} \\ &= \frac{166.1542}{2 \cdot 33876} = 0.0025 [m^3] \end{aligned}$$

Air-gap Clearance in PMSMs can be calculated in a similar manner with asynchronous machines

$$\begin{aligned}\delta &= \frac{0.18 + 0.006P^{0.4}}{1000}[m] = \frac{0.18 + 0.006 \cdot 46979^{0.4}}{1000}[m] \\ &= 6.235195394489506e - 04[m] \\ &\approx 0.624[mm]\end{aligned}$$

Equivalent Machine Length to Air-gap Diameter $\chi = \frac{l'}{D_g}$ in synchronous machines with pole-pair number more than 1, i.e. $p > 1$, this ratio is calculated as

$$\chi = \frac{l'}{D_g} \approx \frac{\pi}{4p} \sqrt{p}$$

where, the p stands for number of pole pairs in the machine. χ ratio for different number of pole-pairs p can be seen in Fig. 1.

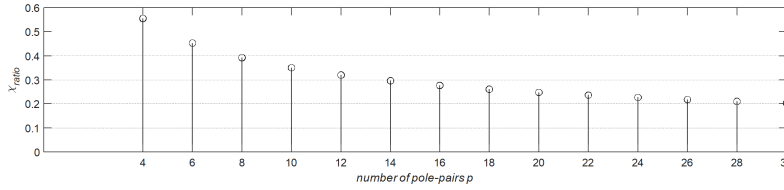


Figure 1: χ ratio for different number of pole-pairs p

airgap clearance	0.7mm
rotor diameter	290mm
axial length	68mm

Table 3: Rough Dimensions

3.4 Winding Configurations

3.5 Machine Parameters

teeth/slot dimensions

back-core thickness

number of slots	
number of coils	
cable size	

Table 4: Winding Configurations

back-core thickness	19.07mm
number of coils	
cable size	

Table 5: Machine Parameters

3.6 Material selection

There are no cost limitations to the EM application. Eclipse Magnetics inform that N35 grade NdFeB magnets have the VH/AH choice, in which the magnet can operate up until the temperatures of $230^{\circ}C$. This is not a requirement for the application, however, implementing N35 PM magnets omits the machine's operable temperature range dependency to the PM magnet demagnetization due to heat. N35 grade NdFeB magnet characteristics are given in Table. 6

B_r [mT]	H_c [kA/m]	Max. Energy BHMax [kJ/m ³]
1170	867	263

Table 6: N35 grade NdFeB PM characteristics

where, B_r is remanence flux density and H_c is coercivity.

3.7 Electrical circuit parameter

4 FEA Modelling

5 Comparison & Discussion

6 Conclusion

7 Draft

1[?] 2[?] 3[?] 4[?] 5[?] 6[?] 7[?] 8[?] 9[?] 10[?] 11[?] 12[?] 13[?] 14[?] 15[?]
16[?] 17[?] 18[?] 19[?] 20[?] 21[?] 22[?] 23[?] 24[?]

back-core thickness	19.07mm
number of coils	
cable size	

Table 7: Material selection