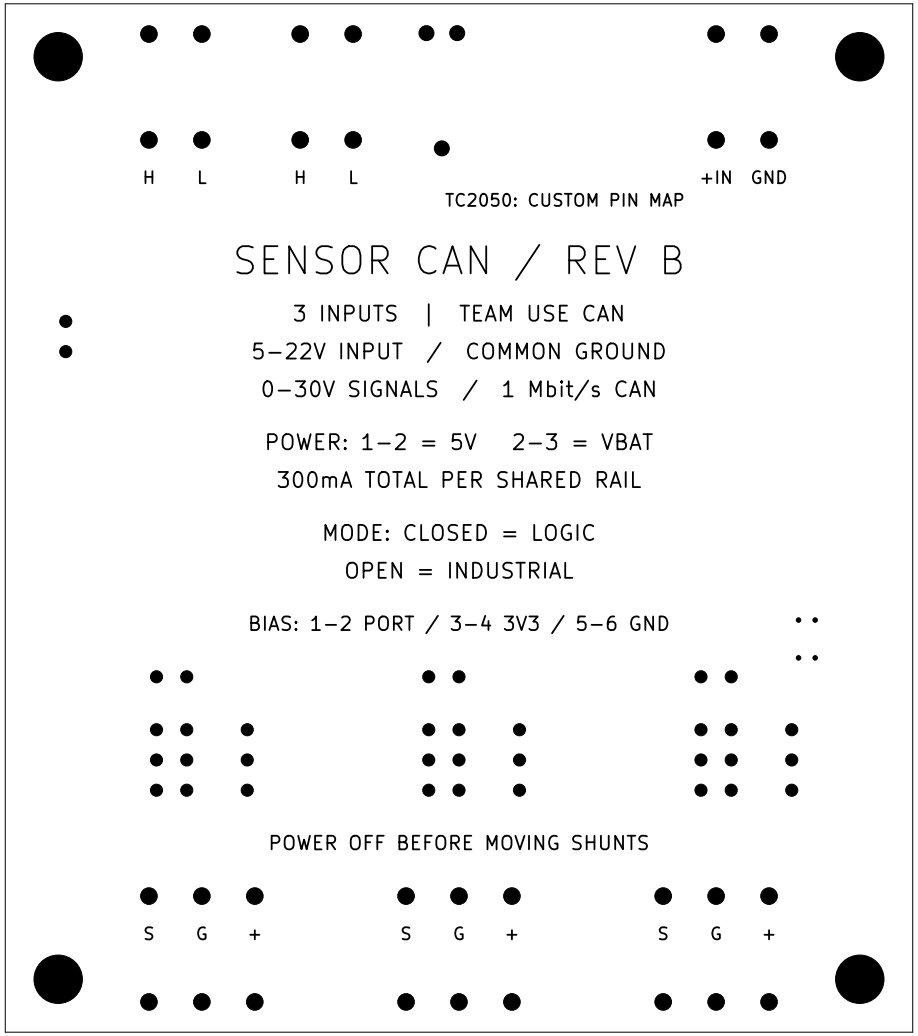

H L H L +IN GND
TC2050: CUSTOM PIN MAP
SENSOR CAN / REV B
3 INPUTS | TEAM USE CAN
5–22V INPUT / COMMON GROUND
0–30V SIGNALS / 1 Mbit/s CAN
POWER: 1–2 = 5V 2–3 = VBAT
300mA TOTAL PER SHARED RAIL
MODE: CLOSED = LOGIC
OPEN = INDUSTRIAL
BIAS: 1–2 PORT / 3–4 3V3 / 5–6 GND
POWER OFF BEFORE MOVING SHUNTS
S G + S G + S G +