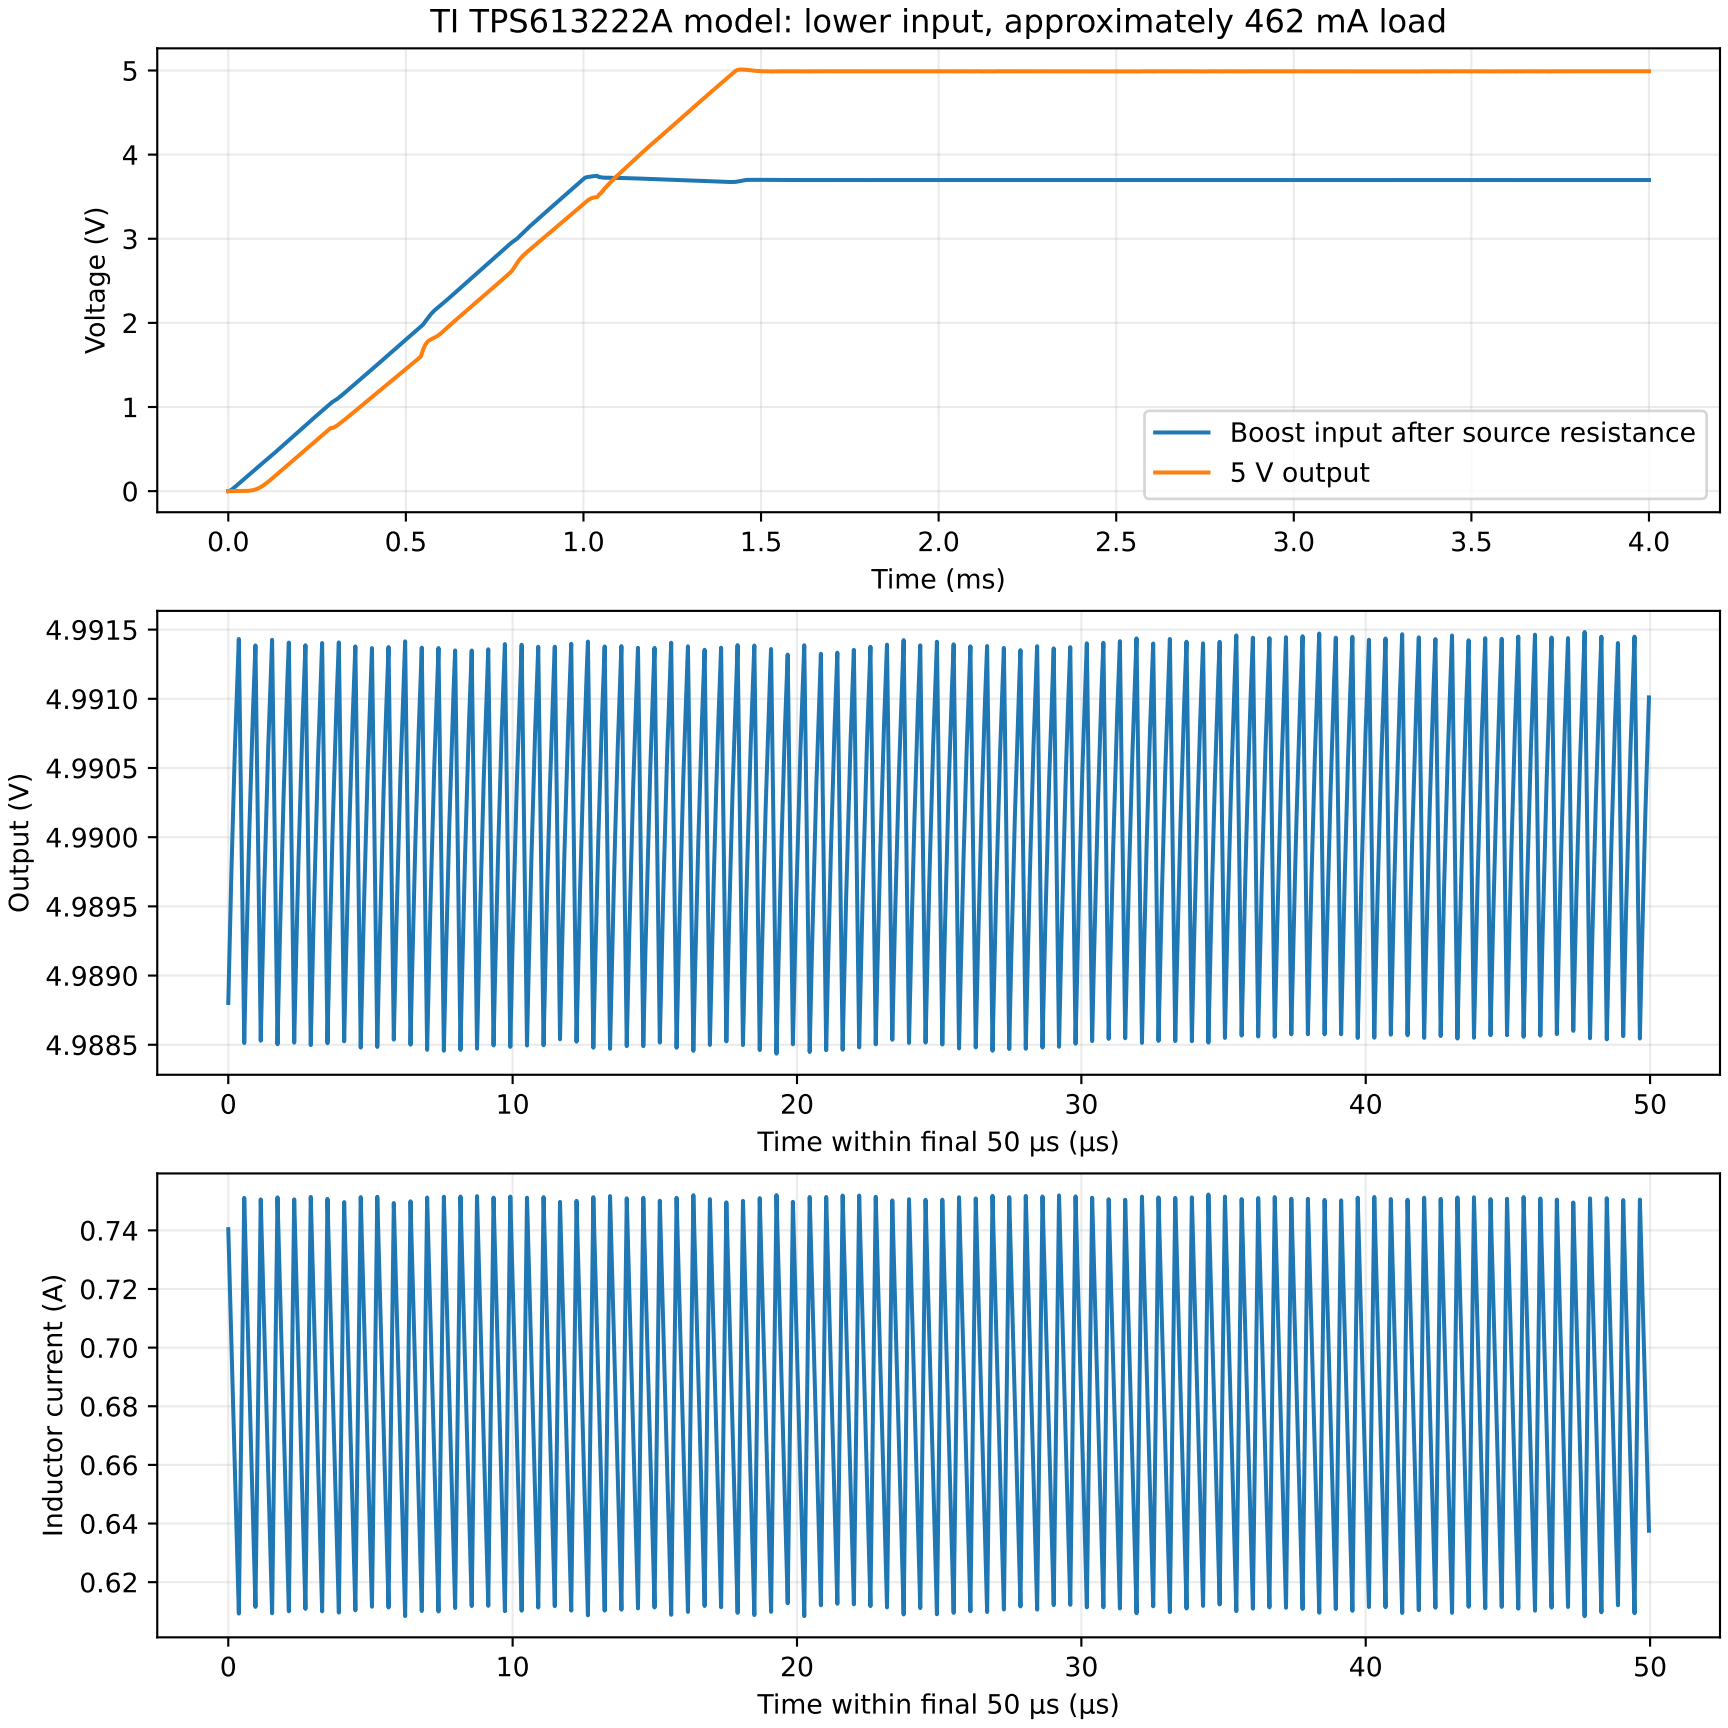
TI TPS613222A model: lower input, approximately 462 mA load
Voltage (V)
Time (ms)
Boost input after source resistance
5 V output
Output (V)
Time within final 50 µs (µs)
Inductor current (A)
Time within final 50 µs (µs)