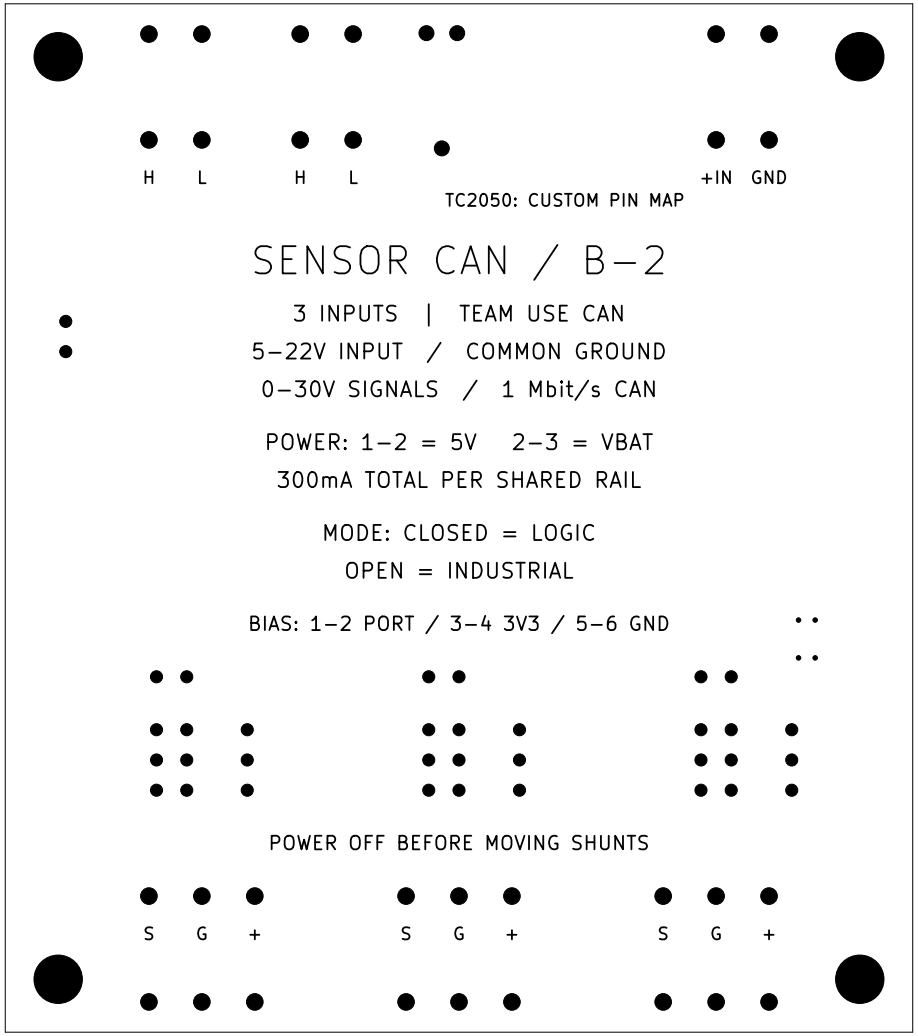

H L H L +IN GND
TC2050: CUSTOM PIN MAP
SENSOR CAN / B-2
3 INPUTS | TEAM USE CAN
5-22V INPUT / COMMON GROUND
0-30V SIGNALS / 1 Mbit/s CAN
POWER: 1-2 = 5V 2-3 = VBAT
300mA TOTAL PER SHARED RAIL
MODE: CLOSED = LOGIC
OPEN = INDUSTRIAL
BIAS: 1-2 PORT / 3-4 3V3 / 5-6 GND
POWER OFF BEFORE MOVING SHUNTS
S G + S G + S G +