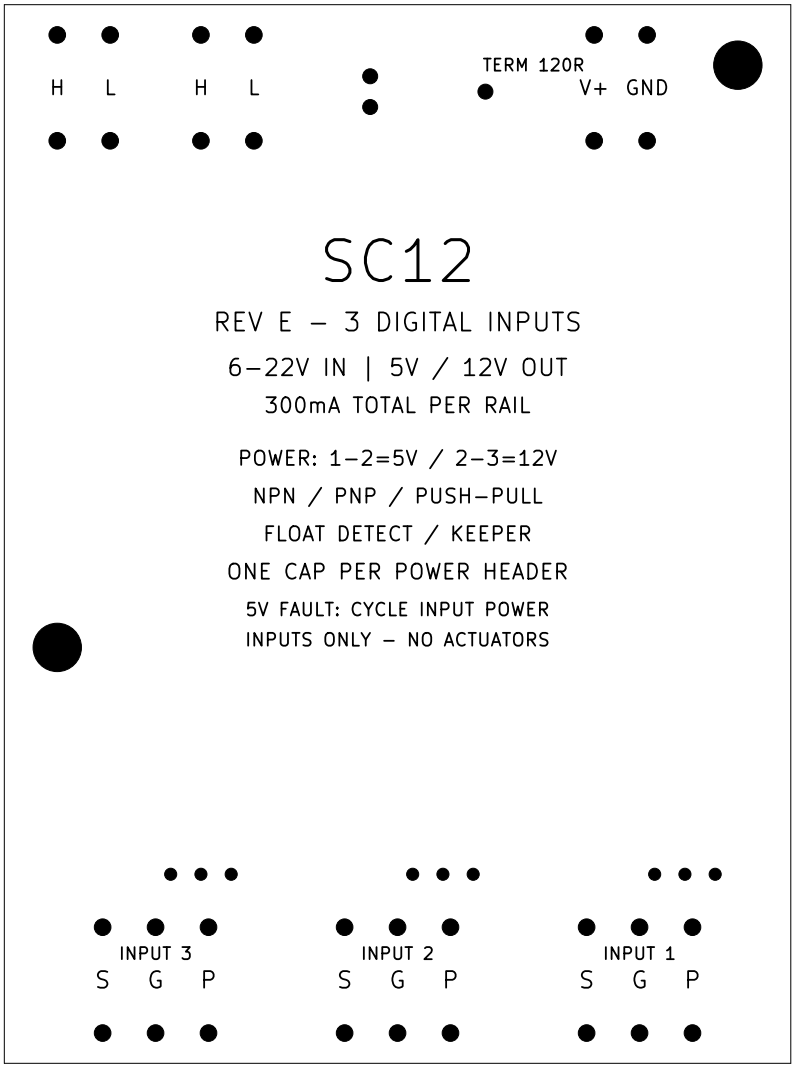

H
L
H
L
TERM 120R
V+
GND
SC12
REV E – 3 DIGITAL INPUTS
6–22V IN | 5V / 12V OUT
300mA TOTAL PER RAIL
POWER: 1–2=5V / 2–3=12V
NPN / PNP / PUSH–PULL
FLOAT DETECT / KEEPER
ONE CAP PER POWER HEADER
5V FAULT: CYCLE INPUT POWER
INPUTS ONLY – NO ACTUATORS
INPUT 3
S G P
INPUT 2
S G P
INPUT 1
S G P