
NANO DELAY / ASSEMBLY MAP

Revision C prototype · component side · 55.88 x 88.90 mm board

Labels identify component locations; this is not the printed silkscreen.

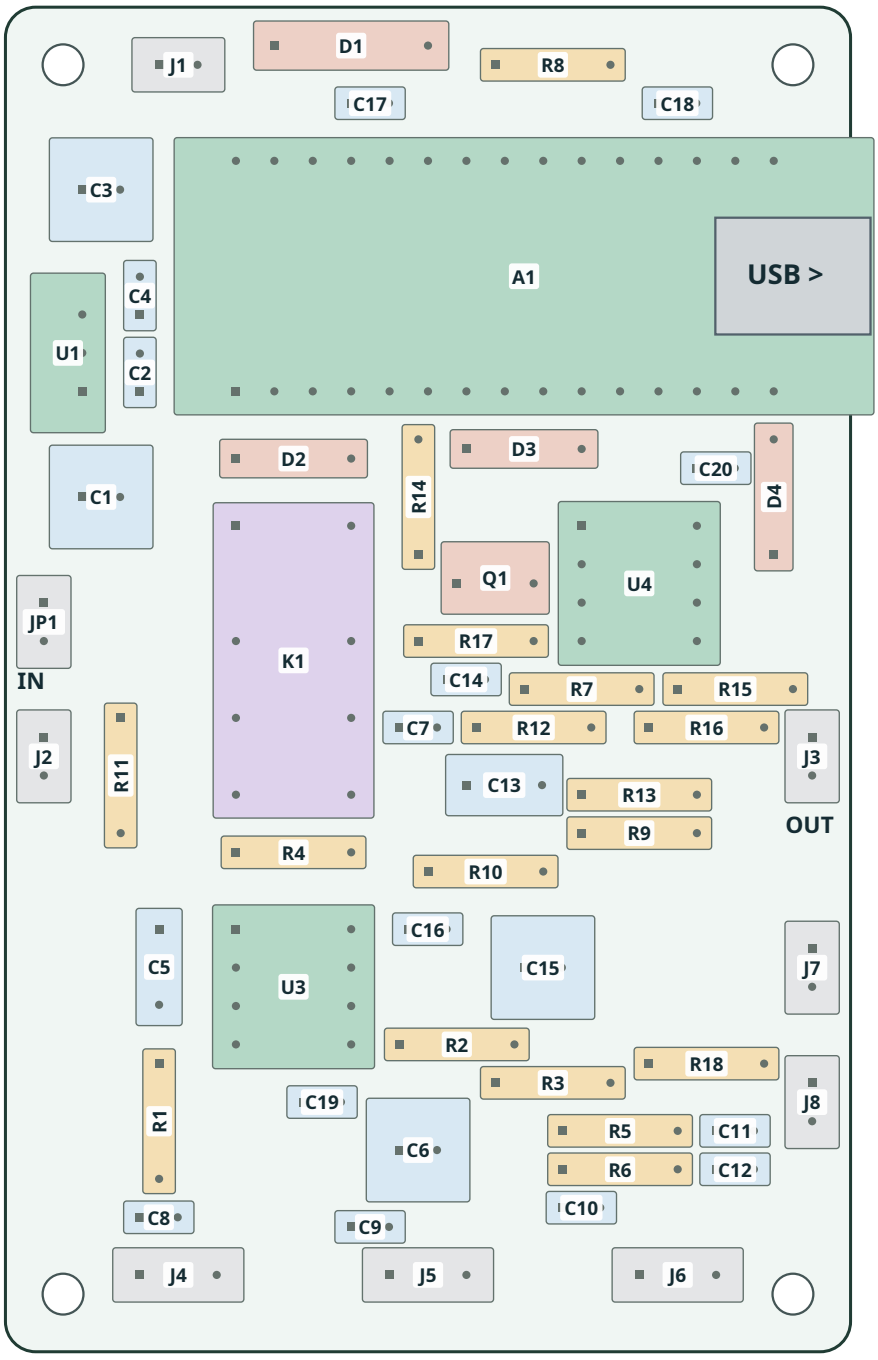

WIRING AT A GLANCE

J1: 9 V power · J2: input · J3: output · J7: momentary footswitch

J4: time · J5: feedback · J6: mix · J8: LED · JP1: removable power link

Square pad = pin 1. Values and wiring labels are on the next page.

Remove JP1 before USB. Use MCP6002 at U3 and 23LC1024 at U4.


Use this map for locations; use the back view and BOM for values.

Unbuilt design: firmware, bench tests and enclosure fit remain to be validated.

NANO DELAY / VALUES & WIRING

Revision C - solder side, as seen from the underside

This view is mirrored relative to the component-side map.

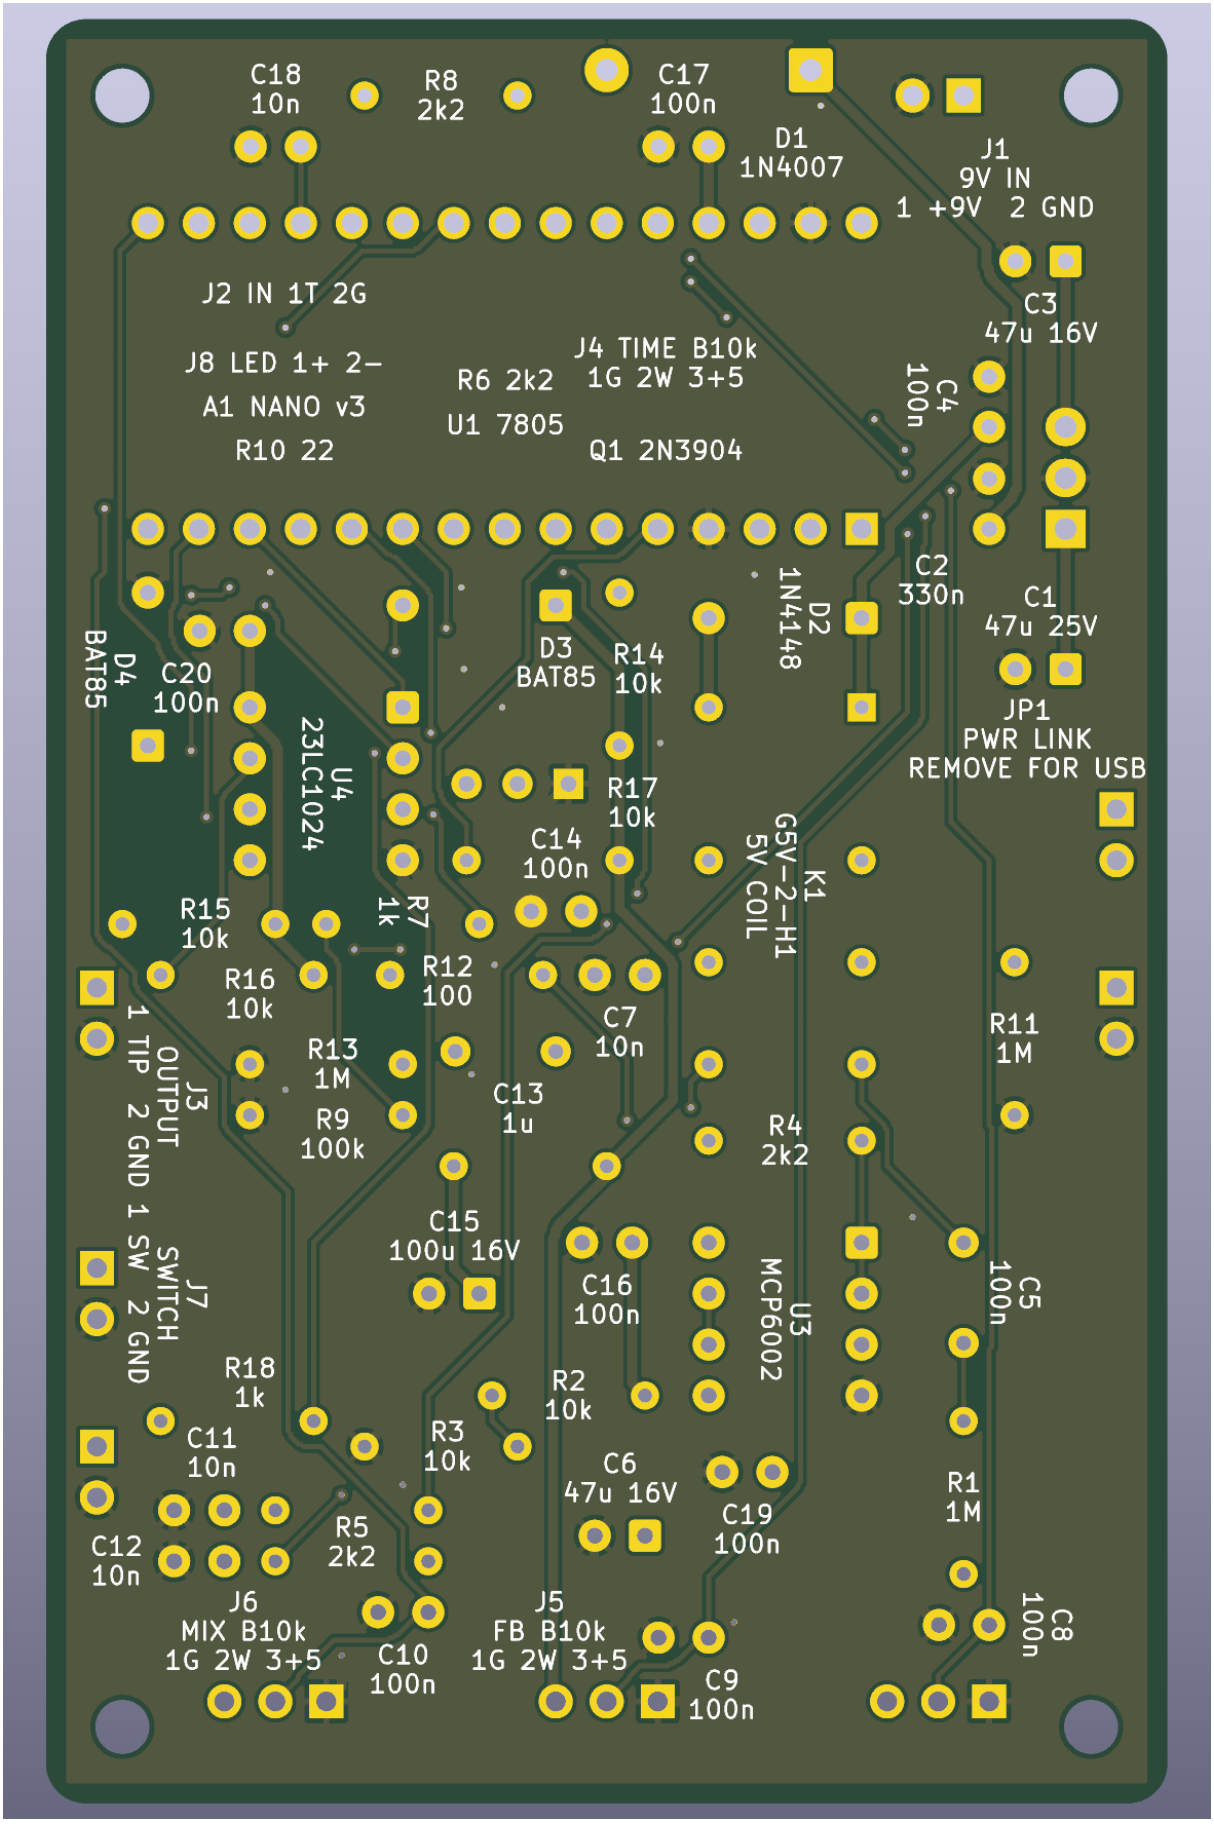

2k2 = 2.2 kOhm; 100n = 100 nF. G = ground, W = wiper, T = tip.