


One-factor sensitivity at the grid-search best case

Each panel varies one input while the other three remain at their best sampled settings.


(a) H_2/CO feed ratio

$T_{\text{in}} = 370^\circ\text{C}$ | $P_{\text{in}} = 15\text{ bar abs}$ | $W_{\text{cat}}/F_{\text{CO},\text{in}} = 140.4\text{ kg}_{\text{cat}}\text{ s mol}_{\text{CO}}^{-1}$

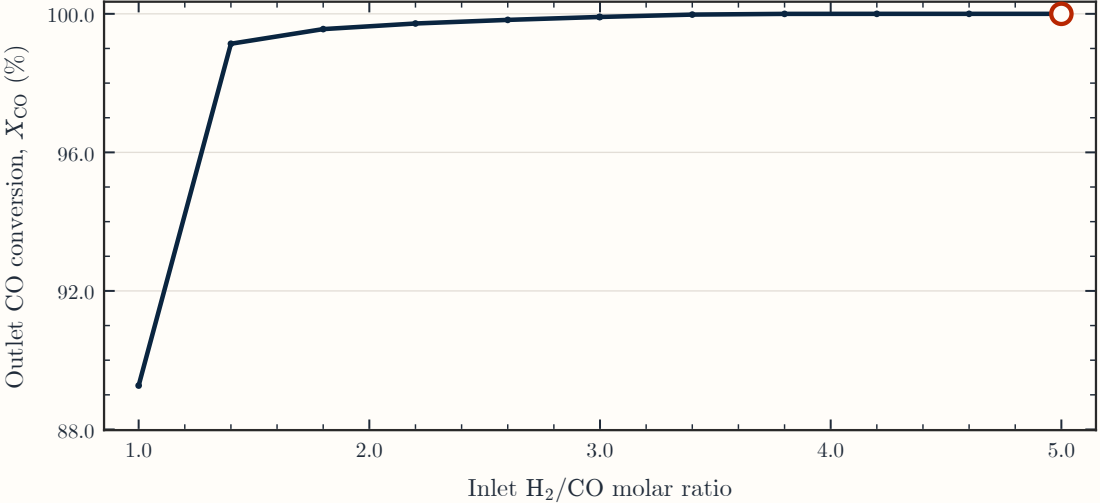


(b) Inlet temperature

$\text{H}_2/\text{CO} = 5.0$ | $P_{\text{in}} = 15\text{ bar abs}$ | $W_{\text{cat}}/F_{\text{CO},\text{in}} = 140.4\text{ kg}_{\text{cat}}\text{ s mol}_{\text{CO}}^{-1}$

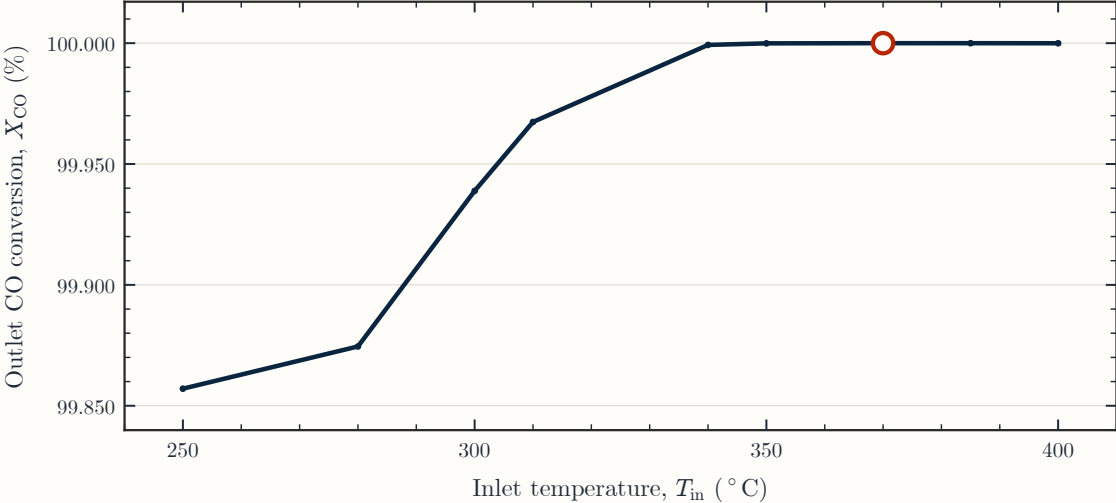

(c) Inlet pressure

$\text{H}_2/\text{CO} = 5.0$ | $T_{\text{in}} = 370^\circ\text{C}$ | $W_{\text{cat}}/F_{\text{CO},\text{in}} = 140.4\text{ kg}_{\text{cat}}\text{ s mol}_{\text{CO}}^{-1}$

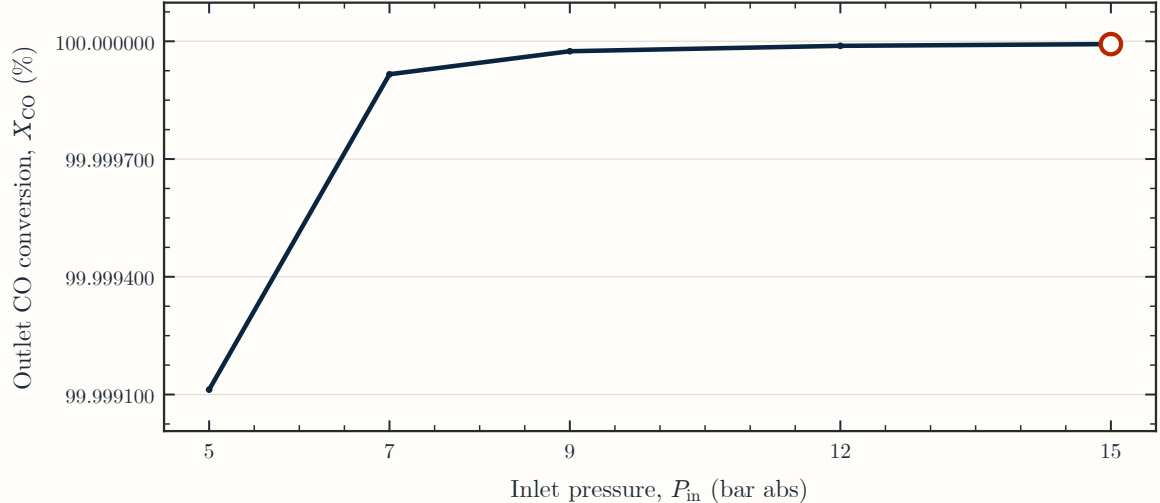

(d) Catalyst space time

$\text{H}_2/\text{CO} = 5.0$ | $T_{\text{in}} = 370^\circ\text{C}$ | $P_{\text{in}} = 15\text{ bar abs}$

