



A COMMUNITY OF CHOICE

CITY ENGINEER'S OFFICE
2101 O'Neil Avenue
Cheyenne, Wyoming 82001

MEMO

TO: Honorable Mayor Patrick Collins, City of Cheyenne
City Council Members

FROM: Rick Amen, PE, City Traffic Engineer


DATE: March 18, 2026

SUBJECT: Resolution for Crosswalk Criteria and Guidelines

Please find attached the proposed resolution and document for your approval and execution. The resolution is summarized below for your information.

Purpose of Resolution:

The purpose of the Crosswalk Criteria and Guidelines is to help guide City staff in determining when and where a crossing treatment should be installed and how a crosswalk can be improved in the city of Cheyenne. The objective is to guide consistent and data-driven decisions that enhance pedestrian safety, improve infrastructure accessibility, and strengthen connectivity of pedestrian facilities, all while balancing and maintaining traffic operations. The Crosswalk Criteria and Guidelines supplement existing City of Cheyenne design standards and do not replace federal, state, or local regulations.

There are no financial implications for this resolution but may require funding when crosswalk treatments are identified to be installed. Your approval of this resolution is respectfully appreciated.

RESOLUTION NO. _____

ENTITLED: “A RESOLUTION APPROVING AND ADOPTING THE CITY OF CHEYENNE CROSSWALK CRITERIA AND GUIDELINES AND CONFIRMING THE AUTHORITY OF THE CITY ENGINEER TO IMPLEMENT CROSSWALK TREATMENTS.”

WHEREAS, the City of Cheyenne is responsible for maintaining safe and efficient public streets and transportation infrastructure for motorists, pedestrians, and other users;

WHEREAS, pedestrian crossings are an important component of the City’s transportation system and must be evaluated and implemented in a consistent manner that promotes safety, accessibility, and operational efficiency;

WHEREAS, the City has developed the Crosswalk Criteria and Guidelines, dated March 2026, to establish a standardized framework for evaluating potential crosswalk locations and determining appropriate crossing treatments based on engineering analysis, pedestrian demand, roadway characteristics, and safety considerations;

WHEREAS, the Crosswalk Criteria and Guidelines are intended to complement existing City design standards and ensure consistency with applicable federal, state, and local laws and engineering standards;

WHEREAS, the Governing Body finds that adopting the Crosswalk Criteria and Guidelines will promote transparent, data-driven decision making regarding pedestrian crossing infrastructure throughout the City of Cheyenne.

NOW, THEREFORE, BE IT RESOLVED BY THE GOVERNING BODY OF THE CITY OF CHEYENNE, WYOMING, that the document entitled “City of Cheyenne Crosswalk Criteria and Guidelines,” dated March 2026, as presented to the Governing Body and on file with the Office of the City Engineer, is hereby approved and adopted as the policy of the City of Cheyenne governing the evaluation, selection, and implementation of crosswalk installations and treatments within the City;

BE IT FURTHER RESOLVED, that the City Engineer shall have the authority to evaluate, approve, modify, and implement crosswalk treatments within the City of Cheyenne in accordance with this Policy, accepted engineering practices, and applicable federal, state, and city standards;

BE IT FURTHER RESOLVED, that the City Engineer, in coordination with appropriate City departments, may apply the Crosswalk Criteria and Guidelines when evaluating existing crosswalks, reviewing requests for new crosswalk installations, and implementing crosswalk improvements throughout the City;

BE IT FURTHER RESOLVED, that a copy of the Crosswalk Criteria and Guidelines shall be maintained on file with the Office of the City Engineer and made available for public inspection; and

BE IT FINALLY RESOLVED, that the Crosswalk Criteria and Guidelines shall serve as the official policy of the City of Cheyenne regarding crosswalk evaluation and treatment unless and until amended or replaced by subsequent action of the Governing Body.

PRESENTED, READ AND ADOPTED THIS _____ DAY OF _____,
2026.

Patrick Collins, Mayor

(SEAL)

ATTEST:

Kylie Soden, City Clerk



City of Cheyenne

Crosswalk Criteria and Guidelines

March, 2026

Table of Contents

FOREWORD	2
INTRODUCTION	3
<i>Purpose and Scope</i>	<i>3</i>
<i>How to Use These Guidelines</i>	<i>3</i>
CROSSWALK DEFINITIONS AND STANDARDS	4
<i>Crosswalk Definitions</i>	<i>4</i>
<i>Other Relevant Regulations</i>	<i>4</i>
<i>Design Standards</i>	<i>5</i>
EVALUATING CANDIDATE LOCATIONS	7
<i>Definitions of Criteria</i>	<i>7</i>
<i>Exceptions to Criteria</i>	<i>10</i>
EVALUATING TREATMENTS	11
<i>Geometric Treatments</i>	<i>11</i>
<i>Marked Crosswalk Treatment Options</i>	<i>12</i>
<i>Parking Prohibition</i>	<i>16</i>
<i>Decorative Crosswalks</i>	<i>16</i>
<i>City Engineer Authority and Discretion</i>	<i>16</i>
REFERENCES & GLOSSARY	17
APPENDIX A: RELEVANT PEDESTRIAN STATUTES	A-1
<i>Wyoming State Statutes</i>	<i>A-1</i>
<i>Cheyenne City Code of Ordinances</i>	<i>A-2</i>

Foreword

The intent of the Crosswalk Criteria and Guidelines is to provide a standardized reference for evaluating, selecting, and implementing crosswalk installations throughout the city of Cheyenne. It will also assist the City of Cheyenne with maintaining consistent treatments across all locations. These Guidelines are intended to complement existing City of Cheyenne design standards while ensuring alignment with all applicable federal, state, and local regulations.

These guidelines may be amended to reflect changed conditions, public preferences, and incorporate improved methods or technology.

Introduction

Purpose and Scope

The purpose of the Crosswalk Criteria and Guidelines is to help guide City staff in determining when and where a crossing treatment should be installed and how a crosswalk can be improved in the city of Cheyenne. The objective is to guide consistent and data-driven decisions that enhance pedestrian safety, improve infrastructure accessibility, and strengthen connectivity of pedestrian facilities, all while balancing and maintaining traffic operations.

The Crosswalk Criteria and Guidelines supplement existing City of Cheyenne design standards and do not replace federal, state, or local regulations.

How to Use These Guidelines

These guidelines are intended for use by Cheyenne Metropolitan Planning Organization (MPO) and City of Cheyenne traffic engineers and planners. When a location is being considered for either a new crosswalk or crosswalk upgrades – due to public feedback, new construction, internal recommendation, or otherwise – this document transparently provides direction to all parties. These guidelines should also be used in coordination with Public Works, law enforcement, and other City departments or partner agencies as appropriate.

Once a specific location is identified, this document should guide decisions through a step-by-step process. First, the flowchart in **Figure 1** should be used to determine if a marked crosswalk is appropriate, bringing together various criteria to be considered. If a crosswalk is determined to be necessary, or if one already exists at a location, **Table 2** and the “Crosswalk Treatments” section will help provide direction about what, if any, enhanced treatments are recommended.

Crosswalk Definitions and Standards

Crosswalk Definitions

Title 31, Chapter 5, Article 1, Section 31-5-102 of Wyoming State Statute defines a crosswalk as follows:

- (A) That part of a roadway at an intersection included within the connections of the lateral lines of the sidewalks on opposite sides of the highway measured from the curbs or, in the absence of curbs, from the edges of the traversable roadway, and in the absence of a sidewalk on one (1) side of the roadway, that part of a roadway included within the extension of the lateral lines of the existing sidewalk at right angles to the centerline;*
- (B) Any portion of a roadway at an intersection or elsewhere distinctly indicated for pedestrian crossing by lines or other markings on the surface.*

For the purposes of this document, the following definitions further outline crosswalk types:

- Uncontrolled Crosswalk: A legal crosswalk across a roadway approach that is not controlled by a traffic signal or stop sign.
- Controlled Crosswalk: A legal crosswalk across a roadway approach that is controlled by a traffic signal or stop sign.
- Unmarked Crosswalk: A legal crosswalk that does not feature any traffic control markings, consisting of the area between two accessible sidewalks on each side of the roadway.
- Marked Crosswalk: A legal crosswalk that features traffic control markings.
- Midblock Crosswalk: A marked crosswalk that is not at an intersection, featuring traffic control markings to indicate that it is a legal crosswalk.

Pedestrians are permitted to cross a roadway at any marked or unmarked crosswalk.

Other Relevant Regulations

Other sections in the Wyoming State Statutes pertain to aspects of pedestrians' rights when crossing a roadway, either in a crosswalk or outside of a crosswalk. In addition, the City of Cheyenne has adopted a Code of Ordinances that applies within the city. Chapter 10 of the Code of Ordinances specifies regulations related to vehicles and traffic. Key elements of these statutes are copied in Appendix A of this document.

Design Standards

This section is intended to provide relevant standards and guidance in the implementation of alternatives selected in this document.

Manual on Uniform Traffic Control Devices (MUTCD)

The MUTCD provides support, standards, and guidance for the type and design of traffic control devices used for marking and enhancing crosswalks. While the MUTCD does not establish warrants for marking crosswalks or providing such enhancements, it does include application guidance for Pedestrian Hybrid Beacons (PHBs); this guidance is included in the “Treatments Guide” section of this document. According to the MUTCD, an engineering study should be performed before a marked crosswalk is installed, considering criteria such as the number of approach lanes, the presence of a median, pedestrian and bicyclist volumes, average daily traffic (ADT), and 85th percentile speed, among other appropriate factors.

The MUTCD also provides information on when new crosswalks should not be installed on their own, without other measures designed to reduce speeds and shorten crossing distance. Crosswalks should not be installed across uncontrolled roadways where the speed limit exceeds 40 mph and either:

- A. The roadway has four or more lanes of travel without a raised median or pedestrian refuge island and an ADT of 12,000 vehicles per day or greater; or
- B. The roadway has four or more lanes of travel with a raised median or pedestrian refuge island and an ADT of 15,000 vehicles per day or greater.

National Association of City Transportation Officials (NACTO) – Urban Street Design Guide

The NACTO Urban Street Design Guide presents a vision for enhancing urban livability by improving accessibility for pedestrians, cyclists, motorists, and transit riders. It offers detailed recommendations for the design and implementation of both conventional and midblock crosswalks. Key strategies include:

- Incorporating vertical elements at midblock crossings
- Improving sight lines for approaching drivers and pedestrians
- Clearly marking crosswalks and locations
- Installing medians or pedestrian refuge islands

In cases where guidance from NACTO conflicts with the MUTCD, the standards outlined in the MUTCD take precedence.

Federal Highway Administration (FHWA) – Guide for Improving Pedestrian Safety at Uncontrolled Crossing Locations

In January 2018, the FHWA released a guide aimed at assisting transportation agencies in developing policies and procedures for evaluating treatments at uncontrolled pedestrian crossings. An update in July 2018 added specific guidance on the use of Rapid Rectangular Flashing Beacons (RRFBs). The guide outlines a six-step process for identifying appropriate countermeasures:

1. Gather data and engage with the public
2. Assess existing conditions and prioritize crossing locations
3. Examine crash patterns and safety concerns
4. Select countermeasures
5. Reference design and installation resources
6. Explore implementation opportunities and track outcomes

Step 4 of the FHWA guide provides a table of recommended countermeasures for various roadway configurations, traffic speeds, and traffic volumes. Additionally, Step 4 includes a table outlining these countermeasures alongside the specific safety concerns they aim to mitigate, such as high vehicle speeds or failure to yield to pedestrians at crosswalks. This table should serve as a valuable complement to the recommendations provided in this document for roadway designers. The table in Step 4 assisted in informing the City of Cheyenne's guidelines that are presented in **Table 2** of this document.

Evaluating Candidate Locations

Location evaluation is to determine whether a marked crosswalk should be added at a given intersection or midblock location. This step is necessary if there is no marked crosswalk at a candidate location. Location evaluation should be documented using standardized forms or GIS evaluation tools, and existing marked crosswalks may be reevaluated if conditions have substantially changed. The Candidate Location Flowchart in **Figure 1** guides the primary determination for a potential crosswalk. Exceptions are explained in the Definitions of Criteria.

To use the flowchart, start at the top and proceed based on whether the location in question meets or does not meet the listed criteria. Continue until you reach the red box, meaning a crosswalk is not recommended at the candidate location, or the green or blue boxes, meaning the location is appropriate for a marked crosswalk and should proceed with the Treatments Evaluation.

Definitions of Criteria

The following section provides guidance on the criteria shown in the Candidate Location Flowchart and discusses supplemental criteria that may be considered.

Location meets sight distance requirements

The American Association of State Highway and Transportation Officials (AASHTO) *A Policy on Geometric Design of Highways and Streets* manual, also known as the Green Book, describes sight distance as “the length of the roadway ahead that is visible to the driver.” Sight distance should be sufficient such that a vehicle traveling at a given speed for the roadway can safely stop before reaching an object. In Cheyenne, roadways with speed limits of 30 mph or lower must meet the requirement for 227 feet of sight distance. For roadways with speed limits higher than 30 mph, AASHTO distances are in place. **Table 1**, interpolated from Chapter 3.2.2 of the AASHTO Green Book, shows the minimum sight distance required at various 85th percentile speeds. All crossings must meet AASHTO requirements based on the measured 85th percentile speed, rounded up to the nearest 5 mph. Field verification is required and obstructions (vegetation, parked vehicles, etc.) should be mitigated before installation.

Table 1. Stopping sight distance on level roadways

85 th Percentile Speed (mph)	Stopping Sight Distance (ft)
20	115
25	155
30	200
35	250
40	305
45	360
50	425
55	495

Location is 500 feet or further from nearest marked crosswalk

Use GIS tools, Google Earth, or an onsite measurement to determine the distance from the proposed crosswalk to the nearest existing marked crosswalk. A distance of 500 feet or farther is necessary for a location to be considered for a marked crosswalk. This primarily applies to uncontrolled or midblock crossings; at controlled intersections, spacing is less critical. It is preferable to space out crossings at or beyond every block in a downtown or street-grid environment.

Cross street ADT meets volume threshold


Exceptions to the 1,500 vehicles per day threshold may be made with City Traffic Engineer approval. Locations where peak hour volume meets or exceeds 10% of the ADT should be considered for exceptions, such as school crossings.

Peak pedestrian hour(s) meet volume threshold

To determine whether a location meets this criterion, complete a pedestrian count at the candidate location counting the number of pedestrians present in the vicinity likely to use the crosswalk location. This generally includes pedestrians traveling within the influence area of the intersection, which may include pedestrians crossing legally and illegally upstream and downstream of the intersection. When data is available on vulnerable populations, consisting of children, persons with disabilities, and elderly, these populations should count as 1.33 people towards the volume threshold.

Peak hour volume can either come from direct data or be extrapolated from 15-minute data. Latent or potential demand may only be considered when supported by planned development, new facilities, or documented land-use changes.

Figure 1. Candidate Location Flowchart

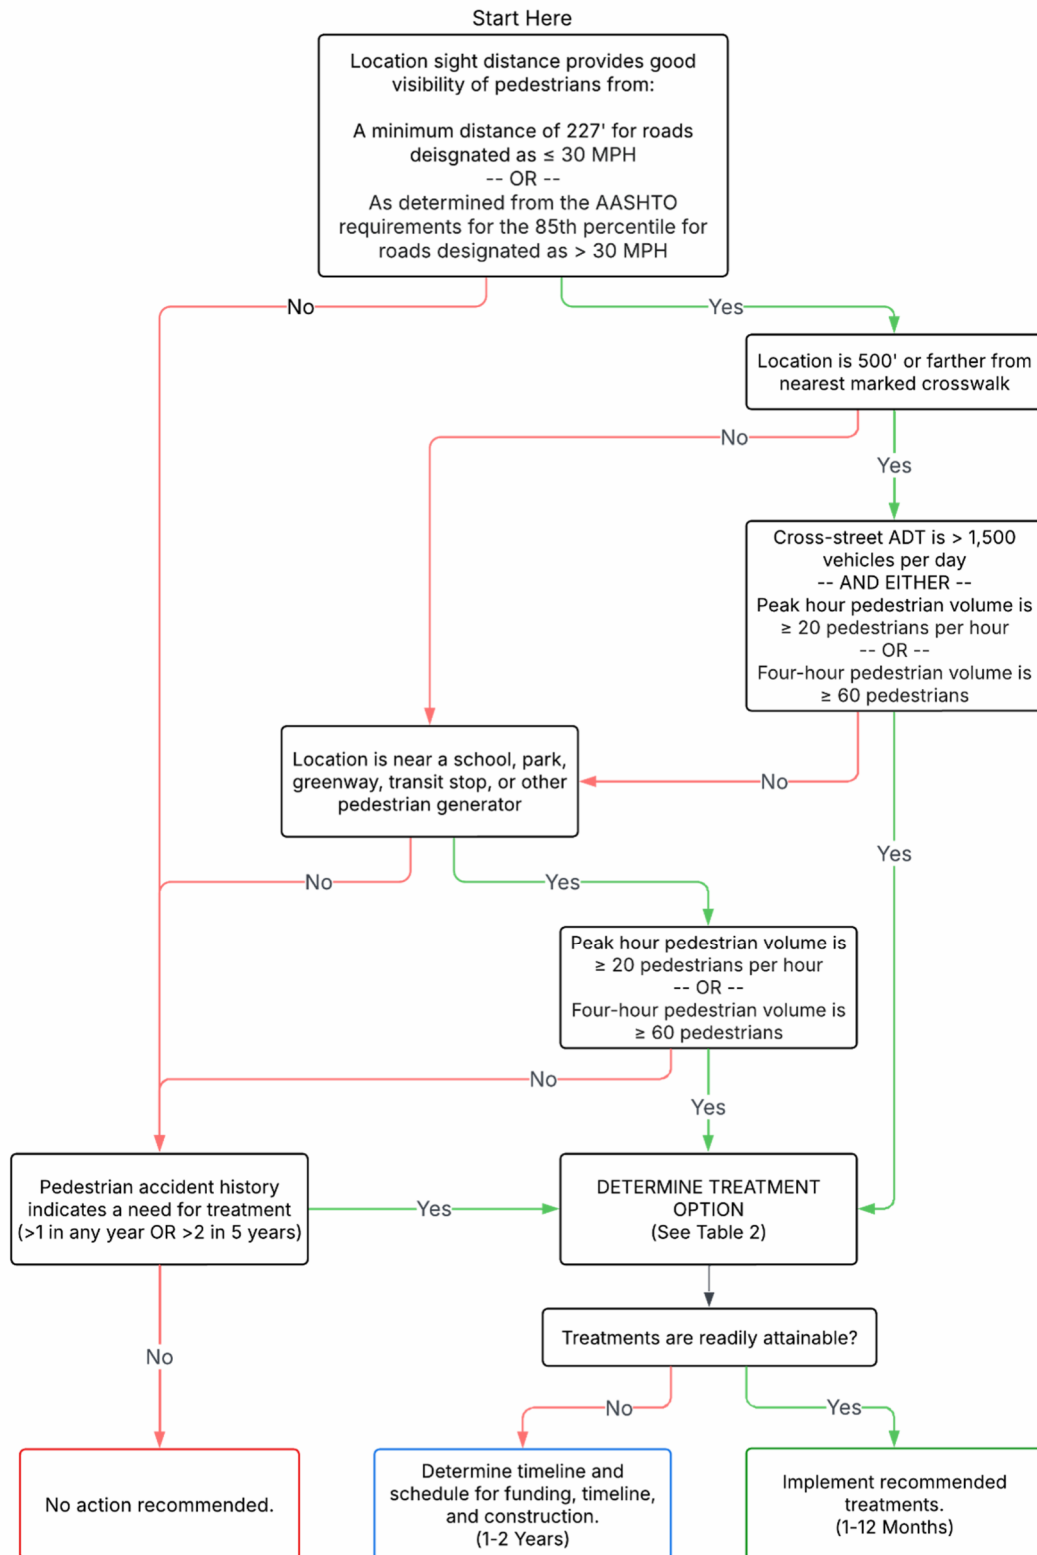

Proximity to pedestrian generators

Candidate locations that directly serve an existing park, school, senior center, transit stop, or similar may be considered to raise priority when compared to other candidate locations. When a location does serve a generator, pedestrian counts should be collected during peak use periods, such as a school's arrival/dismissal hours. Locations that serve pedestrian generators must still meet peak pedestrian volume requirements.

Crash History

Crosswalks can and should be implemented before there is a pedestrian-related crash. Crash history can be used to raise a candidate location's priority, but lack of crash history should not be used to delay implementation. A proactive safety approach is preferred. If a location satisfies this criterion, a crosswalk may be implemented despite potentially failing to satisfy other criteria, as displayed in Figure 1.

Other Criteria – Pedestrian infrastructure requirements

Locations identified as suitable for crosswalk improvements should have existing pedestrian curb ramps. If none exist, new ones must be built in accordance with Americans with Disabilities Act (ADA) and Public Right-of-Way Accessibility Guidelines (PROWAG) standards, including ramps, slopes, landings, and detectable warnings.

Midblock Crosswalks and T-Intersections

Midblock crosswalks are generally discouraged except where pedestrian desire lines are strong and adjacent crosswalks are more than 500 feet away. When crosswalks are installed at T-intersections, they should be placed on the lower conflicting leg and supported by appropriate signage or geometric treatments.

Exceptions to Criteria

In certain circumstances, deviations from the criteria outlined above may be reasonable. Any such exceptions must receive approval from the City Traffic Engineer and must be documented in writing with justification. Cases not defined in this guide should be referred to the City Traffic Engineer for review. Engineering judgement should be applied in all situations.

Evaluating Treatments

Treatment evaluation is for determining what aspects of each crossing should be included or excluded based on several factors. This is a necessary step if the location evaluation has shown a need for a marked crosswalk; however, the presence of an existing marked crosswalk does not always indicate that its treatments must be modified. Treatments must comply with ADA/PROWAG accessibility standards, including ramps, slopes, and detectible warnings. Re-evaluation of existing marked crosswalks should be up to the judgement of the City Traffic Engineer.

Geometric Treatments

Before implementing a marked crosswalk, safety considerations should be made for the corridor, including:

- Reducing travel speed
- Narrowing or eliminating travel lanes
- Reducing vehicle volume
- Other traffic calming measures

These considerations may improve safety for pedestrians but implementation is not always required. In addition, there are various geometric treatments that could be considered for new marked crosswalks but are not required. Drainage and emergency services impacts must be considered prior to implementation of each. The following section discusses and explains two geometric treatment options for consideration.

Curb Extensions

Curb extensions shorten the crossing distance for pedestrians, reducing the time they are exposed to vehicle traffic. These treatments also increase pedestrian visibility to other users. The treatments also have been shown to reduce vehicle speeds due to visually narrowing the roadway.

Pedestrian Refuge Island

Pedestrian refuge islands are a raised median separating two directions of traffic and shortening the distance pedestrians must cross at once, allowing them to cross the street in two stages rather than one. Pedestrian refuge islands should only be installed on multi-

lane roadways with an existing two-way left-turn lane (TWLTL), up to the discretion of the City Traffic Engineer, as installation on roadways without an existing median or TWLTL requires lane shifts and/or drops. Refuge islands should be prioritized where crossing width exceeds 30 feet and should maintain emergency access and drainage functions.

Marked Crosswalk Treatment Options

Once it has been determined that a marked crosswalk is necessary and feasibility of geometric enhancements has been evaluated, the appropriate crosswalk treatment should be determined. There are three levels of treatment enhancements that could be applied.

Table 2 on the next page outlines which level of treatment to apply based on vehicle volume, 85th percentile speed, pedestrian volume, and general roadway configuration. Designations were determined from testing using intersections in Cheyenne and engineering judgement. When applying **Table 2**, Level B may be upgraded to Level C with approval of the City Traffic Engineer, and any analyst may consider unusual site aspects that differentiate the crosswalk from normal conditions to make recommendations.

Table 2. Recommended treatment at marked crosswalks

General Roadway Configuration	Vehicle ADT ≤ 1,500			1,500 < Vehicle ADT ≤ 4,000			4,000 < Vehicle ADT ≤ 10,000			Vehicle ADT > 10,000		
	Speed ≤ 30 mph		Speed > 30 mph	Speed ≤ 35 mph		Speed > 35 mph	Any Speed	Speed ≤ 35 mph	Speed > 35 mph	Any Speed	Speed ≤ 35 mph	Speed > 35 mph
	≤ 20 ped/hr	> 20 ped/hr		≤ 20 ped/hr	> 20 ped/hr		≤ 20 ped/hr	> 20 ped/hr		≤ 20 ped/hr	> 20 ped/hr	
≤ 2 Lanes	A	B*	C	A	C	C	A	C	C	A	C	C
3 Lanes w/ TWLTL	A	C	C	A	C	C	A	C	C	A	C	C
4+ Lanes	A	D	D	A	D	D	A	D	D	A	D	D

On roadways that are 5 or greater lanes, crosswalks should not be installed. The City Traffic Engineer and/or City Engineer will determine the appropriateness of pedestrian infrastructure for larger roadways.

* City Traffic Engineer may upgrade treatment from Level B to Level C based on roadway or land use conditions. Engineering judgment should be used.

Level	Treatment
A	Not Recommended
B	Markings & Signing
C	RRFB
D	PHB

Note: General roadway configuration means the number of lanes present, on average, along the roadway. Engineering judgement should be used to determine roadway configuration if a given roadway does not clearly adhere to one of the three configurations in Table 2.

Additional levels of treatment may be considered but will be best determined after further evaluations and consideration.

Level A: Not Recommended

Crosswalk should not be installed except as part of a signalized intersection with incorporated pedestrian phases.


Level B: Markings and Signing

The most basic treatment for a location that qualifies for a marked crosswalk is markings and signing only – every marked crosswalk must have at least these treatments.

Markings should be standard crosswalk markings and should match the style of nearby existing crosswalks. Refer to the MUTCD for requirements regarding crosswalk dimensions and applicable supplemental markings, if any.

Signs should be sized appropriately in accordance with MUTCD guidelines. Signs used could include W11-2, W11-15, and S1-1, and placards used could include W16-7P, W11-15P, W16-9P. Signs at crosswalks should be placed and paired in accordance with MUTCD standards, and advance signs should be placed and paired in accordance with MUTCD standards.

Figure 2. Examples of Standard Pedestrian Crossing Signage

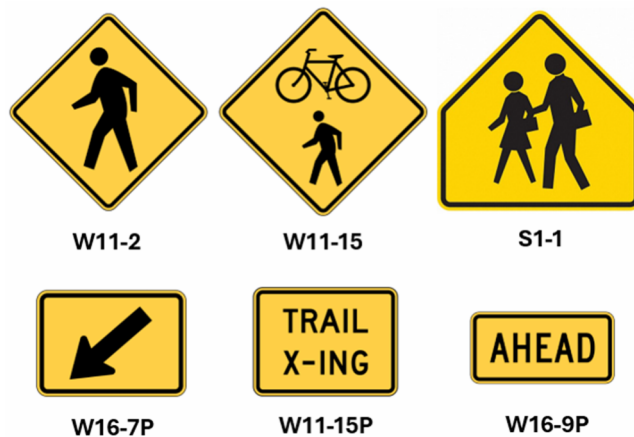

Costs to implement Level B treatment generally range from \$7,000 to \$15,000.

Level C: Rapid Rectangular Flashing Beacon

Rapid Rectangular Flashing Beacons (RRFBs) are generally designated for locations with higher traffic volumes, speeds, and more travel lanes. RRFBs increase the visibility of a pedestrian who wishes to cross.

Crosswalks should still include Level B markings and signage in addition to an RRFB. RRFBs should be mounted above the curb adjacent to the crosswalk, with push buttons placed in accordance with ADA/PROWAG requirements. Where a median is present, signs and RRFBs should be mounted in the median in addition to each side of the road.

Costs to implement Level C treatment generally range from \$17,000 to \$25,000.

Level D: Pedestrian Hybrid Beacon

Pedestrian Hybrid Beacons (PHBs), also known as HAWK signals, should be used only where Level B or Level C treatments are not effective for providing safe crossings. The use of full traffic signals at pedestrian crossings is not preferable in Cheyenne. Crosswalks should still include Level B markings and signage in addition to a PHB.

The MUTCD provides guidance on the installation of PHBs on major streets. **Figure 3** and **Figure 4** outline the MUTCD recommendations for when a PHB should be installed. Using the figure associated with the major street's 85th percentile speed, determine the number of vehicles in the peak hour in both directions of the major street and the number of pedestrians in the peak hour. If the plotted point falls above the line corresponding to the proposed crosswalk length, a PHB is recommended.

Costs to implement Level D treatment generally range from \$60,000 to \$130,000.

Figure 3. MUTCD Figure 4J-1 for the installation of PHBs on roadways with speeds of 35 mph or less


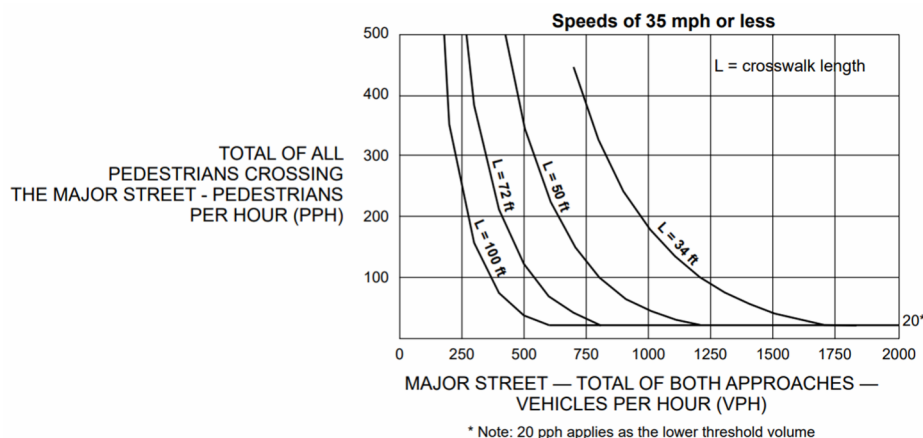


Figure 4. MUTCD Figure 4J-2 for the installation of PHBs on roadways with speeds of more than 35 mph

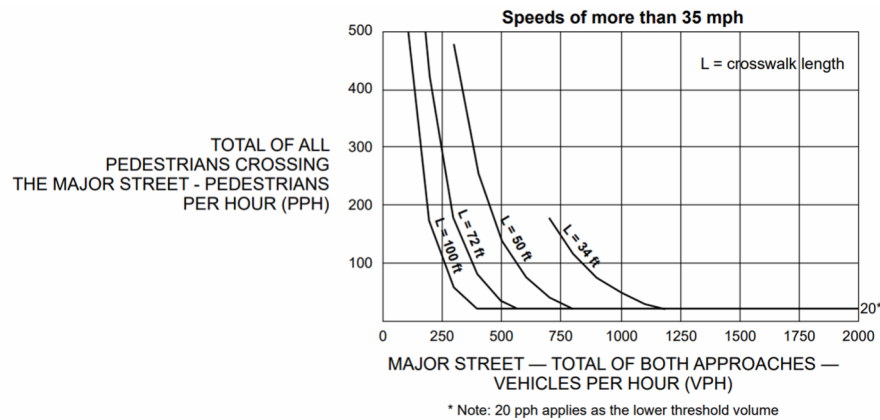

Parking Prohibition

Wyoming State Statute 31-5-504 prohibits parking within 20 feet of a crosswalk at an intersection, and the Cheyenne Code of Ordinances section 10.52.020 prohibits parking adjacent to the curved portion of a “bump out,” which applies to curb extensions described in this document. These restrictions should be considered when determining whether supplemental parking markings and signage should be installed. Parking may require to be daylighted when new crosswalks are added. These changes should be implemented at the time of the crossing improvements.

Decorative Crosswalks

Decorative crosswalks are generally not recommended in the City of Cheyenne. All crosswalks must comply with MUTCD Section 3C and any supplemental markings may not compromise the visibility and uniformity of standard markings. Decorative crosswalks are typically not high visibility crosswalks which are considered the safest type of treatments for crosswalk markings.

City Engineer Authority and Discretion

The City Engineer shall have the authority to evaluate, approve, modify, and implement crosswalk treatments within the city of Cheyenne in accordance with this Policy, accepted engineering practices, and applicable federal, state, and city standards.

Crosswalk treatments may be installed, modified, or removed at the discretion of the City Engineer based on engineering judgment and consideration of factors including, but not limited to, pedestrian demand, vehicular volumes and speeds, roadway classification, crash history, land use context, and operational or maintenance constraints.

References & Glossary

Certain information contained in these Guidelines may have originated from an outside source. These sources are referenced below.

- American Association of State Highway and Transportation Officials (AASHTO). *A Policy on Geometric Design of Highways and Streets 2011, 6th Edition*.
- *Cheyenne City Code*. December 2025. Accessed 28 October 2025. Available from https://library.municode.com/wy/cheyenne/codes/code_of_ordinances ; internet.
- US Department of Transportation, Federal Highway Administration. *The Manual on Uniform Traffic Control Devices*. 11th ed. Accessed 23 October 2025. Available from https://mutcd.fhwa.dot.gov/kno_11th_Edition.htm ; internet.
- Wyoming State Legislature. *Wyoming Statute*. 2025. Accessed 28 October 2025. Available from <https://wyoleg.gov/NXT/gateway.dll?f=templates&fn=default.htm> ; internet.

Glossary terms are written out fully for their first use in these Guidelines and are provided here as a reference. All other words in these Guidelines have customary dictionary definitions or are defined in the body of the Guidelines.

AASHTO – American Association of State Highway and Transportation Officials

ADA – Americans with Disabilities Act

ADT – Average Daily Traffic

FHWA – Federal Highway Administration

GIS – Geographic Information System

MPO – Metropolitan Planning Organization

MUTCD – Manual on Uniform Traffic Control Devices

NACTO – National Association of City Transportation Officials

PHB – Pedestrian Hybrid Beacon

PROWAG – Public Right-of-Way Accessibility Guidelines

RRFB – Rapid Rectangular Flashing Beacon

TWLT – Two-Way Left Turn Lane

Appendix A: Relevant Pedestrian Statutes

Wyoming State Statutes

W.S. 31-5-602. Right-of-way in crosswalks

- (a) When traffic-control signals are not in place or not in operation, the driver of a vehicle shall yield the right-of-way by slowing down or stopping if need be to yield, to any pedestrian within or entering a crosswalk at either edge of the roadway.*
- (b) When traffic-control signals are not in place or not in operation at a school crosswalk, the driver of a vehicle shall yield the right-of-way to any pedestrian within or entering a school crosswalk at either edge of the roadway by slowing down or stopping.*
- (c) No pedestrian shall suddenly leave a curb or other place of safety and walk or run into the path of a vehicle which is so close as to constitute an immediate hazard.*
- (d) Subsection (a) of this section does not apply under the conditions stated in W.S. 31-5-603(b).*
- (e) Whenever any vehicle is stopped at a marked crosswalk or at any unmarked crosswalk at an intersection to permit a pedestrian to cross the roadway, the driver of any other vehicle approaching from the rear shall not overtake and pass the stopped vehicle.*

W.S. 31-5-603. Crossing at other than crosswalks.

- (a) Every pedestrian crossing a roadway at any point other than within a marked crosswalk or within an unmarked crosswalk at an intersection shall yield the right-of-way to all vehicles upon the roadway.*
- (b) Any pedestrian crossing a roadway at a point where a pedestrian tunnel or overhead pedestrian crossing has been provided shall yield the right-of-way to all vehicles upon the roadway.*
- (c) Between adjacent intersections at which traffic-control signals are in operation pedestrians shall not cross at any place except in a marked crosswalk.*
- (d) No pedestrian shall cross a roadway intersection diagonally unless authorized by official traffic-control devices. When authorized to cross diagonally, pedestrians shall cross only in accordance with the official traffic-control devices pertaining to the crossing movements.*

Cheyenne City Code of Ordinances

Chapter 10.20.080 – Crosswalks and safety zones.

The city traffic engineer is authorized to:

- A. Designate and maintain, by appropriate devices, marks, or lines upon the surface of the roadway, crosswalks at intersections where in his or her opinion there is particular danger to pedestrians crossing the roadway, and at such other places as he or she may deem necessary;
- B. Establish safety zones as he or she may deem necessary for the protection of pedestrians.

Chapter 10.48.020 – Crossing at right angles.

Except where otherwise indicated by a crosswalk or other official traffic-control device, a pedestrian shall cross a roadway at right angles to the curb or by the shortest route to the opposite curb.

Chapter 10.48.030 – Prohibited Crossing.

No pedestrian shall cross a roadway other than a crosswalk in the central business district.

Chapter 10.48.060 – Pedestrians prohibited from impeding traffic.

Pedestrians shall not enter or remain upon a street or thoroughfare in a manner which impedes the vehicular traffic.