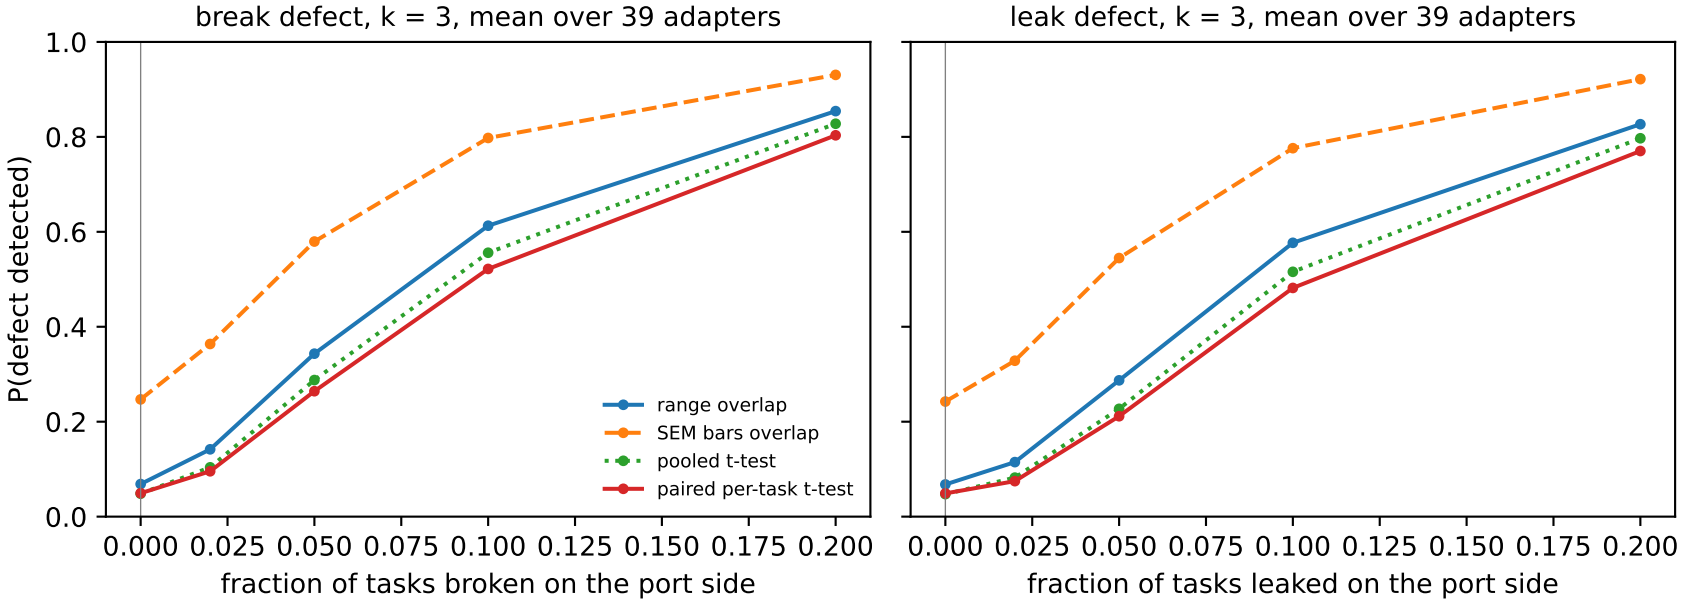
break defect, k = 3, mean over 39 adapters
leak defect, k = 3, mean over 39 adapters
P(defect detected)
1.0
0.8
0.6
0.4
0.2
0.0
range overlap
SEM bars overlap
pooled t-test
paired per-task t-test
0.000 0.025 0.050 0.075 0.100 0.125 0.150 0.175 0.200
fraction of tasks broken on the port side
0.000 0.025 0.050 0.075 0.100 0.125 0.150 0.175 0.200
fraction of tasks leaked on the port side