ZOLOTO®
VALVES
since 1966

AN ISO 9001, 14001 & 45001
CERTIFIED COMPANY

# 1053A Forged Brass Y-Type Strainer (Screwed) PN 25

## Salient Features

- Screwed Female Ends to BSP.
- Stainless Steel (S.S 304) Ø1 mm perforated sheet screen is guided in the body and cover.
- Fine finish and smooth contours reduce pressure drop in the strainer.
- Large screening area makes the strainer efficient in performance.




Test Pressure (Hydrostatic) :
Shell : 35 kg/cm²g (500 psig)
Working Pressure : 25 kg/cm²g (350 psig)

**Suitable For**
Steam*, Water, Oil, Air*, Gases*
*Suitable for pressure upto 6.9 kg/cm²g (100 psig)

## Materials

| P.No. | Name of Part | Material of Construction | Specification | Quantity |
|---|---|---|---|---|
| 1 | Body | Forged Brass | IS 6912 Gr. FLB | 1 |
| 2 | Screen (Ø1 mm Perforation) | Stainless Steel | Type 304 | 1 |
| 3 | Gasket | PTFE | BS EN 12086-1 | 1 |
| 4 | Cover | Forged Brass | IS 6912 Gr. FLB | 1 |

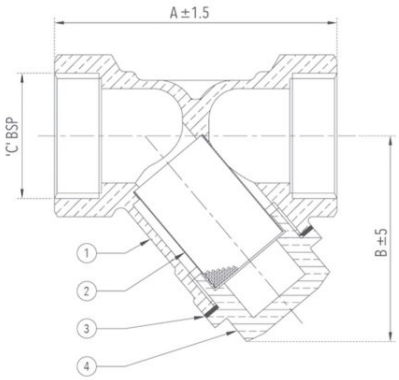


## Sizes / Dimensions

| Size (Inches) | Size (mm) | A ±1.5 | B ±5 | C |
|---|---|---|---|---|
| 1/2 | 15 | 54 | 45 | 1/2″ |
| 3/4 | 20 | 67.5 | 56 | 3/4″ |
| 1 | 25 | 75 | 56 | 1″ |
| 1 1/4 | 32 | 94 | 73 | 1 1/4″ |
| 1 1/2 | 40 | 100 | 80 | 1 1/2″ |
| 2 | 50 | 126 | 99 | 2″ |

ZOLOTO INDUSTRIES
Zoloto House, 11th Milestone, Lambra, Nakodar Road,
Jalandhar – 144026. Punjab. INDIA

https://www.zolotovalves.com

Phones : +91 181 4676666 (100 Lines)
Facsimile: +91 181 2792500 & 2251600
Email : sales@zolotovalves.com, mktg@zolotovalves.com