
XDA-3004

4× 1200 WATTS ■ AC Operation

CLASS D | 19" RACK MOUNT



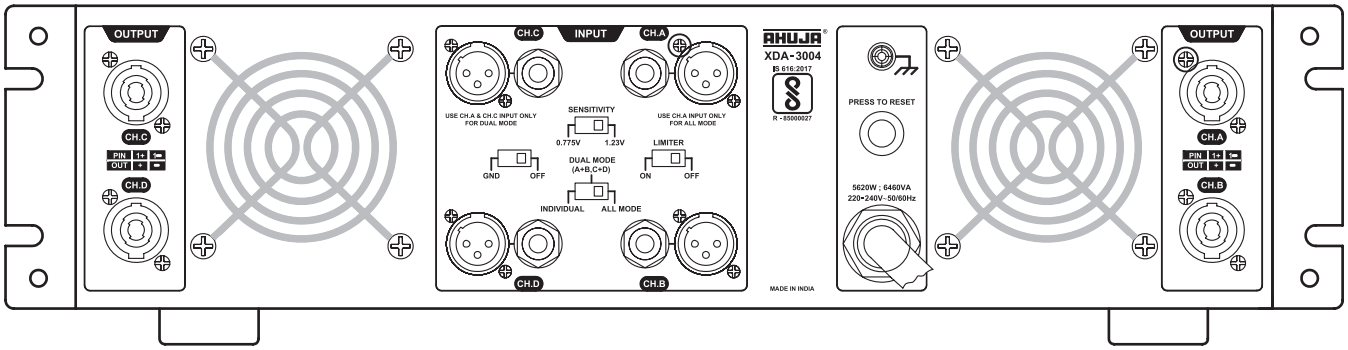

- Four Channel Class D Power Amplifier.
- 1200 Watts rated output from each channel .
- Three selectable modes of operation ie., INDIVIDUAL, DUAL and ALL.
- Built-in Limiter circuit with ON/OFF swtich.
- Toroidal Transformer power supply.
- Two selectable input sensitivities.
- Built-in Amplifier Protection system: DC offset, HF, Short circuit, Thermal, Overload, Overvoltage & Clip Monitoring.
- Rack mountable in 2.5U Size.
- BIS approved.

SPECIFICATIONS	XDA-3004
CONTINUOUS RATED POWER	
STEREO/MONO	8Ω : 700W + 700W + 700W + 700W RMS, 4Ω : 1200W + 1200W + 1200W + 1200W RMS
THD + N	< 0.1%
FREQUENCY RESPONSE (-1dB)	20-20,000Hz
POWER BANDWIDTH (0.5% THD)	20-20,000Hz
INPUT SENSITIVITY	0dBu (775mV) & 4dBu (1.23V) (Selectable)
INPUT IMPEDANCE	10k Unbalanced, 20k Balanced
SIGNAL TO NOISE RATIO	> 100dB
CHANNEL SEPARATION	> 65dB at 1kHz
DAMPING FACTOR (8Ω)	>1000
SLEW RATE	20V/μS
PROTECTIONS	Temperature, DC, RFI, Short Circuit, Overload, Overvoltage, Built-in Limiter (ON/OFF)
	AC: Circuit Protector 20A; ± DC: Fuse 2×12A (T 12A L) for each channel
INPUT CONNECTORS	4×XLR, Stereo Phone Jack 6.3mm
OUTPUT CONNECTORS	Speakon 4-Way for each channel
COOLING	4 × Variable Speed DC Fan with Temperature Sensing
FRONT PANEL CONTROLS	4×41 Step Level Attenuators
INDICATORS	Power ON/AC Mains Protection, Signal, Clip, Temperature, Protect (Ch. A, B, C & D)
POWER CONSUMPTION (RATED)	5620W; 6460VA @ 220-240V ~ 50/60Hz
DIMENSIONS	W482 × H126 × D540mm
WEIGHT	28.50kg