
XDA-7002

2400+2400 WATTS ■ AC Operation

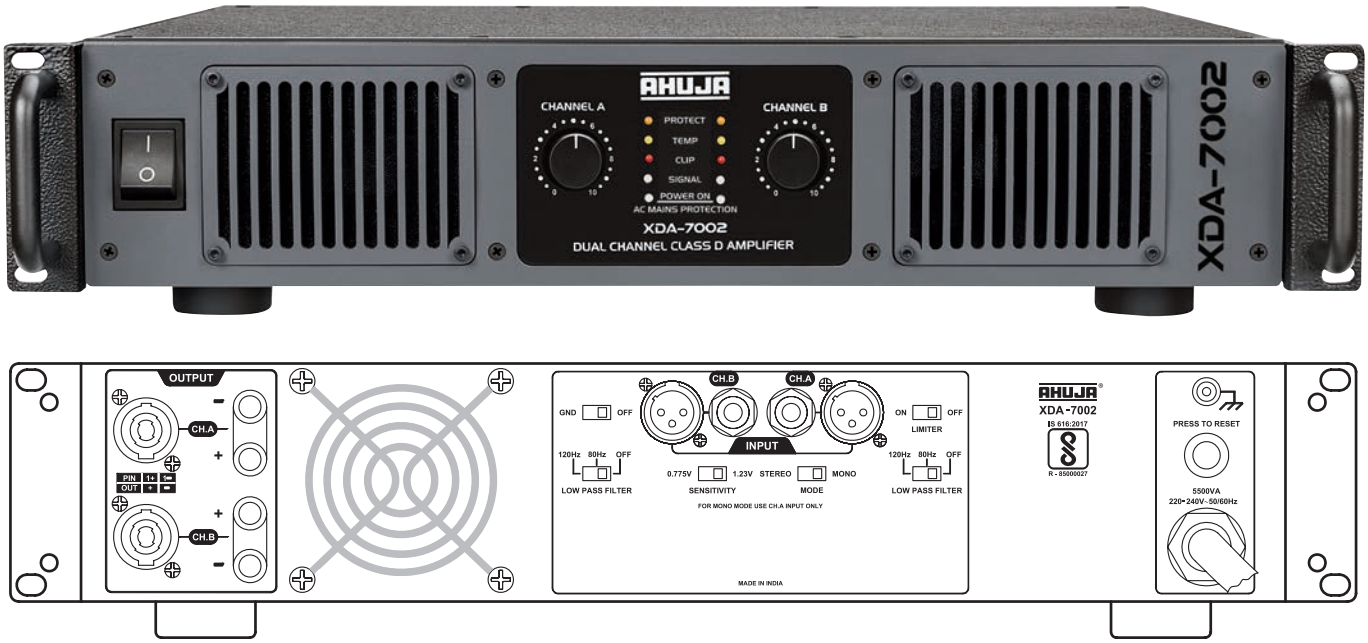

- Dual Channel Class D Power Amplifier.
- 2400 + 2400 Watts rated output.
- 80Hz/120Hz Low Pass Filter.
- Built-in Limiter circuit with ON/OFF swtich.
- Toroidal Transformer power supply.
- Two selectable input sensitivities.
- Built-in Amplifier Protection system: DC offset, HF, Short circuit, Thermal, Overload, Overvoltage & Clip Monitoring.
- Compact 2U Size.
- BIS approved.

SPECIFICATIONS	XDA-7002
CONTINUOUS RATED POWER	
STEREO/MONO	8Ω : 1350W + 1350W RMS, 4Ω : 2400W + 2400W RMS
THD + N	< 0.1%
FREQUENCY RESPONSE (-1dB)	20-20,000Hz
LOW PASS FILTER	80/120Hz @ 24dB per octave
POWER BANDWIDTH (0.5% THD)	20-20,000Hz
INPUT SENSITIVITY	0dBu (775mV) & 4dBu (1.23V) (Selectable)
INPUT IMPEDANCE	10k Unbalanced, 20k Balanced
SIGNAL TO NOISE RATIO	> 100dB
CHANNEL SEPARATION	> 65dB at 1kHz
DAMPING FACTOR (8Ω)	>1000
SLEW RATE	20V/μS
PROTECTIONS	Temperature, DC, RFI, Short Circuit, Overload, Overvoltage, Built-in Limiter (ON/OFF)
	AC: Circuit Protector 16A; ± DC: Fuse 2×16A (T 16A L) for each channel
INPUT CONNECTORS	2×XLR, Stereo Phone Jack 6.3mm
OUTPUT CONNECTORS	Speakon 4-Way and heavy duty Binding Post for each channel
COOLING	2 × Variable Speed DC Fan with Temperature Sensing
FRONT PANEL CONTROLS	2×41 Step Level Attenuators
INDICATORS	Power ON/AC Mains Protection, Signal, Clip, Temperature, Protect (Ch. A & B)
POWER CONSUMPTION (RATED)	5500VA @ 220-240V ~ 50/60Hz
DIMENSIONS	W482 × H104 × D438mm
WEIGHT	22.10kg