
Dual Channel Class D Power Amplifiers

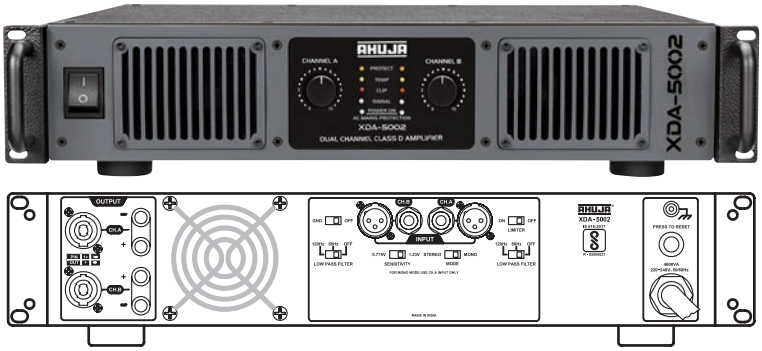


CLASS D | 19" RACK MOUNT

XDA-5002

1800+1800 WATTS ■ AC Operation

- Dual Channel Class D Power Amplifier.
- 1800 + 1800 Watts rated output.
- 80Hz/120Hz Low Pass Filter.
- Built-in Limiter circuit with ON/OFF swtich.
- Toroidal Transformer power supply.
- Two selectable input sensitivities.
- Built-in Amplifier Protection system: DC offset, HF, Short circuit, Thermal, Overload, Overvoltage & Clip Monitoring.
- Compact 2U Size.
- BIS approved.

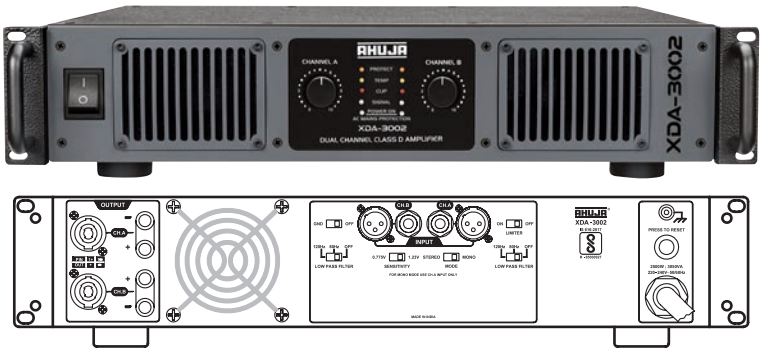

CLASS D | 19" RACK MOUNT

XDA-3002

1200+1200 WATTS ■ AC Operation

- Dual Channel Class D Power Amplifier.
- 1200 + 1200 Watts rated output.
- 80Hz/120Hz Low Pass Filter.
- Built-in Limiter circuit with ON/OFF swtich.
- Toroidal Transformer power supply.
- Two selectable input sensitivities.
- Built-in Amplifier Protection system: DC offset, HF, Short circuit, Thermal, Overload, Overvoltage & Clip Monitoring.
- Compact 2U Size.
- BIS approved.

SPECIFICATIONS	XDA-5002	XDA-3002
CONTINUOUS RATED POWER		
STEREO/MONO	8Ω : 1100W + 1100W RMS, 4Ω : 1800W + 1800W RMS	8Ω : 700W + 700W RMS, 4Ω : 1200W + 1200W RMS
THD + N	< 0.1%	< 0.1%
FREQUENCY RESPONSE (-1dB)	20-20,000Hz	20-20,000Hz
LOW PASS FILTER	80/120Hz @ 24dB per octave	80/120Hz @ 24dB per octave
POWER BANDWIDTH (0.5% THD)	20-20,000Hz	20-20,000Hz
INPUT SENSITIVITY	0dBu (775mV) & 4dBu (1.23V) (Selectable)	0dBu (775mV) & 4dBu (1.23V) (Selectable)
INPUT IMPEDANCE	10k Unbalanced, 20k Balanced	10k Unbalanced, 20k Balanced
SIGNAL TO NOISE RATIO	> 100dB	> 100dB
CHANNEL SEPARATION	> 65dB at 1kHz	> 65dB at 1kHz
DAMPING FACTOR (8Ω)	>1000	>1000
SLEW RATE	20V/µS	20V/µS
PROTECTIONS	Temperature, DC, RFI, Short Circuit, Overload, Overvoltage,	Temperature, DC, RFI, Short Circuit, Overload,
	Built-in Limiter (ON/OFF)	Overvoltage, Built-in Limiter (ON/OFF)
	AC: Circuit Protector 15A;	AC: Circuit Protector 10A;
	± DC: Fuse 2×15A (T 15A L) for each channel	± DC: Fuse 2×10A (T 10A L) for each channel
INPUT CONNECTORS	2×XLR, Stereo Phone Jack 6.3mm	2×XLR, Stereo Phone Jack 6.3mm
OUTPUT CONNECTORS	Speakon 4-Way and heavy duty Binding Post for each channel	Speakon 4-Way and heavy duty Binding Post for each channel
COOLING	2 × Variable Speed DC Fan with Temperature Sensing	2 × Variable Speed DC Fan with Temperature Sensing
FRONT PANEL CONTROLS	2 × 41 Step Level Attenuators	2 × 41 Step Level Attenuators
INDICATORS	Power ON/AC Mains Protection, Signal, Clip,	Power ON/AC Mains Protection, Signal, Clip,
	Temperature, Protect (Ch. A & B)	Temperature, Protect (Ch. A & B)
POWER CONSUMPTION (RATED)	4600VA @ 220-240V ~ 50/60Hz	2500W; 3050VA @ 220-240V ~ 50/60Hz
DIMENSIONS	W482 × H104 × D438mm	W482 × H104 × D438mm
WEIGHT	21.50kg	18.80kg