


PGM-481
Gooseneck Microphone

A sleek and 585 mm (23") long gooseneck condenser microphone with natural and clear sound. Ideal for high end applications like auditoria, conference halls and podiums for VIPs.


- Suitable for use with PGB-48 base and powered by 48V phantom supply model APS-482 or equivalent.

SPECIFICATIONS	
FREQUENCY RESPONSE	50-16,000Hz
SENSITIVITY	5.5mV/Pa
IMPEDANCE	200Ω
POWER REQD.	9V-52V DC
OVERALL LENGTH	585 mm (23")

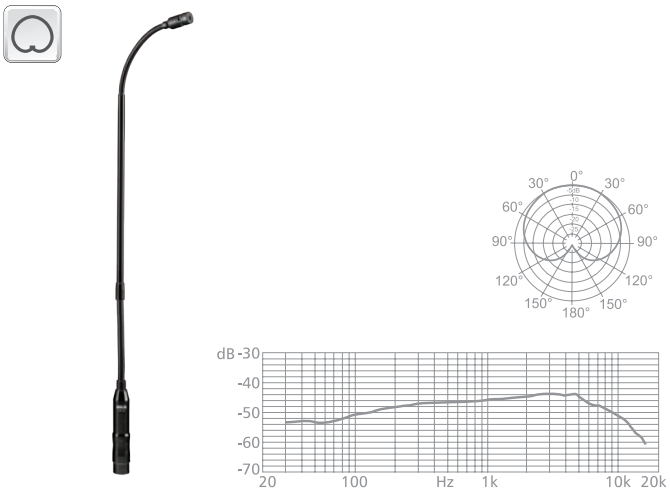

PGB-48
Phantom Gooseneck Microphone Base

- An elegantly designed, sturdy & heavy duty metal base for use with a phantom gooseneck microphone PGM-481 and a suitable 48V phantom supply source APS-482.
- Provided with an ON/OFF switch and LED indication.
- Balanced output allowing longer cable length.

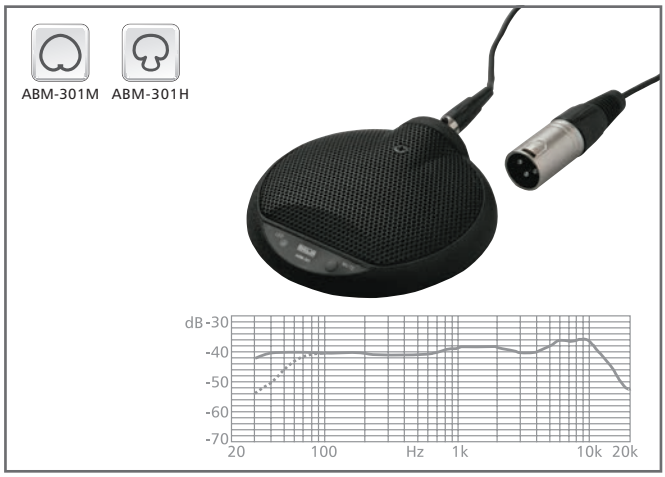

ABM-301M/ABM-301H
Boundary Layer Microphones

Elegantly designed boundary layer microphones for table-top or stage use. Provided with push on/off mute switch, LED indicator, rubber base for reducing shock noise, and a switchable bass filter to eliminate unwanted low frequency noise. Extra smooth wide frequency response and clear, highly intelligible sound. Use with 48V phantom supply. ABM-301M is omnidirectional, and recommended for conference tables, video conferencing etc. ABM-301H is hypercardioid, and recommended for use on stage. Suitable for use with 48V phantom supply APS-482 or equivalent.

SPECIFICATIONS	
FREQUENCY RESPONSE	40-16,000Hz
SENSITIVITY	15mV/Pa
IMPEDANCE	100Ω
BASS FILTER	-10dB at 80Hz
CABLE LENGTH	5.80m
POWER REQUIREMENT	9V-52V DC



APS-482
48V Phantom Supply

High quality, high reliability power supply for use with condenser microphones using 48V DC phantom supply. Fitted with ON/OFF switch, power LED and XLR microphone input and output sockets. Provided with XLR input & output sockets for connecting upto TWO phantom microphones. Suitable for use with microphones PGM-481, ABM-301M and ABM-301H. BIS approved.

SPECIFICATIONS	
OPERATING VOLTAGE	240V AC 50Hz
PHANTOM SUPPLY	48V DC
MIC INPUTS	2 x Female XLR
MIC OUTPUTS	2 x Male XLR (For Amplifier)
COMPLIANCE	IS616:2017 (BIS Certified)
DIMENSIONS	W145 × H60 × D130 mm
WEIGHT	1.10kg