
AMH-402T
40 WATTS




AMH-402T, a 2-way high efficiency, high fidelity PA Music Horn Speaker. It uses a 15.24 cm (6") Kevlar cone woofer and a 2.54 cm (1") phenolic dome tweeter. Thus it combines the high efficiency of a horn with the wide frequency response obtained by using a 2-way woofer tweeter combination. Housed in a beautifully designed UV protected ABS plastic housing, the music horn is weather protected which makes it ideal for outdoor as well as indoor applications.

- Unique concept used to create a well-engineered 2-way PA Music Horn with high efficiency, long throw, and wide frequency response.
- Sound quality of exceptional richness, clarity and fidelity. Ideal for music as well as announcements.
- Rugged & sturdy construction with aesthetically superior finish. UV protected ABS plastic housing.
- Comprises of a highly efficient 15.24 cm (6") Kevlar cone LF driver and a 2.54 cm (1") HF driver for wider frequency response and higher SPL.
- Easy power tap selection on a terminal strip with a 2-core cable. Strong mounting bracket for rigid mounting.
- Ideal for both Indoor and Outdoor applications: Railway Stations, Educational Institutions, Religious Places, Stadiums, Amusement Parks, Factories, Cruise Liners etc.



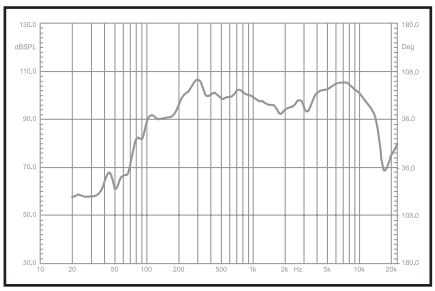

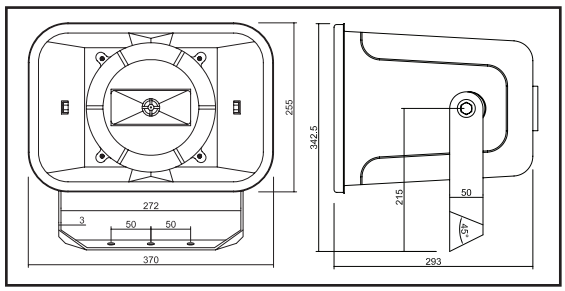

SPECIFICATIONS	AMH-402T
INPUT POWER	40W RMS
POWER TAPS	40/20/10/5W
IMPEDANCE	250/500/1k/2kΩ
FREQUENCY RESPONSE	120-16,000Hz
SPL at 1kHz	98dB/1W/1m; 114dB/40W/1m
DIMENSIONS	W370 × H255 × D300 mm
WEIGHT	5.90kg
MATERIAL	ABS (UV Protected)

PA Horn Speaker for Vehicles

AHC-15 15W/8Ω





- Compact and rugged horn speaker AHC-15 specifically designed for Automobile applications like Siren, Playback of pre-recorded content or real-time reinforcement through microphone.
- Delivers high SPL for a clean intelligible sound and effective penetration.
- Weather proof housing makes AHC-15 versatile to be either mounted on the top of the vehicle or affixed in the hood / bonnet of the vehicle.
- Heavy duty metal bracket offers the most stable and road-worthy mounting arrangement.

SPECIFICATIONS	
INPUT POWER	15W RMS/23W Max.
IMPEDANCE	8Ω
FREQUENCY RESPONSE	300-7,000Hz
SPL at 1kHz	106dB/1W/1m, 118dB/15W/1m
DIMENSIONS	170 x 155 (L157) mm
WEIGHT	1.33kg
MATERIAL	ABS (UV Protected)

