


2 WAY

CSD-5201T

High power 2-way flush mount ceiling speaker for excellent reproduction of both speech and music. Wide frequency response and adjustable tweeter for optimum directivity.

- Operates on 100V line with power taps of 20/10/5W.
- Moulded plastic frame with metal mesh grille.
- Tweeter can be tilted at an angle to focus clear, intelligible sound in the desired direction.
- 12.7 cm (5") woofer and adjustable 2.54 cm (1") tweeter.
- 100V line operation with easy power tap selection through a terminal block.
- Ideal for Hotels··· Office Buildings··· Restaurants··· Hospitals··· Shopping Malls··· Department Stores··· Cinemas··· Gyms···

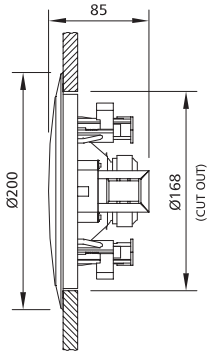




2 WAY

CSD-6303T

High power 2-way flush mount ceiling speaker for excellent reproduction of both speech and music. Wide frequency response and adjustable tweeter for optimum directivity.

- Operates on 100V line with power taps of 30/15/7.5W.
- Moulded plastic frame with metal mesh grille.
- Tweeter can be tilted at an angle to focus clear, intelligible sound in the desired direction.
- 15.24 cm (6") woofer and adjustable 2.54 cm (1") tweeter.
- 100V line operation with easy power tap selection through a terminal block.
- Ideal for Hotels··· Office Buildings··· Restaurants··· Hospitals··· Shopping Malls··· Department Stores··· Cinemas··· Gyms···

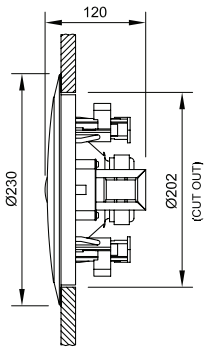




2 WAY

CSD-8401T

High power 2-way flush mount ceiling speaker for excellent reproduction of both speech and music. Adjustable tweeter enables high frequencies to be directed wherever they are most required.

- Operates on 100V line with power taps of 40/20/10W.
- Moulded plastic frame with metal mesh grille.
- Tweeter can be tilted at an angle to focus clear, intelligible sound in the desired direction.
- 20.32 cm (8") woofer and adjustable 2.54 cm (1") tweeter.
- 100V line operation with easy power tap selection through a terminal block.
- Ideal for Hotels··· Office Buildings··· Restaurants··· Hospitals··· Shopping Malls··· Department Stores··· Cinemas··· Gyms···

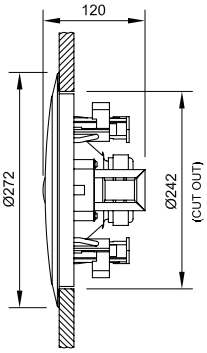

SPECIFICATIONS	CSD-5201T	CSD-6303T	CSD-8401T
INPUT POWER	20W RMS	30W RMS	40W RMS
POWER TAPS ON 100V	20/10/5W	30/15/7.5W	40/20/10W
IMPEDANCE	500/1k/2kΩ	330/670/1.33kΩ	250/500/1kΩ
FREQUENCY RESPONSE	90-18,000Hz	90-18,000Hz	90-18,000Hz
SPL at 1kHz (1W/1m)	91dB	92dB	93dB
SPEAKER	Woofer 127 mm (5")	Woofer 150 mm (6")	Woofer 203 mm (8")
	Tweeter 25 mm (1")	Tweeter 25 mm (1")	Tweeter 25 mm (1")
DIMENSIONS	Ø200 × H85 mm	Ø230 × H120 mm	Ø272 × H120 mm
WEIGHT	1.36kg	1.65kg	2.10kg