
High quality 12" mid-bass speaker



AS12-X100®
100 WATTS

- Sturdy pressed metal frame in elegant brown colour.
- Kapton former voice coil for withstanding high temperature.
- Suitable for use in compact 2-way sealed as well as bass reflex enclosures.
- Excellent low frequency response makes it ideal for Dandiya-Ras, DJs & General PA applications.

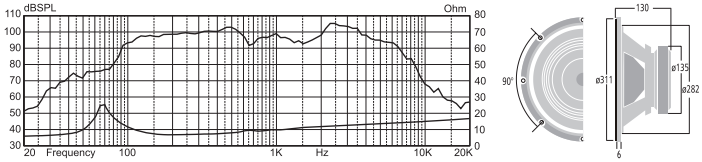


High quality 15" mid-bass speaker



AS15-X200®
200 WATTS

- Sturdy pressed metal frame in elegant brown colour.
- Special high temperature voice coil for exceptional thermal capabilities.
- Suitable for use in compact 2-way sealed as well as bass reflex enclosures.
- Excellent low frequency response makes it ideal for Dandiya-Ras, DJs & General PA applications.

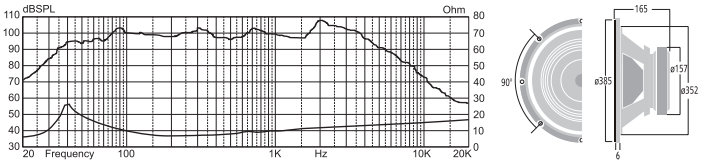

SPECIFICATIONS		AS12-X100®	AS15-X200®
POWER RATING		100W RMS/200W Programme	200W RMS/400W Programme
NOMINAL DIAMETER		305 mm (12")	380 mm (15")
NOMINAL IMPEDANCE		8Ω	8Ω
SENSITIVITY (1W/1m)		97dB	98dB
MAGNET WEIGHT		1.1kg	1.54kg
RESONANT FREQUENCY	(Fs)	70Hz	45Hz
DC RESISTANCE	(Re)	6.0Ω	6.0Ω
ELECTROMAGNETIC Q	(Qes)	0.79	0.58
MECHANICAL Q	(Qms)	5.5	9.6
TOTAL Q	(Qts)	0.69	0.54
COMPLIANCE EQUIVALENT VOLUME	(VAS)	74.23 Litr	115 Litr
SURFACE AREA OF CONE	(Sd)	510cm²	830cm²
REFERENCE EFFICIENCY	(ηo)	3.09%	2.1%
VOICE COIL		1.5"	2.0"
OVERHANG	(Xmax)	2.0mm	3.5 mm
MOVING MASS	(Mms)	25.5gm	73gm
BL PRODUCT	(BL)	9.2TM	13.4TM
OVERALL DIAMETER		311 mm	385 mm
DEPTH		130 mm	165 mm
BAFFLE HOLE DIAMETER		285 mm	355 mm
BOLT MOUNT DIAMETER	(PCD)	292 mm (8 Bolts)	373 mm (8 Bolts)
WEIGHT		3.20kg	4.90kg