
High efficiency 12″ dual cone full range speaker

SK-12FR®X/SK-12FR®Z

100 WATTS



- They are 30.48cm (12") dual cone full range PA speakers with a very wide frequency range 50-16,000Hz.
- Impedance of SK-12FRX is 8Ω and SK-12FRZ is 16Ω.
- High quality specially designed imported parts for low distortion and a clean transparent sound.

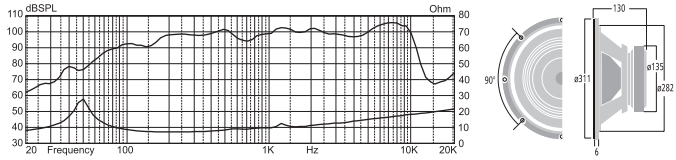


High efficiency 12″ dual cone full range speaker

DX12-F200®/DZ12-F200®

200 WATTS



- 30.48cm (12″) dual cone speaker with wide spectrum frequency response.
- High quality specially designed imported cones and spider for extremely clear, low distortion sound reproduction.
- Impedance of DX12-F200 is 8Ω and DZ12-F200 is 16Ω.
- 5.08 cm (2″) CCAW voice coil with high temperature rating for safe, reliable operation.

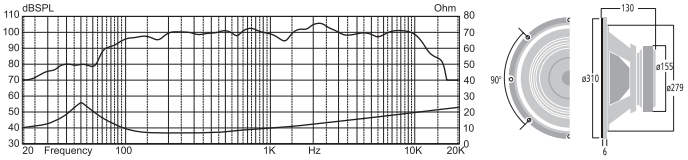


High efficiency 15″ dual cone full range speaker

SK-15FR®X/SK-15FR®Z

200 WATTS



- It is a 38.1 cm (15") high quality dual cone full range PA speaker with a very wide frequency range 50-16,000Hz.
- Impedance of SK-15FRX is 8Ω and SK-15FRZ is 16Ω.
- High quality specially designed imported parts for low distortion & clean sound.

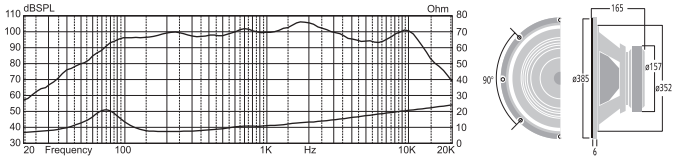

SPECIFICATIONS		SK-12FR®X/SK-12FR®Z	DX12-F200®/DZ12-F200®	SK-15FR®X/SK-15FR®Z
POWER RATING		100W RMS/200W Programme	200W RMS/400W Programme	200W RMS/400W Programme
NOMINAL DIAMETER		305 mm (12″)	305 mm (12″)	380 mm (15″)
NOMINAL IMPEDANCE		8 Ω /16 Ω	8 Ω /16 Ω	8 Ω/16 Ω
SENSITIVITY (1W/1m)		97dB	97dB	98 dB
MAGNET WEIGHT		1.1kg	1.16kg	1.54kg
RESONANT FREQUENCY	(Fs)	50Hz	50Hz	75Hz
DC RESISTANCE	(Re)	6.4 Ω/13.0Ω	6.8Ω/13.0Ω	6.5 Ω/11.0Ω
ELECTROMAGNETIC Q	(Qes)	0.758	0.92	0.91
MECHANICAL Q	(Qms)	9.36	3.26	5.07
TOTAL Q	(Qts)	0.7	0.72	0.77
COMPLIANCE EQUIVALENT VOLUME	(VAS)	104 Litr	—	75.11Litr
SURFACE AREA OF CONE	(Sd)	510cm²	510cm²	830cm²
REFERENCE EFFICIENCY	(ηo)	1.7%	3.6%	3.18%
VOICE COIL DIAMETER		1.5″	2.0″	2.0″
OVERHANG	(Xmax)	1.5 mm	2.5 mm	4.0 mm
MOVING MASS	(Mms)	35.23gm	36.7gm	60.62gm
BL PRODUCT	(BL)	9.7TM	11.2TM	14.23TM
COIL INDUCTANCE	(Le)	0.79mH	0.69mH	0.78mH
OVERALL DIAMETER		311 mm	313 mm	385 mm
DEPTH		130 mm	127 mm	165 mm
BAFFLE HOLE DIAMETER		285 mm	285 mm	355 mm
BOLT MOUNT DIAMETER	(PCD)	292 mm (8 Bolts)	295 mm (8 Bolts)	373 mm (8 Bolts)
WEIGHT		3.20kg	4.16kg	4.90kg



