
Medium power 12″ low frequency speaker



L12-MB200®

200 WATTS

- Specially designed for use in medium power compact 2-Way speaker systems. Suitable for bass-midrange and monitoring applications.
- Robust steel frame and plasticized cloth edge composite cone.
- KAPTON former 5.08 cm (2.0″) copper voice coil for withstanding high temperatures.

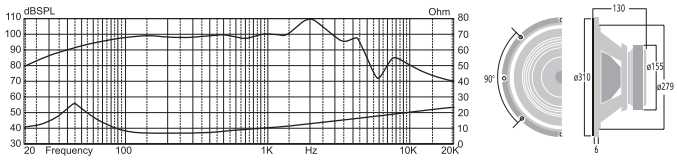


High power 12″ low frequency speaker



L12-MB300

300 WATTS

- Exclusively designed for use in high power compact 2-Way speaker systems. Ideal for bass & midrange application in bass reflex cabinets.
- Strong die-cast aluminium frame for reliable performance.
- 7.62 cm (3″) Copper Clad Aluminium Wire voice coil wound on GLASS FIBRE former. Gold plated push type heavy duty terminals for firm connection.

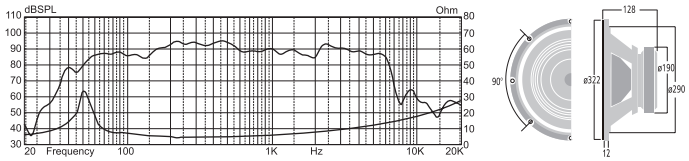


High power 12″ low frequency speaker



L12-MB400

400 WATTS

- Suitable for use in high power compact 2-Way speaker systems. Ideal for bass & midrange application in bass reflex cabinets.
- Strong die-cast aluminium frame for reliable performance.
- 7.62 cm (3″) Copper Clad Aluminium Wire voice coil wound on GLASS FIBRE former. Gold plated push type heavy duty terminals for firm connection.

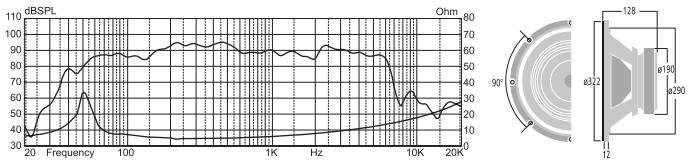

SPECIFICATIONS		L12-MB200®	L12-MB300	L12-MB400
POWER RATING		200W RMS/400W Programme	300W RMS/600W Programme	400W RMS/800W Programme
NOMINAL DIAMETER		305 mm (12″)	305 mm (12″)	305 mm (12″)
NOMINAL IMPEDANCE		8Ω	8Ω	8Ω
SENSITIVITY (1W/1m)		97dB	99dB	99dB
MAGNET WEIGHT		1.16 Kg	2.31kg	2.31kg
RESONANT FREQUENCY	(Fs)	45Hz	48Hz	48Hz
DC RESISTANCE	(Re)	7Ω	5.4Ω	5.4Ω
ELECTROMAGNETIC Q	(Qes)	0.46	0.33	0.33
MECHANICAL Q	(Qms)	4.67	4.94	4.94
TOTAL Q	(Qts)	0.42	0.30	0.30
COMPLIANCE EQUIVALENT VOLUME	(VAS)	135Litr	71Litr	71Litr
SURFACE AREA OF CONE	(Sd)	510cm²	531cm²	531cm²
REFERENCE EFFICIENCY	(ηo)	1.35%	2.83%	2.83%
VOICE COIL		2.0″	3.0″	3.0″
OVERHANG	(Xmax)	2.5mm	3.5 mm	3.5 mm
MOVING MASS	(Mms)	51.9gm	54.55gm	54.55gm
BL PRODUCT	(BL)	13.42TM	17.11TM	17.11TM
COIL INDUCTANCE	(Le)	0.89mH	0.85mH	0.85mH
OVERALL DIAMETER		313 mm	322 mm	322 mm
DEPTH		127 mm	128 mm	128 mm
BAFFLE HOLE DIAMETER		285 mm	290 mm	290 mm
BOLT MOUNT DIAMETER	(PCD)	295 mm (8 Bolts)	305 mm (8 Bolts)	305 mm (8 Bolts)
WEIGHT		4.16kg	7.30kg	7.30kg