
High power 15″ low frequency speaker



L15-MB300®

300 WATTS

- Excellent low and mid frequency response, Ideal for bass and bass-midrange applications in bass reflex cabinets.
- Aluminium die-cast frame with vented-gap cooling technique.
- 7.62 cm (3″) CCAW voice coil wound on GLASS FIBRE former.
- Gold plated push type heavy duty terminals for firm connection.

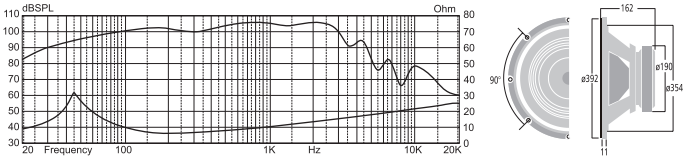


High power 15″ low frequency speaker



L15-MB400®

400 WATTS

- Excellent low and mid frequency response.
- Ideal for high power 2-Way Speaker Systems.
- Triple roll, exponential cone geometry.
- High temperature copper clad aluminium wire voice coil wound on polyamide former.

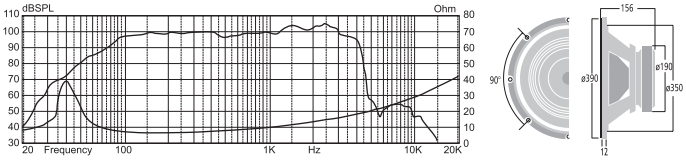


High power 15″ low frequency speaker



L15-MB550

550 WATTS

- Extended low frequency, ideal for Cinema Halls and for use in professional high power full range speaker systems.
- Aluminium die-cast frame with gold plated push type heavy duty terminals.
- GLASS FIBRE former for withstanding high temperature.
- 10.16 cm (4″) Edge-wound aluminium wire voice coil for higher SPL.

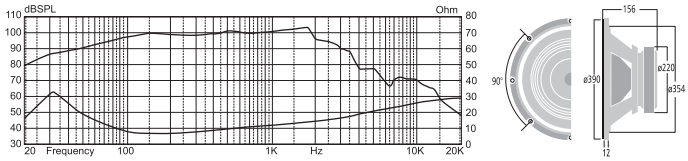

SPECIFICATIONS		L15-MB300®	L15-MB400®	L15-MB550
POWER RATING		300W RMS/600W Programme	400W RMS/800W Programme	550W RMS/1100W Programme
NOMINAL DIAMETER		380 mm (15″)	380 mm (15″)	380 mm (15″)
NOMINAL IMPEDANCE		8Ω	8Ω	8Ω
SENSITIVITY (1W/1m)		99dB	99dB	97dB
MAGNET WEIGHT		2.31kg	2.31kg	2.85kg
RESONANT FREQUENCY	(Fs)	45Hz	40Hz	33Hz
DC RESISTANCE	(Re)	5.7Ω	5.8Ω	5Ω
ELECTROMAGNETIC Q	(Qes)	0.32	0.41	0.34
MECHANICAL Q	(Qms)	5.82	8.0	4.32
TOTAL Q	(Qts)	0.3	0.39	0.32
COMPLIANCE EQUIVALENT VOLUME	(VAS)	139.65Litr	168Litr	221Litr
SURFACE AREA OF CONE	(Sd)	830cm²	855cm²	830cm²
REFERENCE EFFICIENCY	(ηo)	4.35%	2.72%	2.28%
VOICE COIL		3.0″	3.0″	4.0″
OVERHANG	(Xmax)	2.5mm	6.0mm	8.0 mm
MOVING MASS	(Mms)	80.31gm	91gm	107.17gm
BL PRODUCT	(BL)	20.49TM	18TM	18TM
COIL INDUCTANCE	(Le)	0.68mH	1.1mH	1.09mH
OVERALL DIAMETER		395 mm	389.5 mm	387 mm
DEPTH		160 mm	157 mm	158 mm
BAFFLE HOLE DIAMETER		358 mm	350 mm	354 mm
BOLT MOUNT DIAMETER	(PCD)	373 mm (8 Bolts)	369 mm (8 Bolts)	369 mm (8 Bolts)
WEIGHT		8.15kg	7.80kg	9.00kg



