
Super power 18"
extended low frequency speaker



L18-SW1000®
1000 WATTS

- Super power and reliable speaker for powerful bass & subwoofer applications.
- Robust aluminium die-cast frame with efficient heat dissipating vents. Aluminium demodulating ring for enhanced heat dissipation.
- DOUBLE SPIDER design for better excursion control. GLASS FIBRE former voice coil for withstanding high temperatures.
- 12.7 cm (5") INSIDE/OUTSIDE CCAW voice coil for higher SPL.
- Cone specially treated for water splash resistance.

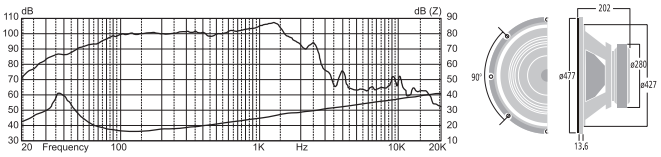


Super power 18"
extended low frequency speaker



THUNDER 1845
1300 WATTS

- Powerful & efficient speaker with Extended Low Frequency Response.
- For use in Professional High Power sub-woofer Speaker Systems.
- 11.43cm (4.5") I/O copper voice coil for higher efficiency.
- Vented Aluminium Die-cast frame with built-in heat sink for enchanced heat dissipation.
- Higher grade and heavy duty ferrite magnet in rigid assembly.
- Composite treated cone paper for better strength and reliability.
- Heavy duty push type terminals for easy and firm connection.

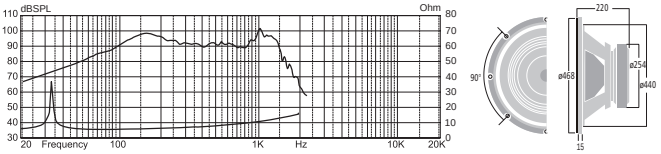

SPECIFICATIONS		L18-SW1000®	THUNDER 1845
POWER RATING		1000W RMS/2000W Programme	1300W RMS/2600W Programme
NOMINAL DIAMETER		460 mm (18")	460 mm (18")
NOMINAL IMPEDANCE		8Ω	8Ω
SENSITIVITY (1W/1m)		99dB	97dB
MAGNET WEIGHT		5.65kg	4.85kg
RESONANT FREQUENCY	(Fs)	36Hz	36Hz
DC RESISTANCE	(Re)	5.6Ω	4.8Ω
ELECTROMAGNETIC Q	(Qes)	0.32	0.360
MECHANICAL Q	(Qms)	14.70	25.4
TOTAL Q	(Qts)	0.31	0.355
COMPLIANCE EQUIVALENT VOLUME	(VAS)	249 Litr	142.8 Litr
SURFACE AREA OF CONE	(Sd)	1257cm²	1219cm²
REFERENCE EFFICIENCY	(ηo)	3.6%	1.8%
VOICE COIL		5.0"	4.5"
OVERHANG	(Xmax)	8.0 mm	9.4mm
MOVING MASS	(Mms)	169gm	283.2gm
BL PRODUCT	(BL)	26.0TM	29.5TM
COIL INDUCTANCE	(Le)	1.91mH	1.07mH
OVERALL DIAMETER		477 mm	468 mm
DEPTH		202 mm	220 mm
BAFFLE HOLE DIAMETER		427 mm	440 mm
BOLT MOUNT DIAMETER	(PCD)	451.5 mm (8 Bolts)	448 mm (8 Bolts)
WEIGHT		19.60kg	17.43kg

