
Super power 18"
extended low frequency speaker



L18-SW1500
1500 WATTS

- Super power & efficient speaker with Extended Low Frequency Response.
- For use in Professional High Power sub-woofer Speaker Systems.
- 12.7cm (5") I/O copper voice coil for higher efficiency.
- Vented Aluminium Die-cast frame with built-in heat sink for enchanced heat dissipation.
- Higher grade and heavy duty ferrite magnet in rigid assembly.
- Double spider design for better excursion control.
- Composite treated cone paper for better strength and reliability.
- Heavy duty push type terminals for easy and firm connection.

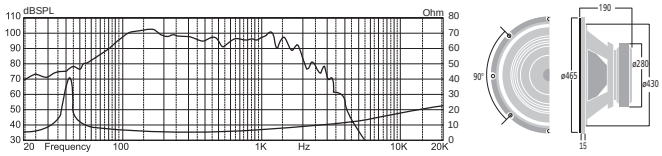


Super power 18"
extended low frequency speaker



L18-SW2000
2000 WATTS

- Strong & Powerful Speaker with Extended Low Frequency Response.
- For use in Professional High Power sub-woofer Speaker Systems.
- 12.7cm (5") I/O copper voice coil for higher efficiency.
- Vented Aluminium Die-cast frame with built-in heat sink for enchanced heat dissipation.
- Higher grade and heavy duty dual ferrite magnet in rigid assembly.
- Double spider design for better excursion control.
- Composite treated cone paper for better strength and reliability.
- Heavy duty push type terminals for easy and firm connection.

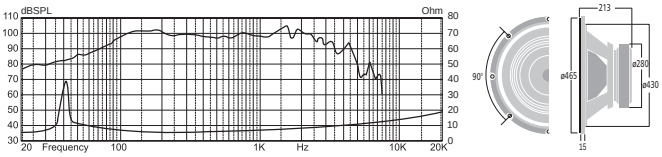

SPECIFICATIONS		L18-SW1500	L18-SW2000
POWER RATING		1500W RMS/3000W Programme	2000W RMS/4000W Programme
NOMINAL DIAMETER		460 mm (18")	460 mm (18")
NOMINAL IMPEDANCE		8Ω	8Ω
SENSITIVITY (1W/1m)		98dB	98dB
MAGNET WEIGHT		5.65kg	9.04kg
RESONANT FREQUENCY	(Fs)	40Hz	40Hz
DC RESISTANCE	(Re)	5.6Ω	5.6Ω
ELECTROMAGNETIC Q	(Qes)	0.362	0.215
MECHANICAL Q	(Qms)	9.61	10.63
TOTAL Q	(Qts)	0.293	0.211
COMPLIANCE EQUIVALENT VOLUME	(VAS)	158 Litr	144.4 Litr
SURFACE AREA OF CONE	(Sd)	1288cm²	1288cm²
REFERENCE EFFICIENCY	(ηo)	3.1%	4.05%
VOICE COIL		5.0"	5.0"
OVERHANG	(Xmax)	9.6mm	10.9 mm
MOVING MASS	(Mms)	236gm	256.32gm
BL PRODUCT	(BL)	33.0TM	40.79TM
COIL INDUCTANCE	(Le)	3.92mH	2.65mH
OVERALL DIAMETER		465 mm	465 mm
DEPTH		190 mm	213 mm
BAFFLE HOLE DIAMETER		430 mm	430 mm
BOLT MOUNT DIAMETER	(PCD)	442 mm (8 Bolts)	442 mm (8 Bolts)
WEIGHT		20.00kg	24.50kg