
Super power 18"
extended low frequency speaker



L18-SW2500
2500 WATTS

- Powerful & Rugged Speaker with Extended Low Frequency Response.
- For use in Professional High Power sub-woofer Speaker Systems.
- 12.7cm (5") I/O copper voice coil for higher efficiency.
- Vented Aluminium Die-cast frame with built-in heat sink for enchanced heat dissipation.
- Higher grade and heavy duty dual ferrite magnet in rigid assembly.
- Double spider design for better excursion control.
- Composite treated cone paper for better strength and reliability.
- Heavy duty push type terminals for easy and firm connection.

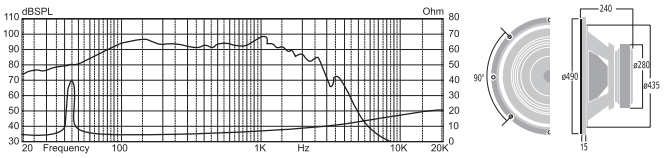


Super power 21"
extended low frequency speaker



L21-SW3500
3500 WATTS

- Highly Powerful & Efficient Speaker with Extended Low Frequency Response.
- For use in Professional Very High Power Sub-Woofer Speaker Systems.
- 15.24cm (6") I/O copper voice coil for efficient and reliable performance.
- Vented Aluminium Die-cast frame and robust construction.
- Heavy duty dual ferrite magnet with rigid magnet assembly.
- Composite treated cone paper with plasticized cloth cone edge for extra strength and reliability.
- Glass Fibre former voice coil for withstanding high temperature.
- Chrome plated push type heavy duty terminals for reliable connection.

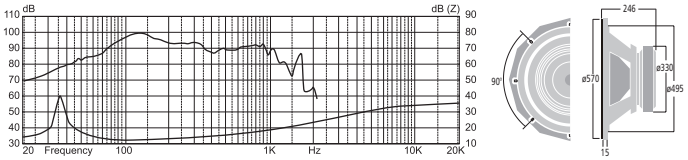

SPECIFICATIONS		L18-SW2500	L21-SW3500
POWER RATING		2500W RMS/5000W Programme	3500W RMS/7000W Programme
NOMINAL DIAMETER		460 mm (18")	533 mm (21")
NOMINAL IMPEDANCE		8Ω	8Ω
SENSITIVITY (1W/1m)		97dB	98dB
MAGNET WEIGHT		9.04kg	
RESONANT FREQUENCY	(Fs)	45Hz	35Hz
DC RESISTANCE	(Re)	5.6Ω	5.6Ω
ELECTROMAGNETIC Q	(Qes)	0.26	0.183
MECHANICAL Q	(Qms)	8.90	6.52
TOTAL Q	(Qts)	0.25	0.178
COMPLIANCE EQUIVALENT VOLUME	(VAS)	86.10 Litr	169 Litr
SURFACE AREA OF CONE	(Sd)	1225cm²	1735cm²
REFERENCE EFFICIENCY	(ηo)	2.98%	4.11%
VOICE COIL		5.0"	6.0"
OVERHANG	(Xmax)	10.9mm	8.35 mm
MOVING MASS	(Mms)	298.7gm	487.23gm
BL PRODUCT	(BL)	42.88TM	57.96TM
COIL INDUCTANCE	(Le)	2.74mH	5.50mH
OVERALL DIAMETER		466 mm	573 ×555 mm
DEPTH		240 mm	246 mm
BAFFLE HOLE DIAMETER		420 mm	498 mm
BOLT MOUNT DIAMETER	(PCD)	445 mm (8 Bolts)	550 ×520 mm
WEIGHT		25.10kg	36.80kg



