
High power 12″ low frequency speaker



N12-MB600X

600 WATTS

- High power Neodymium speaker for a variety of bass and mid range applications.
- Robust aluminium die-cast frame with heavy duty push terminals.
- 8.90 cm (3.5") CCAW I/O voice coil wound on Glass Fibre former to withstand high temperature.

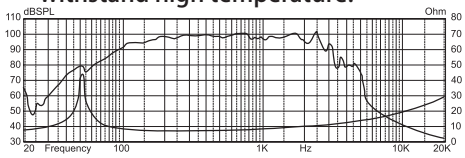


High power 12″ low frequency speaker



N12-MB600Z

600 WATTS

- High power Neodymium speaker for a variety of bass and mid range applications.
- Robust aluminium die-cast frame with heavy duty push terminals.
- 8.90 cm (3.5") Copper I/O voice coil wound on Glass Fibre former to withstand high temperature.

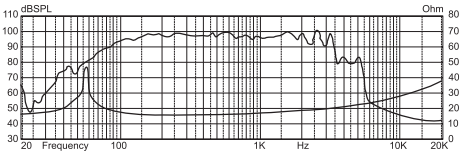


Super power 18″ extended low frequency speaker



N18-SW1800

1800 WATTS

- Powerful and efficient Neodymium speaker with extended low frequency response.
- Robust aluminium die-cast frame with vents for efficient heat dissipation.
- 11.43 cm (4.5") Aluminium I/O voice coil wound on Glass Fibre former to withstand high temperature.

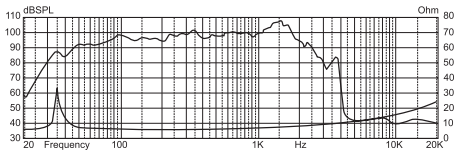

SPECIFICATIONS		N12-MB600X	N12-MB600Z	N18-SW1800
POWER RATING		600W RMS/1200W Programme	600W RMS/1200W Programme	1800W RMS/3600W Programme
NOMINAL DIAMETER		305 mm (12″)	305 mm (12″)	460 mm (18″)
NOMINAL IMPEDANCE		8Ω	16Ω	8Ω
SENSITIVITY (1W/1m)		98dB	97dB	99dB
RESONANT FREQUENCY	(Fs)	52Hz	58Hz	35Hz
DC RESISTANCE	(Re)	7.18Ω	14.52Ω	5.6Ω
ELECTROMAGNETIC Q	(Qes)	0.27	0.45	0.22
MECHANICAL Q	(Qms)	10.6	11.9	14.63
TOTAL Q	(Qts)	0.26	0.43	0.21
COMPLIANCE EQUIVALENT VOLUME	(VAS)	47.60Litr	50Litr	330Litr
SURFACE AREA OF CONE	(Sd)	564cm²	564cm²	1288cm²
REFERENCE EFFICIENCY	(ηo)	2.66%	2.11%	4.88%
VOICE COIL		3.5″	3.5″	4.5″
OVERHANG	(Xmax)	7.0 mm	7.0 mm	18.0 mm
MOVING MASS	(Mms)	76.80gm	66.25gm	170.6gm
BL PRODUCT	(BL)	22.18TM	25.41TM	28.6TM
COIL INDUCTANCE	(Le)	1.27mH	2.07mH	1.82mH
OVERALL DIAMETER		315.50 mm	315.50 mm	462 mm
DEPTH		140 mm	140 mm	255 mm
BAFFLE HOLE DIAMETER		283 mm	283 mm	428 mm
BOLT MOUNT DIAMETER	(PCD)	299 mm (8 Bolts)	299 mm (8 Bolts)	446 mm (8 Bolts)
WEIGHT		4.00kg	4.00kg	12.40kg