
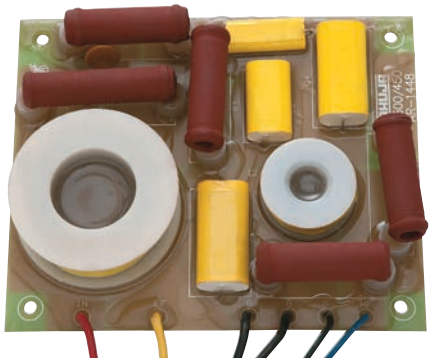



C-500/450 500W RMS

- Professional 2-Way Passive Crossover Network.
- Designed for use with 1no. LF woofer AHUJA model L15-MB400, L15-MB550 or L12-MB400.
- HF driver HD44-60T or HD51-80T.
- PTC for HF protection.
- High power and Low resistance Air core coils.
- High quality metallised polyester capacitors.

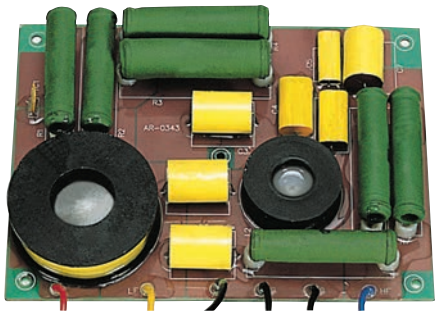


C-500/750 500W RMS

- Professional 2-Way Passive Crossover Network.
- Designed for use with 1 no. LF woofer AHUJA Model L15-MB550 or L12-MB400.
- HF driver HD74-120.
- PTC for HF protection.
- High power and Low resistance Air core coils.
- High quality metallised polyester capacitors.

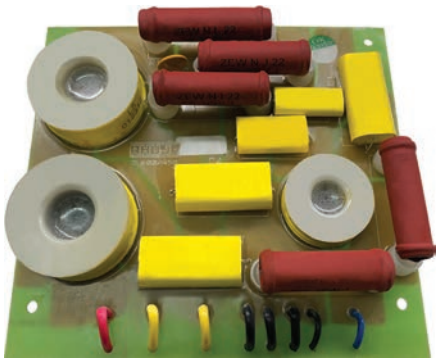

C-600/450 600W RMS

- Professional 2-Way Passive Crossover Network.
- Designed for use with 2 nos. LF woofer AHUJA Model L15-MB300 or L12-MB300.
- HF driver HD51-80T or HD74-120.
- PTC for HF protection.
- High power and Low resistance Air core coils.
- High quality metallised polyester capacitors.

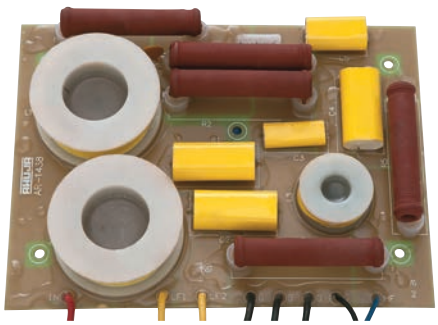

C-1000/450 1000W RMS

- Professional 2-Way Passive Crossover Network.
- Designed for use with 2 nos. LF woofer AHUJA model L15-MB400, L15-MB550 or L12-MB400.
- HF driver HD51-80T.
- PTC for HF protection.
- High power and Low resistance Air core coils.
- High quality metallised polyester capacitors.

SPECIFICATIONS	C-500/450	C-500/750	C-600/450	C-1000/450
TYPE	Two-Way Crossover	Two-Way Crossover	Two-Way Crossover	Two-Way Crossover
POWER CAPACITY	500W	500W	600W	1000W
CROSSOVER FREQUENCY	2.5kHz	1.2kHz	2.5kHz	2.5kHz
NOMINAL IMPEDANCE	8Ω	8Ω	4Ω	4Ω
LOW PASS FILTER SLOPE	12dB/Octave	12dB/Octave	12dB/Octave	12dB/Octave
HIGH PASS FILTER SLOPE	18dB/Octave with protection	18dB/Octave with protection	18dB/Octave with protection	18dB/Octave with protection
DIMENSIONS	W170 x H32 x D140 mm	W225 x H35 x D169 mm	W180 × H32 × D150 mm	W220 × H35 × D166 mm
WEIGHT	625g	1.11kg	805g	1.01kg