
NEW/TECH™

Double Outlet Type
Landing Valve Type–B

IS : 5290
CM/L3092450


NS-EN ISO 9001:2008
QMS ISO 9001:2008

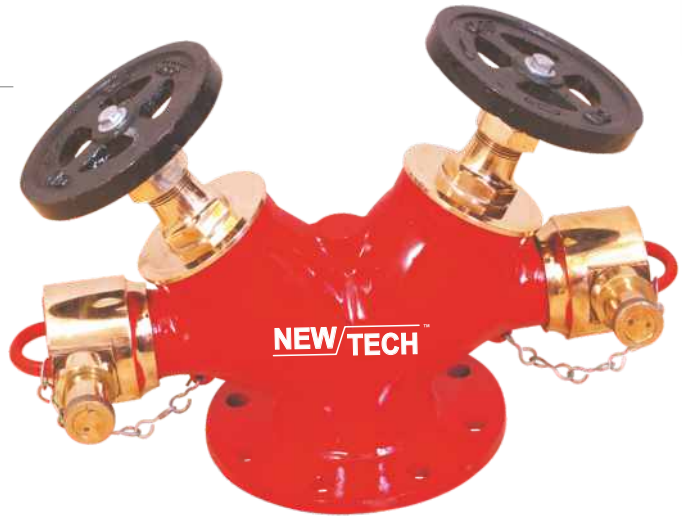

Gun Metal

Body, Bonnet Assembly : LTB2–IS:318
Valve Spindle : Brass Rod –IS : 319/320
Cast Iron Wheel : IS 210
Rubber Washer : IS 937 TYPE– (A)
Spring : Phosphoreus Wire : IS:7608
Gland Packing : Asbestos Thread : IS 4687
Approval : ISI Marked from Burea of Indian Standards, (63mm)

Hydraulic Pressure Test
Performance : 21 Kg.f/cm²
Tightness : 14Kg.f/cm²
Flow Test : Satisfactory at 7Kgf/cm²

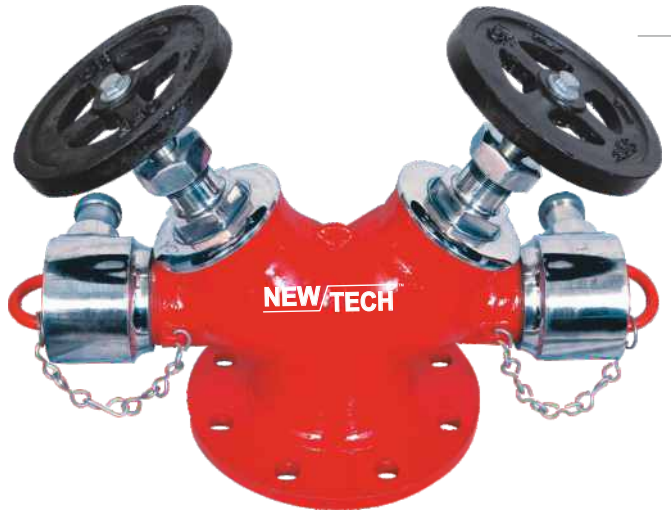

Stainless Steel

Body, Bonnet Assembly : Stainless Steel –IS : 3444
Valve Spindle : Stainless Steel –IS : 6603
Cast Iron Wheel : IS : 210
Rubber Washer : IS : 937 (TYPE–A)
Spring : Stainless Steel : IS : 6528
Gland Packing : Asbestor Thread : IS : 4687
Approval : ISI Marked from Burea of Indian Standards, (63mm)

Hydraulic Pressure Test
Performance : 21 Kg.f/cm2
Tightness : 14Kg.f/cm2
Flow Test : Satisfactory at 7Kgf/cm2