CAST IRON NON-RETURN VALVE SWING TYPE (Reflux Valve)





Sizes		Dimensions			
mm	Inch.	L	H	T	D
50	2"	203	130	16	165
65	2½"	216	142	16	185
80	3"	241	160	21	200
100	4"	292	180	22	220
125	5"	330	212	22.5	250
150	6"	356	220	23	285
200	8"	495	260	24.5	340
250	10"	622	350	26	395
300	12"	698	----	27.5	445

Parts Name	Material	Specifications
Body, Cover & Hinge	Cast Iron	IS 210 FG 200
Body Seat Ring	Bronze	IS 318 Gr. LTB 2
Disc	Cast Iron	IS 210 FG 200
Disc Face Ring	Rubber	IS 638 Type B
Hinge Pin	Stainless Steel	IS 7604
Washer	Carbon Steel	IS 1363
Side Plug	M.I.	
Gasket	Rubber	IS 638 Type B
Stud & Nuts	Carbon Steel	IS 1363


- [x] water
- [ ] air
- [ ] steam
- [x] oil
- [ ] gases

Test Pressure (Hydrostatic)
Seat : 1.6 Mpa
Shell : 2.4 Mpa

IS:5312, PART-1 Flanged ends as per IS-1538

BUTTERFLY VALVE



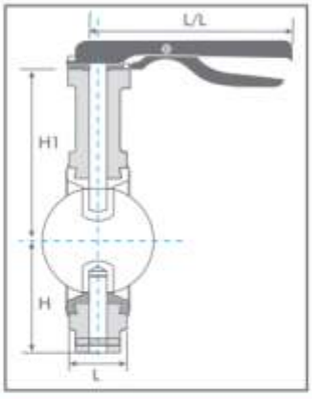

Sizes		Dimensions				
mm	Inch.	L	H	H1	L/L	
40	1½"	33	55	100	180	
50	2"	43	63	126	180	
65	2½"	46	70	140	265	
80	3"	46	78	135	265	
100	4"	52	90	144	265	
125	5"	56	110	160	265	
150	6"	56	120	180	265	
200	8"	60	160	220		
250	10"	68	210	265		GEAR OPERATED
300	12"	78	240	290		

Parts Name	Material	Specifications
Body	Cast Iron	IS 210 FG 200
Bush	PTFE	BSEN 12086
Disc	S.G. Iron/Stainless Steel	ASTM A 536
Liner	EPDM/Linear	IS 5192-1
Lock Plate	Carbon Steel	IS 2062
Bolts & Nuts	Carbon Steel	IS 1367
Lever & Lever Lock Screw	Carbon Steel	BS 960
Upper & Lower Stem	Stainless Steel	IS 7604
Dowel Pin	Carbon Steel	BS 1574

- [x] water
- [ ] air
- [ ] steam
- [x] oil
- [ ] gases

Test Pressure (Hydrostatic)
Seat : 1.6 Mpa.
Body : 2.4 Mpa

CLASS-125, PN 1.0/1.6 Mpa
Working Temperature 90°