
FORGED BRASS BALL VALVES



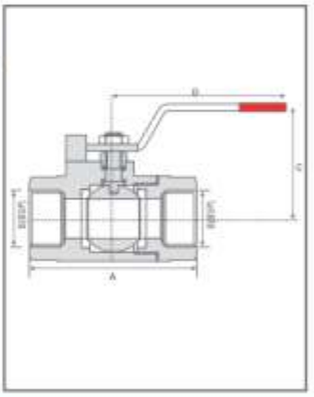

Sizes		Dimensions			
Inch.	mm	A	B	C	D
1/4''	8	45	1/4	45	84
3/8''	10	47	3/8	48	84
1/2''	15	50	1/2	52	91
3/4''	20	57	3/4	56	115
1''	25	65	1	62	115
1¼''	32	74	1¼	71	128
1½''	40	82	1½	82	150
2''	50	103	2	89	155
2½'	65	124	2½	121	240
3''	80	145	3	132	242
4''	100	175	4	156	243

Parts Name	Material	Specifications
Ball	Forzed Brass	IS-6912
Body	Forzed Brass	IS-6912
Bonnet	Forzed Brass	IS-6912
Disc	PTFE	--------
Gland Packing	PTFE	--------
Gland Nut	Forged Brass	IS-6912
Handle	M.S.	IS-2062
Nut	M.S.	IS-1363
Stem	Forged Brass	IS-6912
Washer	Steel	----------


- ☑ water
- ☑ air
- ☐ steam
- ☑ oil
- ☐ gases

Test Pressure : Hydrostatic 25 Kg/cm² Lever Operated, Quarter Turn

Screwed Female Ends as per IS : 554/BS:21/ISO:7

Pressure Reducing Valves



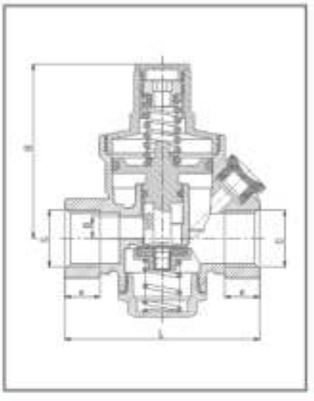

Sizes	Dimensions			
DN	L	B	H	S
15	71	8	92	13
20	74	10	92	13.5
25	76	14.5	94	16
32	82	15	103.5	15.5
40	90	19	125	18
50	104	20	141.5	18

Parts Name	Material	Specifications
Body, Bonnet	Forges Brass	IS-6912 Gr. FLB
Piston, Disc Holder	Forges Brass	IS-6912 Gr. FLB
Caps	Forges Brass	IS-6912 Gr. FLB
O Rings	Nitrile Rubber	-------
Spring	Steel	EN47, Gr B
Pressure Setting Ring	Forged Brass	IS : 6912 Gr FLB
Strainer	Stainless Steel	SS 304
Disc	Nitrile Rubber	

- ☑ water
- ☐ air
- ☐ steam
- ☐ oil
- ☐ gases

Test Pressure : 1.6 Mpa
No External Stainer required as NVR PRV has inbuilt Stainers

Screwed Female Ends as per BSP
Working Temperature - 80°C