
CAST IRON 'Y' TYPE STRAINER (Screwed)



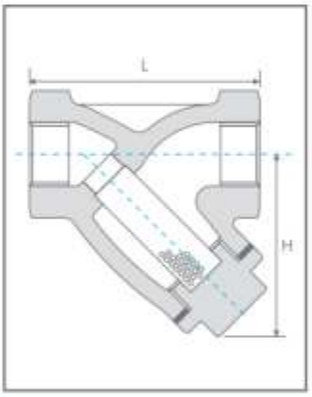

Sizes		Dimensions		BSP
mm	Inch.	L	H	Tapping
15	1/2"	70	55	1/2"
20	3/4"	90	60	3/4"
25	1"	105	77	1"
32	1¼"	125	93	1¼"
40	1½"	160	114	1½"
50	2"	188	130	2"
65	2½"	210	140	2½"


Parts Name	Material	Specifications
Body & Cover	Cast Iron	IS 210 FG 200
Strainer	Stainless Steel	IS 7604
Gasket	Steam Jointing Sheet	IS 2712 Gr. W/3

- ☑ water
- ☐ air
- ☑ steam
- ☑ oil
- ☐ gases

Test Pressure (Hydrostatic)
21.1 Kg/cm²

C.I. BALL VALVE (Screwed)



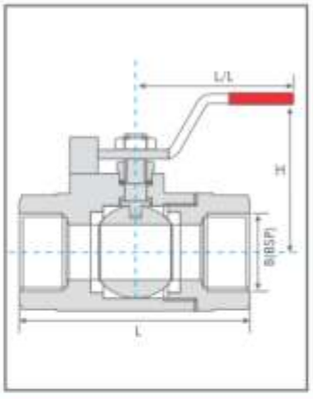

Sizes		Dimensions			BSP
mm	Inch.	L	H	L/L	Tapping
15	1/2"	75	53	110	1/2"
20	3/4"	86	60	125	3/4"
25	1"	93	65	125	1"
32	1¼"	106	80	180	1¼"
40	1½"	118	85	220	1½"
50	2"	136	100	220	2"
65	2½"	162	125	270	2½"
80	3"	184	135	320	3"
100	4"	220	155	320	4"

Parts Name	Material	Specifications
Body	Cast Iron	IS 210 FG 200
Connector	Cast Iron	IS 210 FG 200
Stem	Stainless Steel	IS 7604
Gland Nut	Carbon Steel	IS 1367
Gland Packing	PTFE	BS EN 12086-1
Ball	Stainless Steel	IS 7604
Seat	PTFE	BS EN 12086-1
Nuts	Carbon Steel	IS 1363
Lever	Carbon Steel	IS 1367

- ☑ water
- ☑ air
- ☐ steam
- ☑ oil
- ☑ gases

Test Pressure (Hydrostatic)
Seat : 1.6 Mpa.
Shell : 2.4 Mpa
Air Seat 7 Kg/cm²