
C.I. BALL VALVE FLANGED



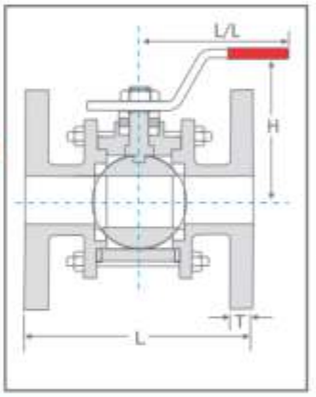

Sizes		Dimensions			
mm	Inch.	L	H	L/L	T
15	1/2"	178	53	110	12.7
20	3/4"	190	60	125	12.7
25	1"	203	65	125	12.7
32	1¼"	229	80	180	16
40	1½"	254	85	220	16
50	2"	267	100	220	19
65	2½"	292	125	270	19
80	3"	330	135	320	19
100	4"	356	155	320	22.2

Parts Name	Material	Specifications
Body	Cast Iron	IS 210 FG 200
Connector	Cast Iron	IS 210 FG 200
Stem	Stainless Steel	IS 7604
Gland Nut	Carbon Steel	IS 1367
Gland Packing	PTFE	BS EN 12086-1
Ball	Stainless Steel	IS 7604
Seat	PTFE	BS EN 12086-1
Nuts	Carbon Steel	IS 1363
Lever	Carbon Steel	IS 1367


- ☑ water
- ☑ air
- ☐ steam
- ☑ oil
- ☑ gases

Test Pressure (Hydrostatic)
Seat : 1.6 Mpa.
Body : 2.4 Mpa
Air Seat : 7 Kg/cm²

IS:9890

C.I. KINETIC AIR VALVE (Flanged)



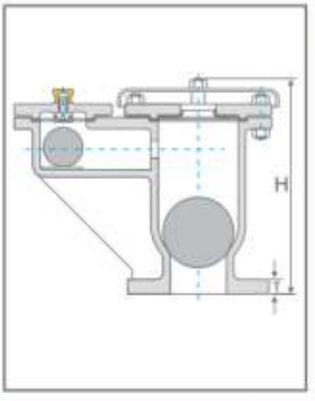

Sizes		Dimensions			
mm	Inch.	A	B	T	H
25	1"	150	260	16	210
40	1½"	196	324	16	260
50	2"	211	352	16	280
80	3"	236	373	21	305
100	4"	280	424	22	360
150	6"	450	674	24	487
200	8"	506	739	24.5	700

Parts Name	Material	Specifications
Body	Cast Iron	IS 210 FG 200
Cover	Cast Iron	IS 210 FG 200
Cowl	Cast Iron	IS 210 FG 200
Floats	Timber Core with Rubber Coating	--
Small Orifice	Cast Steel Rubber Coated	IS 7604 & IS 938 Type B
Large Orifice	Cast Iron Rubber Coated	IS 210 FG 200 & IS 938 Type B
Bolts & Nuts	Carbon Steel	IS 1363

- ☑ water
- ☑ air
- ☐ steam
- ☐ oil
- ☐ gases

Test Pressure (Hydrostatic)
Seat : 16 Kg/cm²

Flanged Ends as per IS:1538