LCZ-UM06-IN Compact ceiling speaker, 6W, metal

www.boschsecurity.com

BOSCH
Invented for life



- Available in 6 W power output
- Excellent for speech and music reproduction
- Compact design, suitable for small places
- Available in attractive signal-white color
- Quick installation through integrated spring mount mechanism

The LCZ-UM06-IN is a general purpose, 6 W, compact ceiling loudspeaker, suitable for speech as well as music reproduction, preferred in places where there is a space constraint.


System overview

The ceiling loudspeaker is compact in design, integrated with a metal grille and baffle, finished with an attractive signal-white color.
The loudspeaker has good sensitivity and a wide frequency range, which makes it suitable for speech and music reproduction. It has an in-built line matching transformer, which supports a 100 V line output from the amplifier. The transformer has 3-tappings - full power, half power and quarter power, which helps the user to select the desired output levels based on their customized requirements.
The loudspeaker is equipped with spring mounting mechanism, which helps in quick installation of the speaker on the ceiling.


Installation/configuration notes

The ceiling loudspeaker unit has a diameter of 105 mm. A cutout of 84 mm diameter needs to be carved out in the ceiling for installation.


The loudspeaker can be installed by pulling up the mounting clamps and inserting the loudspeaker into the cutout in the ceiling.

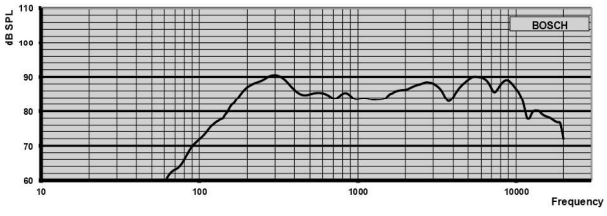

Frequency response 1/3rd octave smoothening

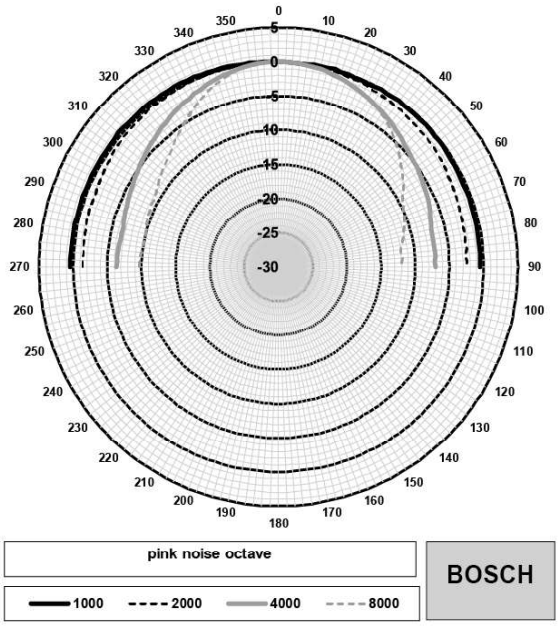

Polar diagram of LCZ-UM06-IN (high frequency part), normalized at 0-degrees axis.

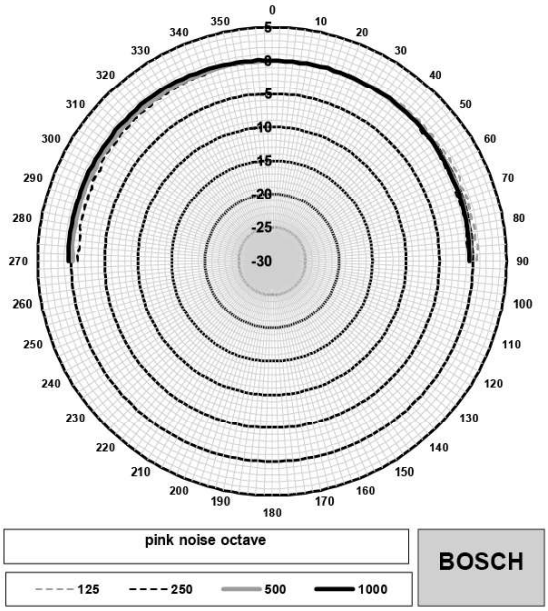

Polar diagram of LCZ-UM06-IN (low frequency part), normalized at 0-degrees axis.

Octave band sensitivity LCZ-UM06-IN

	Octave SPL 1 W/1 m	Total octave SPL 1 W/1 m	Total octave SPL Pmax/1 m
125 Hz	77.6	-	-
250 Hz	88.8	-	-
500 Hz	85.8	-	-
1000 Hz	84.4	-	-
2000 Hz	86.7		
4000 Hz	87.3	-	-
8000 Hz	88.1	-	-
A-weighted	-	83.7	85.0
Lin-weighted	-	90.9	92.4

Octave band opening angles LCZ-UM06-IN

	Horizontal	Vertical
125 Hz	180	180
250 Hz	180	180
500 Hz	180	180
1000 Hz	180	180
2000 Hz	180	180
4000 Hz	132	132
8000 Hz	86	86

Acoustical performance specified per octave
(all measurements are done with a pink noise signal; the values are in dBSPL)

Parts included

Quantity	Component
1	Compact ceiling loudspeaker unit
1	Installation manual

Technical specifications

Electrical

Rated power	6 W
Input Voltage	100 V
SPL (at 6 W/1 W, 1 kHz)	92/85 dB
Effective frequency range (-10 dB)	100 Hz to 20 kHz
Opening angle at 1kHz/4kHz (-6 dB)	180°/130°
Rated Voltage	100 V
Rated impedance	1667 Ohm
Connector	4-pole screw connector

Mechanical

Dimensions (DxH)	105 mm x 90 mm
Weight	580 g
Color	Signal-white (RAL 9003)

Environmental

Operating temperature	-5 °C to +55 °C
Storage Temperature	-40 °C to +70 °C
Relative humidity	95%

Ordering information

LCZ-UM06-IN Compact ceiling speaker, 6W, metal
Compact ceiling speaker, 6W, metal
Order number **LCZ-UM06-IN**

Represented by:

Europe, Middle East, Africa:
Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: + 31 40 2577 284
emea.securitysystems@bosch.com
emea.boschsecurity.com

Germany:
Bosch Sicherheitssysteme GmbH
Robert-Bosch-Ring 5
85630 Grasbrunn
Germany
www.boschsecurity.com

North America:
Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
onlinehelp@us.bosch.com
www.boschsecurity.us

Asia-Pacific:
Robert Bosch (SEA) Pte Ltd, Security Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia

© Bosch Security Systems 2019 | Data subject to change without notice
66485026571 | en, V1, 23. Aug 2019