



I2C1 Mode and Configuration

Mode

I2C I2C

Configuration

Reset Configuration


Parameter Settings User Constants NVMC Settings DMA Settings GPIO Settings

Search Signals

Search (Ctrl+F)

☐ Show only Modified Pins

Pin Name	Signal on Pin	GPIO output level	GPIO mode	GPIO Pull-up/P	Maximum outp.	User Label	Modified
PB6	I2C1_SCL	n/a	Alternate Funct...	n/a	High		☐
PB7	I2C1_SDA	n/a	Alternate Funct...	n/a	High		☐

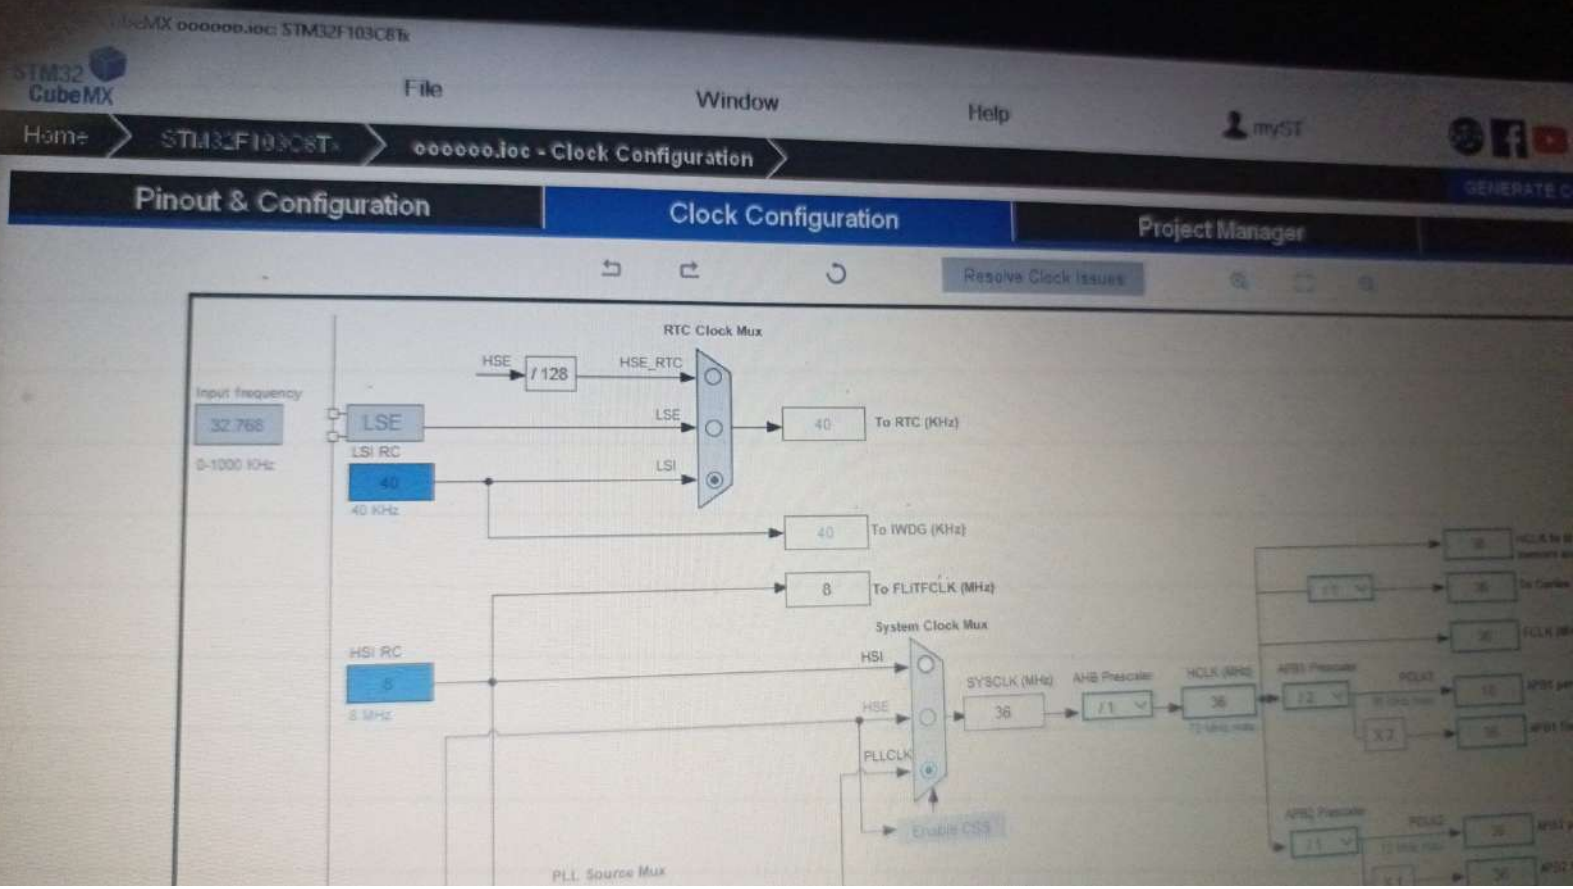

ation

Clock Configuration

Software Packs

Pinout

Project Manager

Tools

GENERATE CODE

GPIO Mode and Configuration

Configuration

Group By Peripherals

☒ GPIO

☒ I2C

Search Signals

☐ Show only Modified Pins

Pin Name	Signal on Pin	GPIO output level	GPIO mode	GPIO Pull-up/P...	Maximum outp...	User Label	Modified
PB6	I2C1_SCL	n/a	Alternate Funct...	n/a	High		☐
PB7	I2C1_SDA	n/a	Alternate Funct...	n/a	High		☐

?

Select Pins from table to configure them. Multiple selection is Allowed.

uration

Clock Configuration

Project Manager

GENERATE CODE

Software Packs

Pinout

Tools

NVIC Mode and Configuration

Configuration

NVIC

Code generation

Priority Group 4 bits for pre-emption priority 0 bit...

☐ Sort by Preemption Priority and Sub Priority

☐ Sort by interrupts names

Search Show

available interrupts

☒ Force DMA channels interrupts

NVIC Interrupt Table	Enabled	Preemption Priority	Sub Priority
Non maskable interrupt	☒	0	0
Hard fault interrupt	☒	0	0
Memory management fault	☒	0	0
Prefetch fault, memory access fault	☒	0	0
Undefined instruction or illegal state	☒	0	0
System service call via SWI instruction	☒	0	0
Debug monitor	☒	0	0
Pendable request for system service	☒	0	0
Time base: System tick timer	☒	15	0
PVD interrupt through EXTI line 16	☐	0	0
Flash global interrupt	☐	0	0
RCC global interrupt	☐	0	0
TIM3 global interrupt	☒	0	0
I2C1 event interrupt	☐	0	0
I2C1 error interrupt	☐	0	0

☐ Enabled

Preemption Priority

Sub Priority

Pinout

System view

System Core

Analog

DMA

GPIO

NVIC

RCC

SYS