EV CHARGER CATALOGUE



AC Series I
Standard Fast EV Charger

AC PORTABLE 3.5/7/11KW


AXI-EVOO-A3.5K-P

AXI-EVOO-7K-P

AXI-EVOO-11K-P



Key Benefits

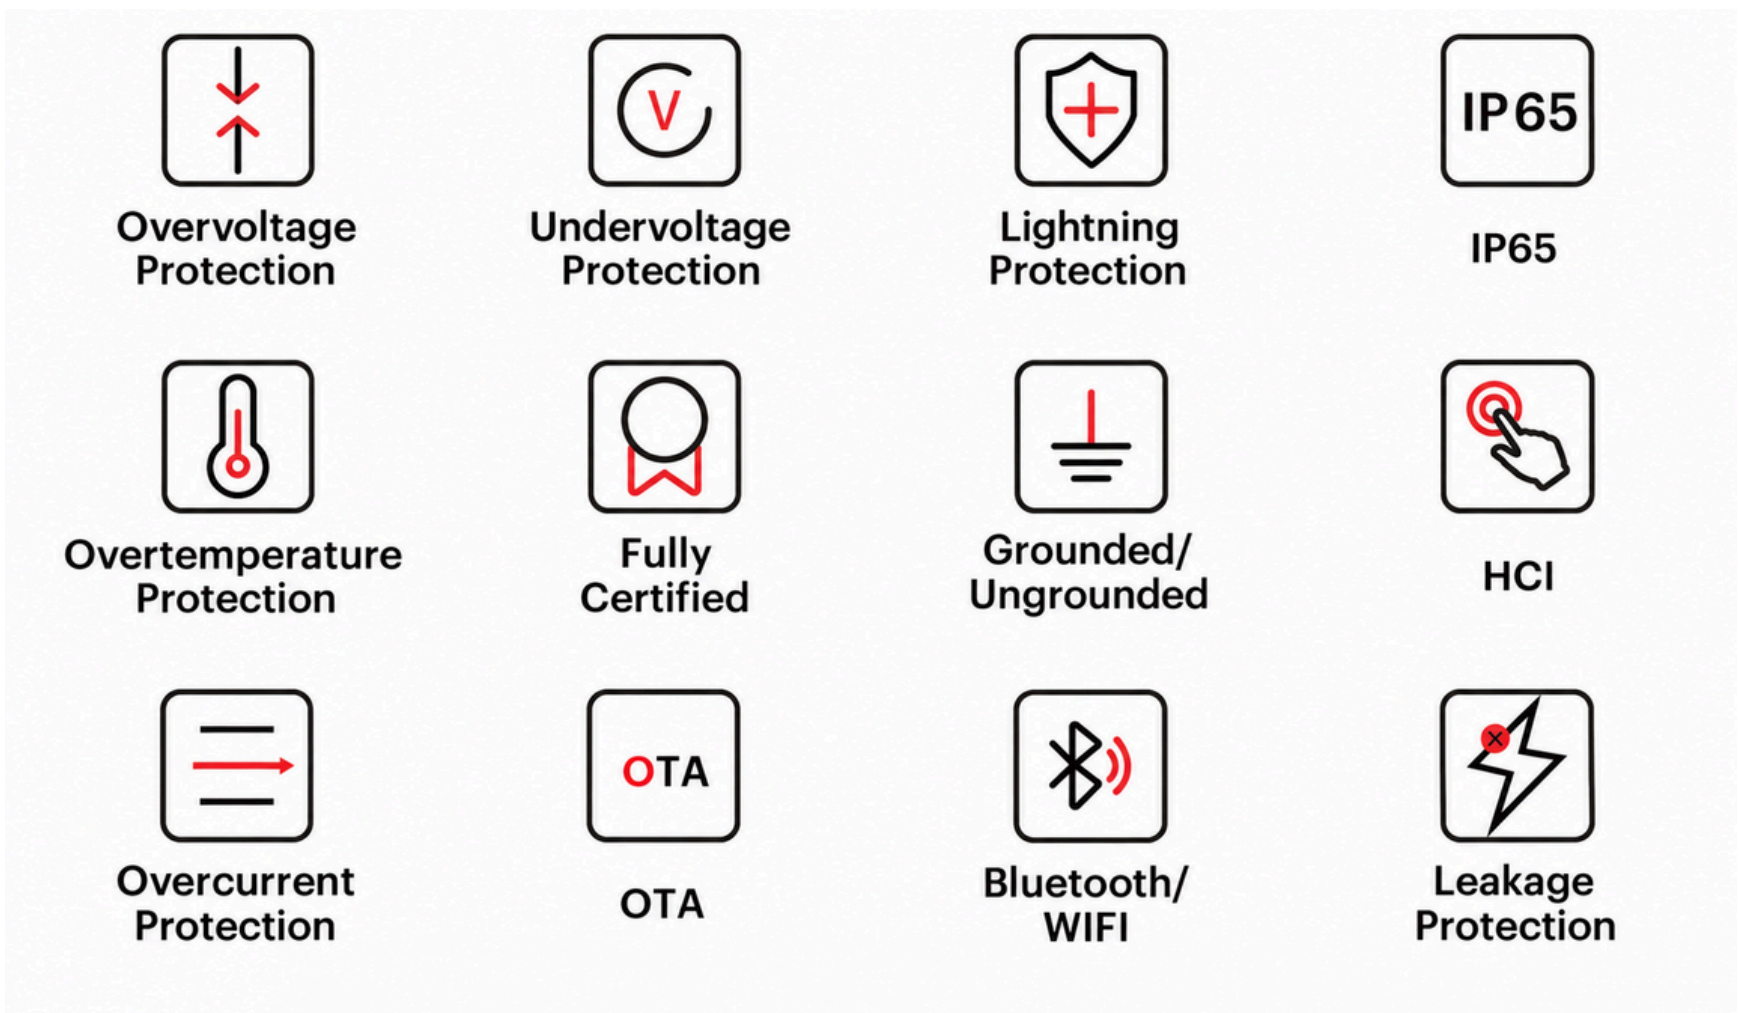

PRODUCT
PARAMETERS

GB/T

Input Voltage	220Vac ± 20% / 380Vac ± 20%
Product Size	213*80*50 mm
Input Current	16A/32A
Rating	3.5kW/7kW/11kW
Leakage Type	A
Operating Tumidity	5%~95% condensationless
Operating Temperature	-25 °C~+50 °C
Functional Support	Time reservation, grounding option, current regulation, Bluetooth/WIFI (optional)
Protective Function	Over-voltage protection, over-current protection, leakage protection, over-temperature protection, lightning protection, etc.

Type 2

Input Voltage	230Vac±20%/400Vac±20%
Product Size	213*80*50 mm
Input Current	16A/32A
Rating	3.5kW/7kW/11kW
Leakage Type	AC or A+DC6mA(optional)
Operating Tumidity	5%~95% condensationless
Operating Temperature	-25 °C~+50 °C
Functional Support	Time reservation, grounding option, current regulation, Bluetooth/WIFI (optional)
Protective Function	Over-voltage protection, over-current protection, leakage protection, over-temperature protection, lightning protection, etc.

Type 1 / NACS

Input Voltage	240Vac±20%
Product Size	213*80*50mm
Input Current	16A/32A/40A
Rating	3.8kW/7.6kW/9.6kW
Leakage Type	A or CCID20(optional)
Operating Tumidity	5%~95% condensationless
Operating Temperature	-25 °C~+50 °C
Functional Support	Time reservation, grounding option, current regulation, Bluetooth/WIFI (optional)
Protective Function	Over-voltage protection, over-current protection, leakage protection, over-temperature protection, lightning protection, etc.

3.5KW



7KW



11KW



AXI EVOO EV CHARGING SOLUTIONS
WEB: axisolar.com
EMAIL: info@axisolar.com
Address: Dalingshan, Dongguan City, Guangdong Province, China

© 2026 AXISolar All rights reserved.
We reserve the right of final interpretation.
The specifications in this datasheet are subject to change without notice.