# EV CHARGER CATALOGUE



AC Series II
Standard Fast EV Charger

# AC PORTABLE 3.5/7/11/22KW

**AXI-EVOO-A3.5K-P-II**


**AXI-EVOO-7K-P-II**

**AXI-EVOO-11K-P-II**

**AXI-EVOO-22K-P-II**




## Key Benefits

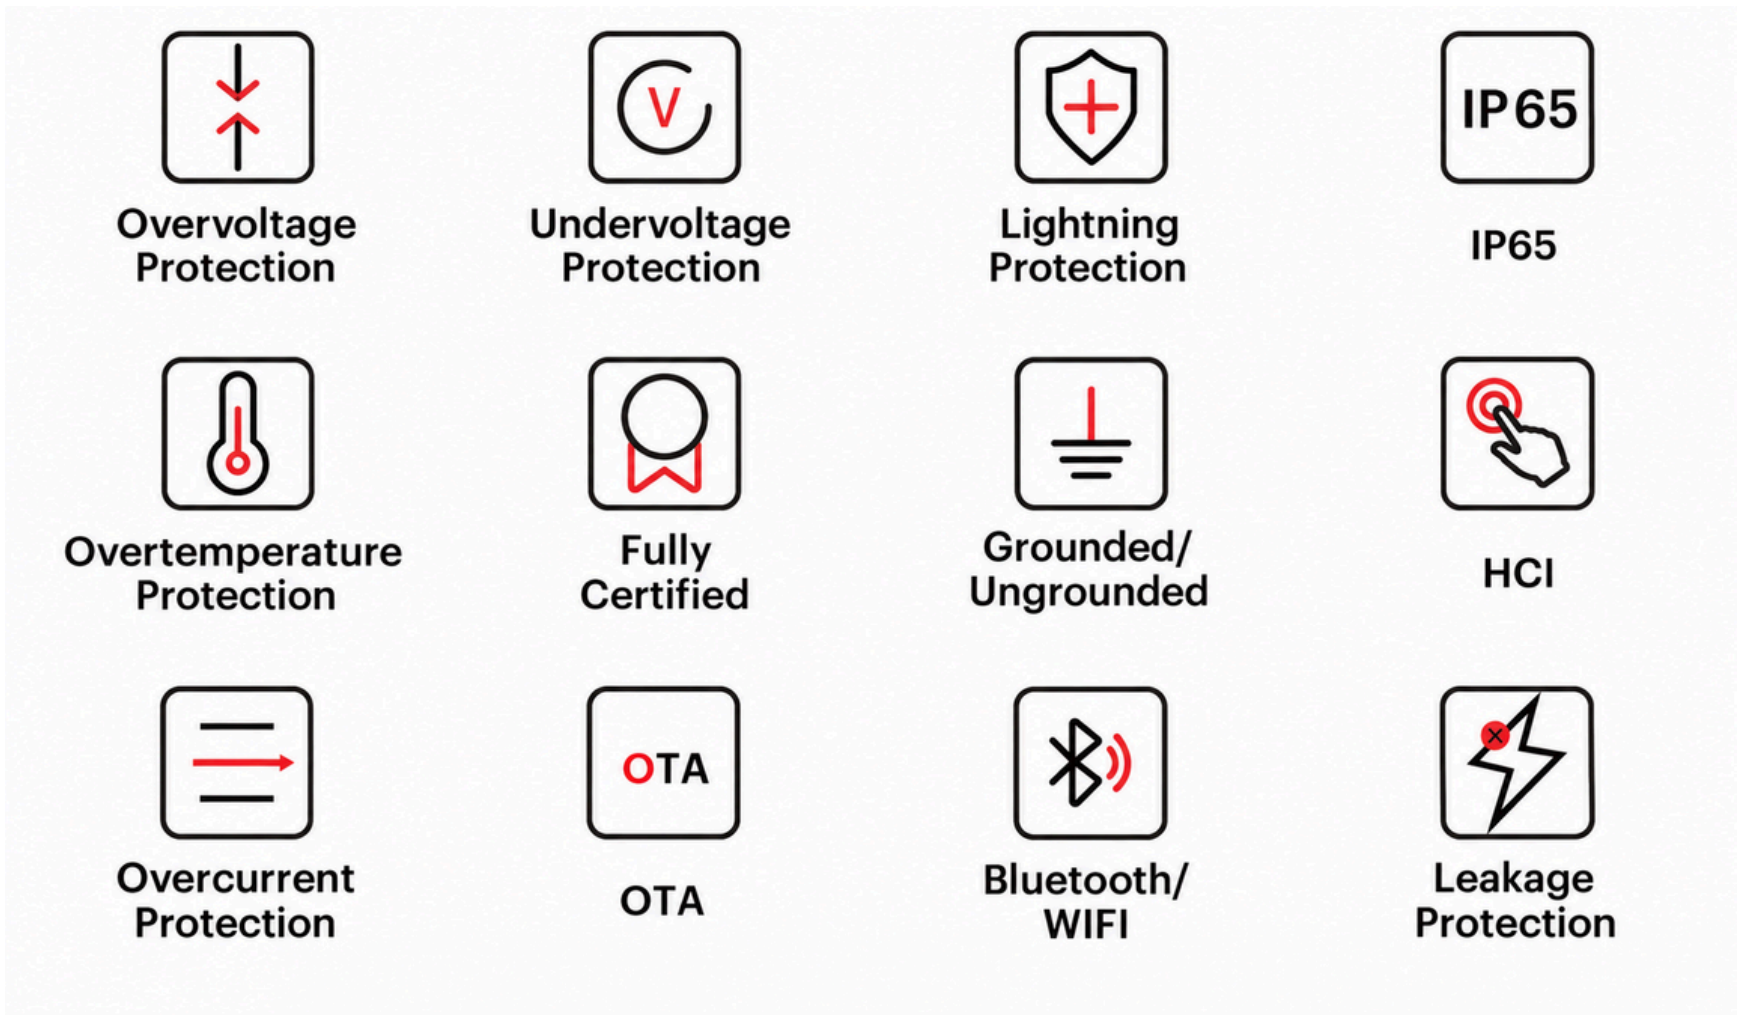

# PRODUCT PARAMETERS

## GB/T

| | |
|---|---|
| Input Voltage | 220Vac ± 20% / 380Vac ± 20% |
| Product Size | 206*80*56 mm |
| Input Current | 16A/32A |
| Rating | 3.5kW/7kW/11kW/22kW |
| Leakage Type | A |
| Operating Tumidity | 5%-95% condensationless |
| Operating Temperature | -25 °C~+50 °C |
| Functional Support | Indicator light, time reservation, grounding option, current regulation, Bluetooth/WIFI (optional) |
| Protective Function | Over-voltage protection, over-current protection, leakage protection, over-temperature protection, lightning protection, etc. |

## Type 2

| | |
|---|---|
| Input Voltage | 230Vac±20%/400Vac±20% |
| Product Size | 206*80*56 mm |
| Input Current | 16A/32A |
| Rating | 3.5kW/7kW/11kW/22kW |
| Leakage Type | AC or A+DC6mA(optional) |
| Operating Tumidity | 5%-95% condensationless |
| Operating Temperature | -25 °C~+50 °C |
| Functional Support | Indicator light, time reservation, grounding option, current regulation, Bluetooth/WIFI (optional) |
| Protective Function | Over-voltage protection, over-current protection, leakage protection, over-temperature protection, lightning protection, etc. |

## Type 1 / NACS

| | |
|---|---|
| Input Voltage | 240Vac±20% |
| Product Size | 206*80*56 mm |
| Input Current | 16A/32A/40A |
| Rating | 3.8kW/7.6kW/9.6kW |
| Leakage Type | A or CCID20(optional) |
| Operating Tumidity | 5%-95% condensationless |
| Operating Temperature | -25 °C~+50 °C |
| Functional Support | Indicator light, time reservation, grounding option, current regulation, Bluetooth/WIFI (optional) |
| Protective Function | Over-voltage protection, over-current protection, leakage protection, over-temperature protection, lightning protection, etc. |

3.5KW



7KW



11KW



22KW



**AXI EVOO EV CHARGING SOLUTIONS**
**WEB:** axisolar.com
**EMAIL:** info@axisolar.com
**Address:** Dalingshan, Dongguan City, Guangdong Province, China

© 2026 AXISolar All rights reserved.
We reserve the right of final interpretation.
The specifications in this datasheet are subject to change without notice.