# EV CHARGER CATALOGUE



AXI EVOO

## AC SERIES IV

Standard Fast EV Charger

# AC MOUNTED 7/11/22KW

**AXI-EVOO-7K-WM-4**

**AXI-EVOO-11K-WM-4**

**AXI-EVOO-22K-WM-4**




Tethered Cable Version

## Key Benefits

- Overvoltage Protection
- Undervoltage Protection
- Overcurrent Protection
- OTA
- Grounded/ Ungrounded
- HCI
- Overtemperature Protection
- Lightning Protection
- IP55
- Bluetooth/ WIFI
- Leakage Protection
- Fully Certified

# PRODUCT PARAMETERS

## GB/T

| | |
|---|---|
| Input Voltage | 220Vac±20%/380Vac±20% |
| Product Size | 295*195*95.5 mm |
| Input Current | 16A/32A |
| Rating | 7kW/11kW/22kW |
| Leakage Type | A |
| Operating Tumidity | 5%-95% condensationless |
| Operating Temperature | -25 °C~+50 °C |
| Functional Support | Display, Indicator, Swipe Card, Bluetooth/WIFI(optional) |
| Protective Function | Over-voltage protection, over-current protection, leakage protection, over-temperature protection, lightning protection, etc. |

## Type 2

| | |
|---|---|
| Input Voltage | 230Vac±20%/400Vac±20% |
| Product Size | 295*195*95.5 mm |
| Input Current | 16A/32A |
| Rating | 7kW/11kW/22kW |
| Leakage Type | AC or A+DC6mA(optional) |
| Operating Tumidity | 5%-95% condensationless |
| Operating Temperature | -25 °C~+50 °C |
| Functional Support | Display, Indicator, Swipe Card, Bluetooth/WIFI(optional) |
| Protective Function | Over-voltage protection, over-current protection, leakage protection, over-temperature protection, lightning protection, etc. |

## Type 1 / NACS

| | |
|---|---|
| Input Voltage | 240Vac±20% |
| Product Size | 295*195*95.5 mm |
| Input Current | 32A/48A |
| Rating | 7.6kW/11.5kW |
| Leakage Type | A or CCID20(optional) |
| Operating Tumidity | 5%-95% condensationless |
| Operating Temperature | -25 °C~+50 °C |
| Functional Support | Display, Indicator, Swipe Card, Bluetooth/WIFI(optional) |
| Protective Function | Over-voltage protection, over-current protection, leakage protection, over-temperature protection, lightning protection, etc. |

AXIEVOO

## AC SERIES IV


Standard Fast EV Charger

# AC MOUNTED 7/11/22KW

**AXI-EVOO-7K-WM-4-NP**

**AXI-EVOO-11K-WM-4-NP**

**AXI-EVOO-22K-WM-4-NP**

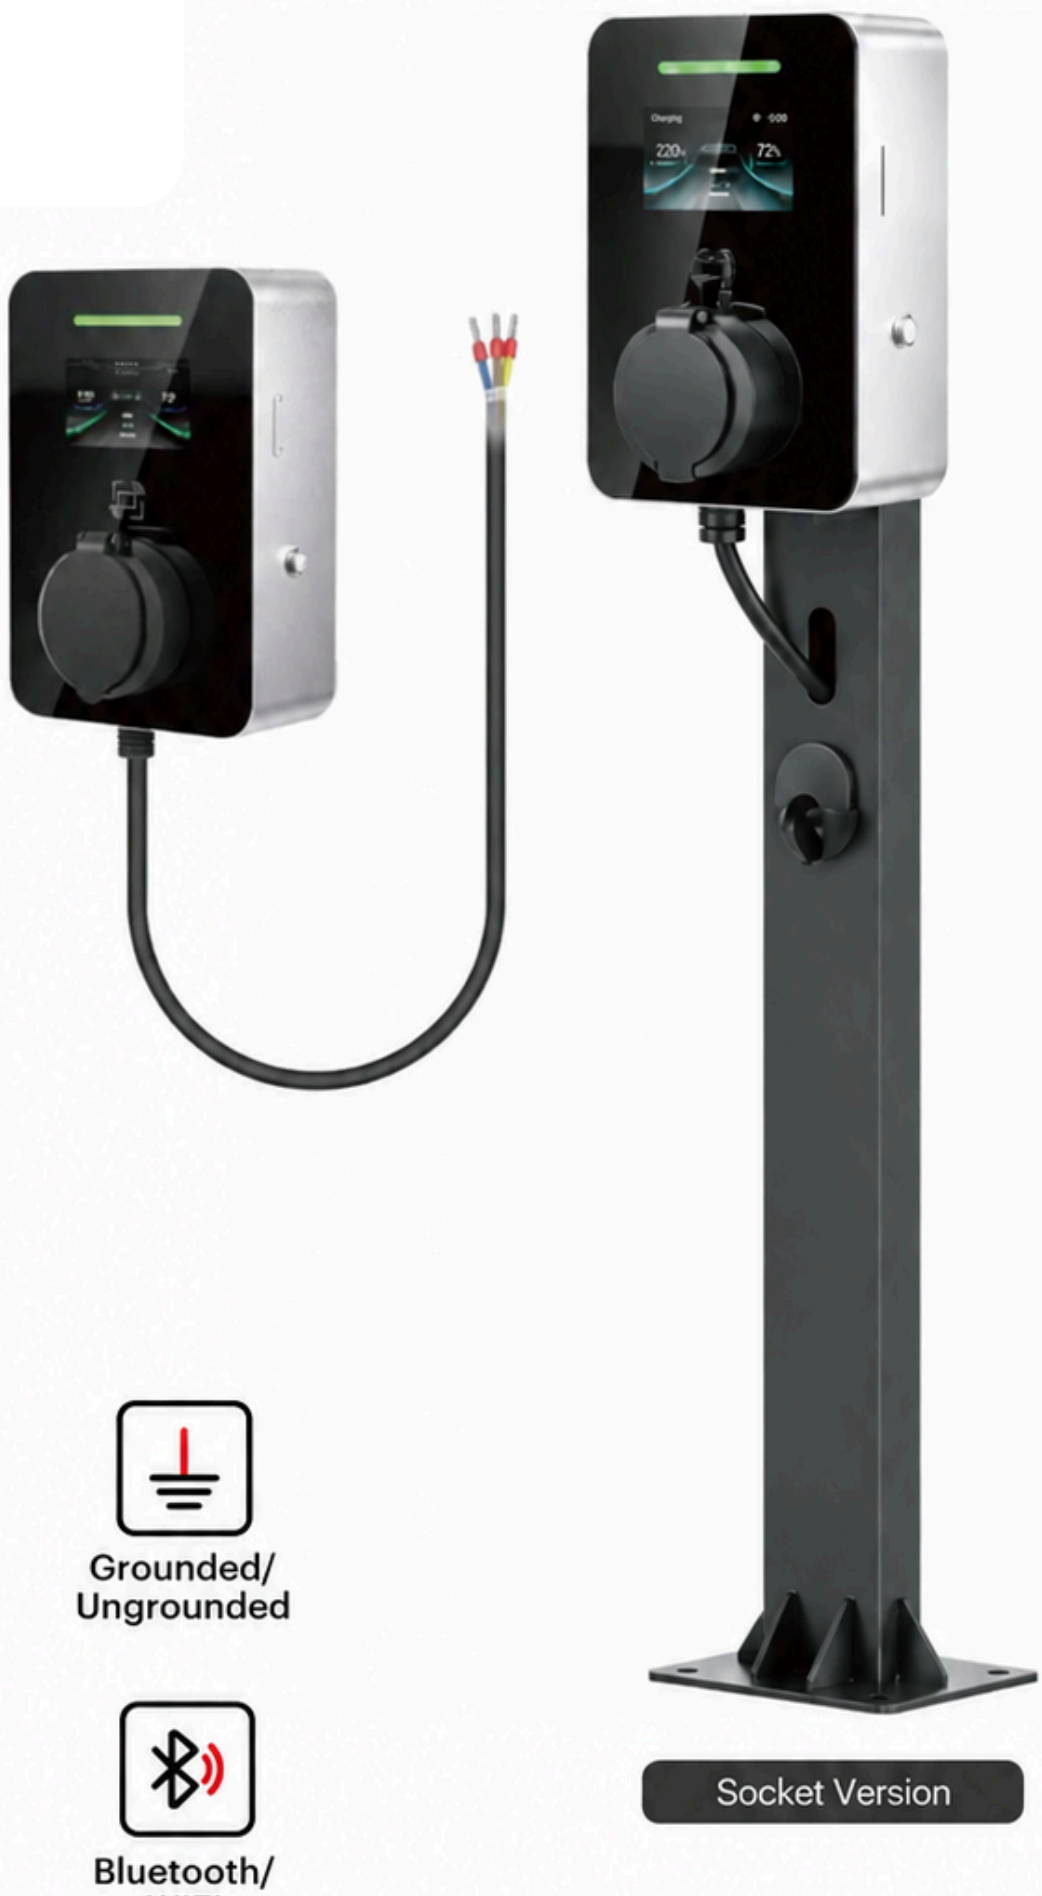


## Key Benefits

- Overvoltage Protection
- Undervoltage Protection
- Overcurrent Protection
- OTA
- Grounded/ Ungrounded
- Lightning Protection
- IP54
- Bluetooth/ WIFI

# PRODUCT PARAMETERS

## Type 2

| | |
|---|---|
| Input Voltage | 230Vac±20%/400Vac±20% |
| Product Size | 295*195*95.5 mm |
| Input Current | 16A/32A |
| Rating | 7kW/11kW/22kW |
| Leakage Type | AC or A+DC6mA(optional) |
| Operating Tumidity | 5%-95% condensationless |
| Operating Temperature | -25 ℃~+50 ℃ |
| Functional Support | Display, Indicator, Swipe Card, Bluetooth/WIFI(optional) |
| Protective Function | Over-voltage protection, over-current protection, leakage protection, over-temperature protection, lightning protection, etc. |



HCI

Overtemperature Protection

Leakage Protection

Fully Certified



Pragmatic




Indicator light: green always on
Modeling light: green always on



Charge Waiting




Indicator light: blue always on
Modeling light: blue always on



Charging Complete




Indicator light: blue always on
Modeling light: blue always on



Insert A Gun




Indicator light: green flashing
Modeling light: green always on



Charging




Indicator light: blue flashing
Modeling light: blue breathing



Faults




Indicator light: red flashing
Modeling light: red always on

**AXI EVOO EV CHARGING SOLUTIONS**
**WEB:** axisolar.com
**EMAIL:** info@axisolar.com
**Address:** Dalingshan, Dongguan City, Guangdong Province, China

© 2026 AXISolar All rights reserved.
We reserve the right of final interpretation.
The specifications in this datasheet are subject to change without notice.