EV CHARGER CATALOGUE



AXI-EVOO-7K-P

AXIEVOO

DC SERIES I

Standard Fast EV Charger


DC MOUNTED 20/30/40KW

AXI-EVOO-DC20K-WM-I-P

AXI-EVOO-DC30K-WM-I-P

AXI-EVOO-DC40K-WM-I-P



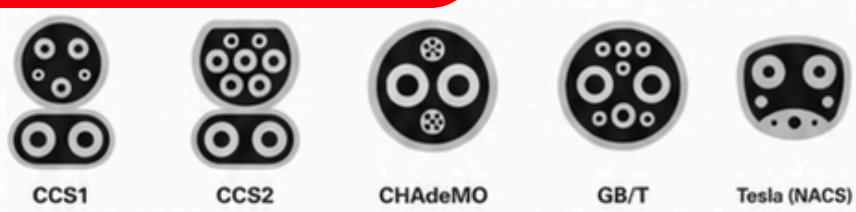

Key Benefits

- OTA
- CE
- HCI
- IP54
- Overcurrent Protection
- Bluetooth /WIFI
- Overload Protection
- Lightning Protection

Design Standard

- IEC 62196-3, Plugs, socket-outlets, vehicle connectors and vehicle inlets-Conductivecharging of electric vehicles -Part 3: Dimensional compatibility and interchangeability requirements for d.c.and a.c./d.c. pin and contact-tube vehicle couplers

PRODUCT
PARAMETERS

Model	AXI-EVOO-DC20K-WM-I-P	AXI-EVOO-DC20K-WM-I-P	AXI-EVOO-DC20K-WM-I-P
Output Power	20KW	30KW	40KW
Operating Voltage	400Vac±15%		
Operating Current (max)	67A (max)	100A (max)	133A (max)
CP Voltage Protection	≥±1V		
Storage Temperature	-40 ℃ - +80 ℃		
Operating Temperature	-25 ℃ - +50 ℃		
Installation Method	Wall Mounted		
Shell Protection Grade	IP54		
Body Size	600*400*180 mm	600*400*215 mm	600*400*215 mm
Communication Method	WiFi 2.4GHz / Bluetooth		
Over-undervoltage Protection	≤285V or ≥475V		
Operating Frequency	45Hz-65Hz		
Output Voltage Adjustable Range	+200Vdc - +1000Vdc		
Altitude	<2000 m		
Lightning Protection	Yes (Supported)		
Cooling Method	Forced Air Cooling		
HCI	Indicator 4.3" display		
Package Size	730*480*352 mm		
Output Line	5 m		



Idle green always on





Charge blue flash





Fault red flash





AXI EVOO EV CHARGING SOLUTIONS
WEB: axisolar.com
EMAIL: info@axisolar.com
Address: Dalingshan, Dongguan City, Guangdong Province, China

© 2026 AXISolar All rights reserved.
We reserve the right of final interpretation.
The specifications in this datasheet are subject to change without notice.