Make Solar Energy More Efficient!

AXIHJT101

HJT Bifacial Module

- Based on 210mm wafer, N-Type bifacial HJT half cut cells
- Module power up to 585W, Module efficiency up to 22.40%
- Use super MBB half-cut cell technology to minimize micro-crack impacts and no-cutting loss on modules
- The front generation power is 30% higher than the conventional module and the back power is 25% higher
- No BO-LID, excellent anti-LeTID & anti-PID performance. Low power degradation, high energy yield
- Better shading tolerance
- Heavy snow load up to 5400 Pa, wind load up to 2400 Pa


555W~585W

HJT

Size > 2 sqm Hetero-junction Technology

15-Year Warranty for Materials and Processing

30-Year Warranty for Extra Linear Power Output

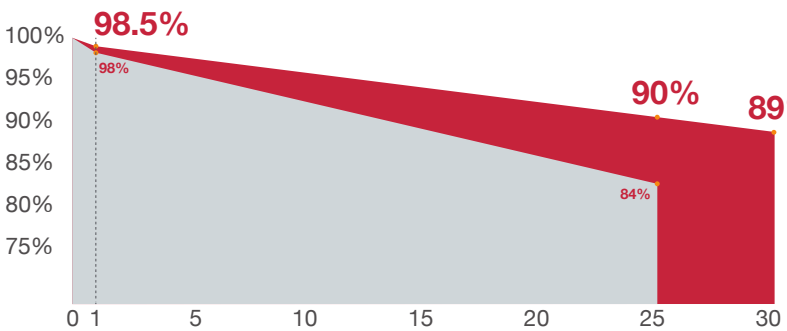

Compared with traditional PERC solar module
N-Type solar module have a power guarantee of up to 30 years.
Less than 1.5% attenuation in the 1st year
the annual attenuation from the 2nd year is no more than 0.4%
and the power is no less than 89% until the 30th year.

www.axisolar.com

AXIHJT101

STC/NMOT

STC (Standard Test Conditions): Irradiance 1000 W/ ㎡ , Cell temperature :25 °C, AM1.5 .
NMOT (Nominal Module Operating Temperature): Irradiance 800 W/ ㎡ , AM1.5,temperature20 °C,wind speed 1 m/s.


Model	AXIHJT110-555		AXIHJT110-560		AXIHJT110-565		AXIHJT110-570		AXIHJT110-575		AXIHJT110-580		AXIHJT110-585	
Power Tolerance (0~+5W)	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Pmax (W)	555	429	560	433	565	437	570	441	575	445	580	449	585	453
Vmp (V)	33.98	32.33	34.17	32.54	34.35	32.71	34.53	32.89	34.71	33.09	34.88	33.26	35.05	33.45
Imp (A)	16.33	13.27	16.39	13.31	16.45	13.36	16.51	13.41	16.57	13.45	16.63	13.50	16.69	13.54
Voc (V)	40.49	38.99	40.77	39.28	40.96	39.46	41.16	39.65	41.35	39.83	41.54	40.00	41.75	40.21
Isc (A)	17.16	13.90	17.19	13.95	17.25	14.00	17.31	14.05	17.37	14.10	17.43	14.15	17.49	14.20
Panel Efficiency (%)	21.20		21.40		21.60		21.80		22.00		22.20		22.40	


BSTC


BSTC (Bifacial Standard Test Conditions): Front side irradiation 1000W/ ㎡ , back side reflection irradiation 135W/ ㎡ ,AM=1.5, ambient temperature 25°C.

Model	AXIHJT110-555	AXIHJT110-560	AXIHJT110-565	AXIHJT110-570	AXIHJT110-575	AXIHJT110-580	AXIHJT110-585
Power Tolerance (0~+5W)	BSTC	BSTC	BSTC	BSTC	BSTC	BSTC	BSTC
Pmax (W)	612	618	623	629	634	640	645
Vmp (V)	33.98	34.17	34.35	34.53	34.71	34.88	35.05
Imp (A)	18.01	18.08	18.14	18.21	18.28	18.34	18.41
Voc (V)	40.49	40.77	40.96	41.16	41.35	41.54	41.75
Isc (A)	18.93	18.96	19.03	19.09	19.16	19.23	19.29

Electrical Curves ：

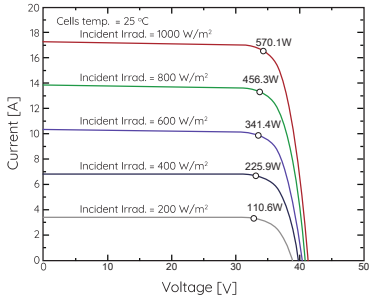


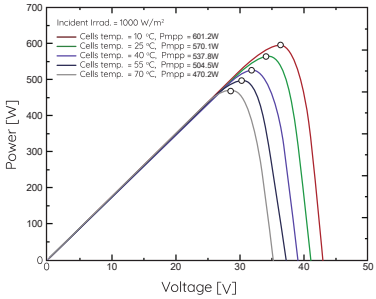

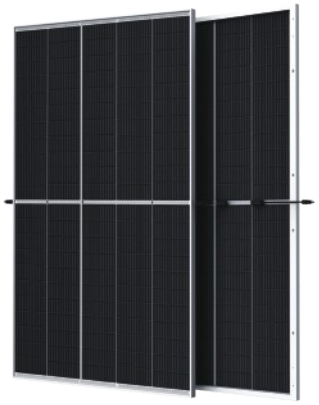

Mechanical Specification

Solar Cell Type	110 half-cut,N-Type, HJT cells
Module Dimensions (mm)	2384x1096x35
Module Weight (kg)	32.3
Front Cover	Solar glass, 2.0 mm, with anti-reflective surface
Back Cover	Solar glass, 2.0 mm
Frame	Anodized aluminum (black)
Junction Box	3 bypass diodes, IP68 rated, in accordance with IEC 62790
Cables	PV cable 4 mm², 0.3m length, in accordance with EN 50618 (or customized length)
Connectors	MC4-Evo2, in accordance with IEC 62852, IP68 rated only when connected
Packing	31pcs/pallet, 620pcs/40'HQ container

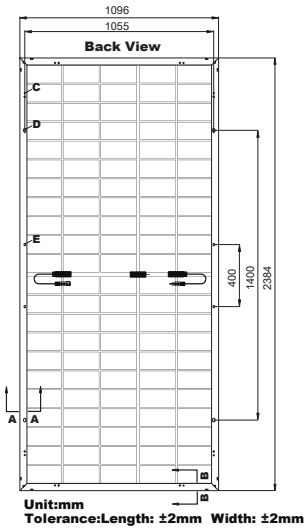


Properties of System Design

Maximum System Voltage (V)	1500
Maximum Series Fuse Rating (A)	35
Max. Test Load +/- (incl. Safety Factor of 1.5) (Pa)	5400/2400
Fire Class according to EN 13501-1	CLASS C (EN13501-1)
Operating Temperature (°C)	-40 to +85

Temperature Coefficients

Temperature Coefficient of Isc	+0.026%/ °C
Temperature Coefficient of Voc	-0.223%/ °C
Temperature Coefficient of Pmax	-0.243%/ °C
Nominal Module Operating Temperature (NMOT)	43±3/ °C



Warranty

Product Warranty (Y)	15
Power Warranty (Y)	30
Power after 1 Year	≥98.5% of nominal power
Annual Degradation (%/Y)	0.4
Power after 30 years	≥89% of nominal power

*The specifications and key features contained in this datasheet may deviate slightly from our actual products due to the ongoing innovation and product enhancement. AXI Solar reserves the right to make necessary adjustment to the information described herein at anytime without further notice.