


The image shows a minimalist interior setting. A black wooden chair with a simple, modern design is positioned on the right side. To its left is a small potted plant with green, rounded leaves in a terracotta-colored pot. The background is a wall made of numerous thin, vertical wooden slats that create a textured, rhythmic pattern. The floor is a light gray carpet. The overall aesthetic is clean and contemporary.

Flow

Acoustic Panel

spinneybeck


About

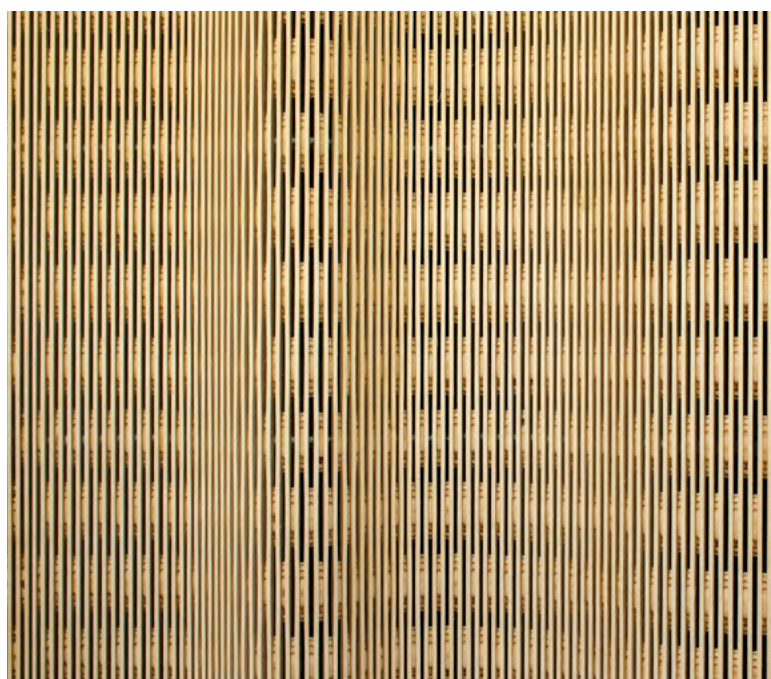

See the big picture of sound absorption with Flow. This panelized acoustic system comes in one panel size available in four different profiles that combine in a multitude of patterns.

Designed by Bernd Benninghoff, the four styles feature Dukta Flexible Wood that rises and falls over an acoustic box with polyester fleece infill to maximize acoustic absorption.


About

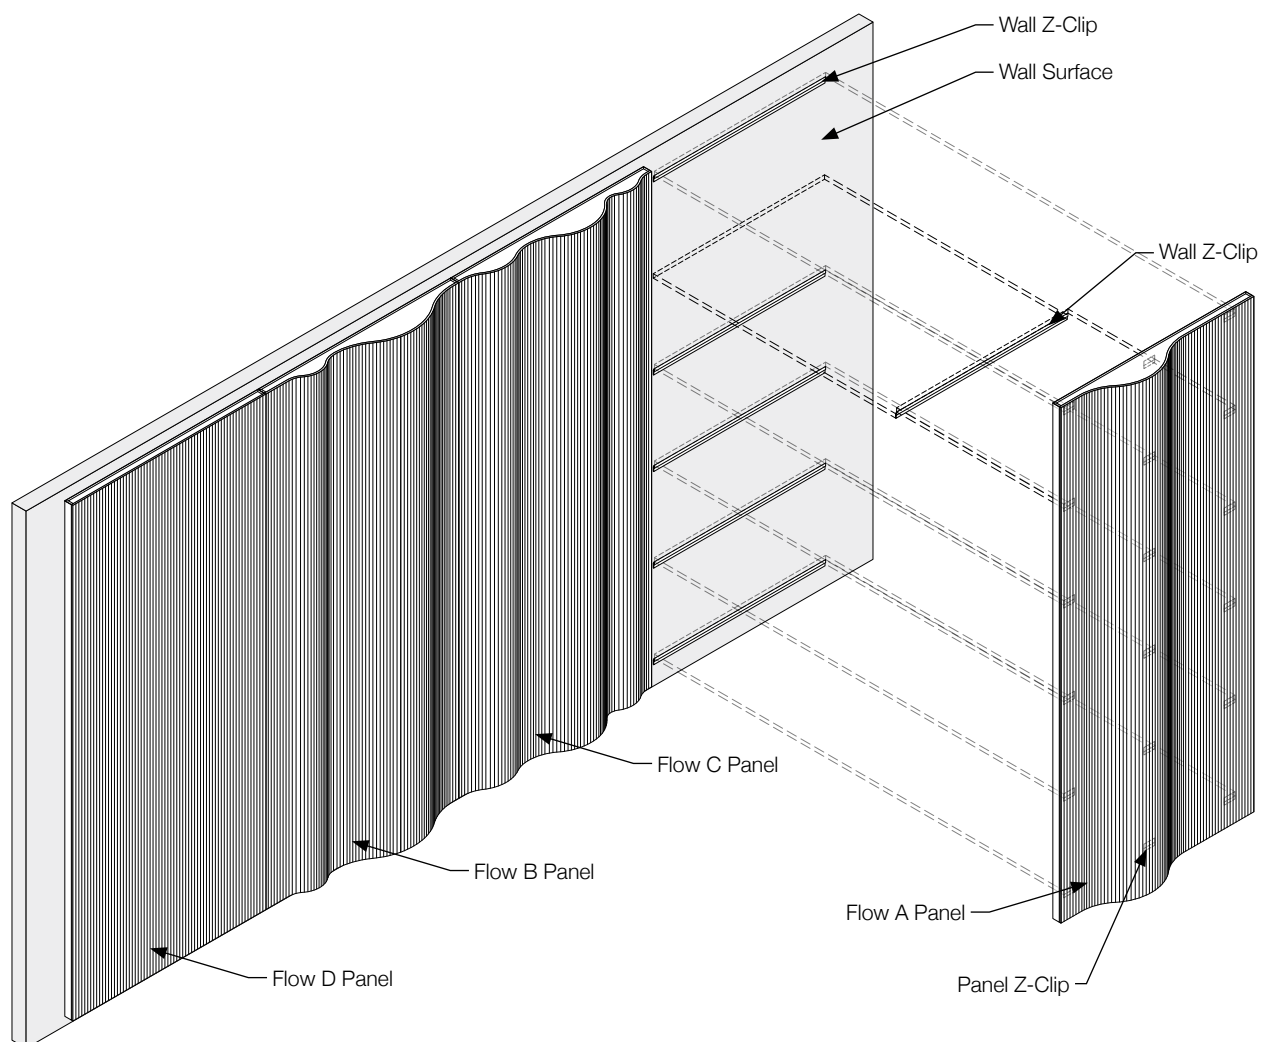

Exploded Axonometric

Flow panels come preinstalled with Z-Clip fasteners that mount in a standard grid.


Standard Panel Styles + Size

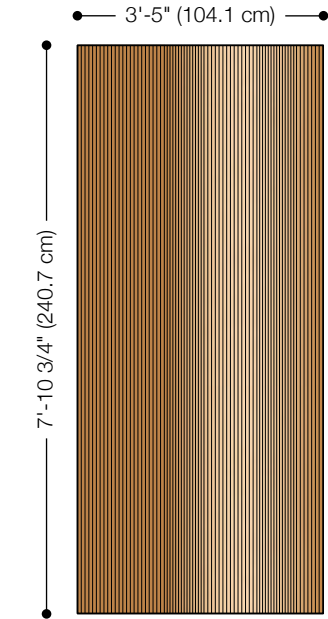

Flow A Elevation




Flow A Plan Section

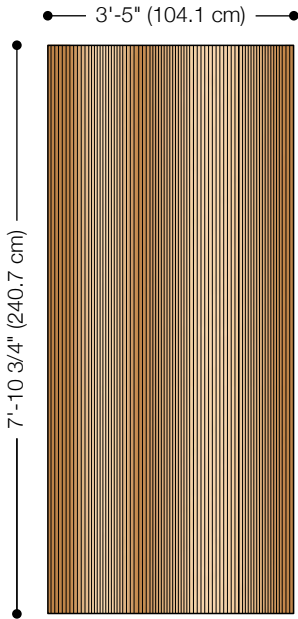

Flow B Elevation




Flow B Plan Section

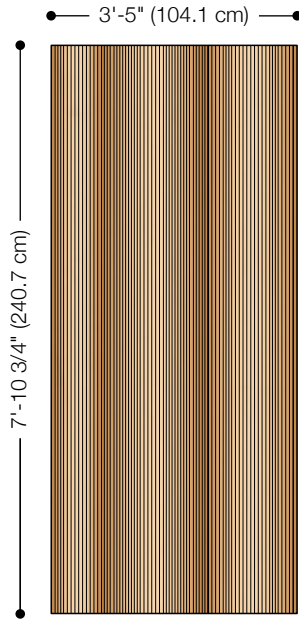

Flow C Elevation



Flow C Plan Section

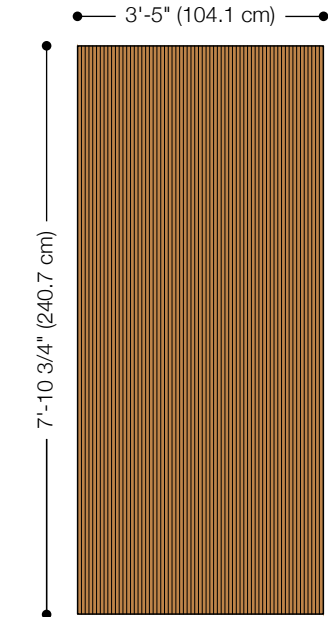

Flow D Elevation



Flow D Plan Section

Specifications

Name	Flow
Designer	Bernd Benninghoff Design
Content	Flexible Wood + Akustika 10 Substrate with Polyester Fleece Infill
Panel Styles	A, B, C, D
Panel Size	3'-5" x 7'-10 3/4" (104.1 x 240.7 cm)
Thickness	Flow A: 5 3/4 in (14.5 cm) Flow B: 5 3/4 in (14.5 cm) Flow C: 5 1/2 in (14.1 cm) Flow D: 1 3/4 in (4.4 cm) Note: Z-Clips add 3/16 in (0.95 cm) to thickness
Flexible Wood Pattern	Linar
Wood Type	Baltic Birch Plywood
Finish	Natural or Finished
Wood Open Area	20–40%
Weight	50 lb (22.7 kg) per panel
Durability	Contract or residential
Maintenance	Dust regularly. Spot clean with cloth dampened with water only.
Lead Time	Made to order and certain lead times will apply
Installation	All panels come preinstalled with Z-Clip fasteners that mount in a standard grid. The Z-Clips provided are 6 ft (1.8 m) in length and can be cut to fit according to site requirements. Spinneybeck offers installation services; however, application is basic and can be provided by a reputable general contractor. Additional blocking at installation site may be required.
Custom	Custom sizes must be quoted
Variation	Wood is a natural material and minor changes in color are evidence of the 100% natural origin of the material. Please note that Finished Wood Type may have a more pronounced grain.
Acoustics	ASTM C 423: NRC – 0.75, SAA – 0.73
Flammability	Test reports available upon request

Standard Flexible Wood Pattern



Linar in Baltic Birch Plywood Natural

Standard Wood Types




Baltic Birch Plywood Natural



Baltic Birch Plywood Finished

Standard Akustika 10 Substrate Color

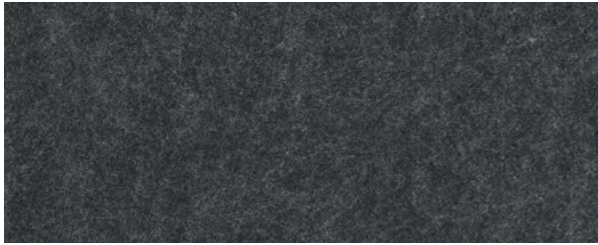


Dark Grey

Acoustic

Sound Absorption Results

Frequency (Hz)	Sound Absorption Coefficient (Sabins / ft ²)
100	0.10
125	0.11
160	0.20
200	0.31
250	0.46
315	0.61
400	0.72
500	0.75
630	0.73
800	0.75
1000	0.79
1250	0.84
1600	0.92
2000	0.95
2500	0.95
3150	0.94
4000	0.91
5000	0.92

SAA = 0.73
NRC = 0.75

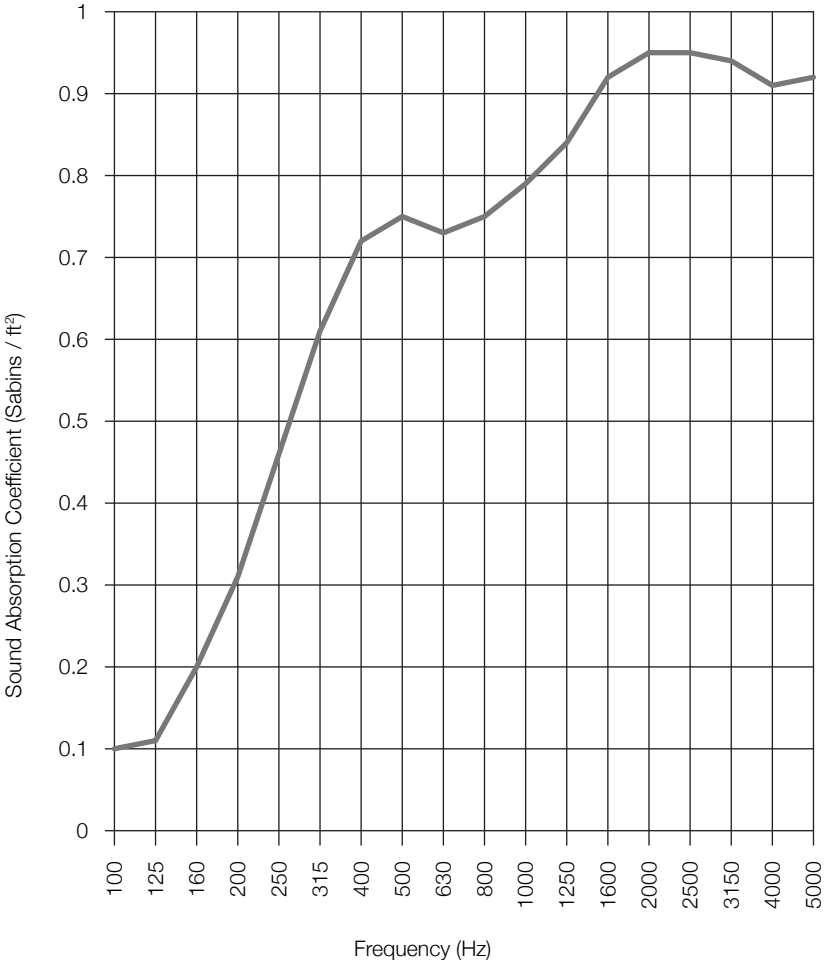

Flow Test Report

The test report quotes the frequency dependent sound absorption data as well as the single number ratings. Data taken from Test Report NGC4018035 conducted by NGC Testing Services.

Complete test results are available upon request.