



Still


Acoustic Panel

spinneybeck

About



Linar in Douglas Fir Finished

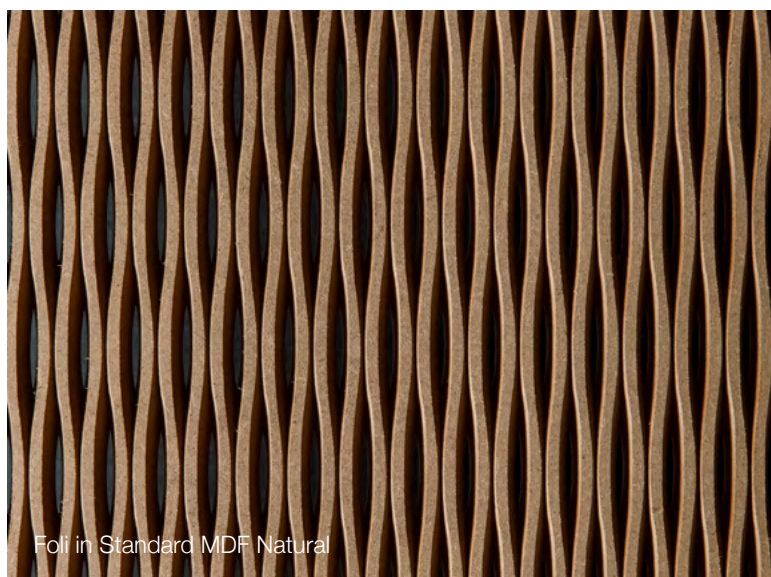


Foli in Standard MDF Natural

Still keeps things simple while maximizing sound absorption. These flat panels come in three patterns with seven wood types and two finishes to provide a wide range of options.

Constructed of Dukta Flexible Wood facing over an acoustic box with fleece infill, these unexpected acoustic panels provide an NRC of 0.75 to add natural texture with optimum performance.


About

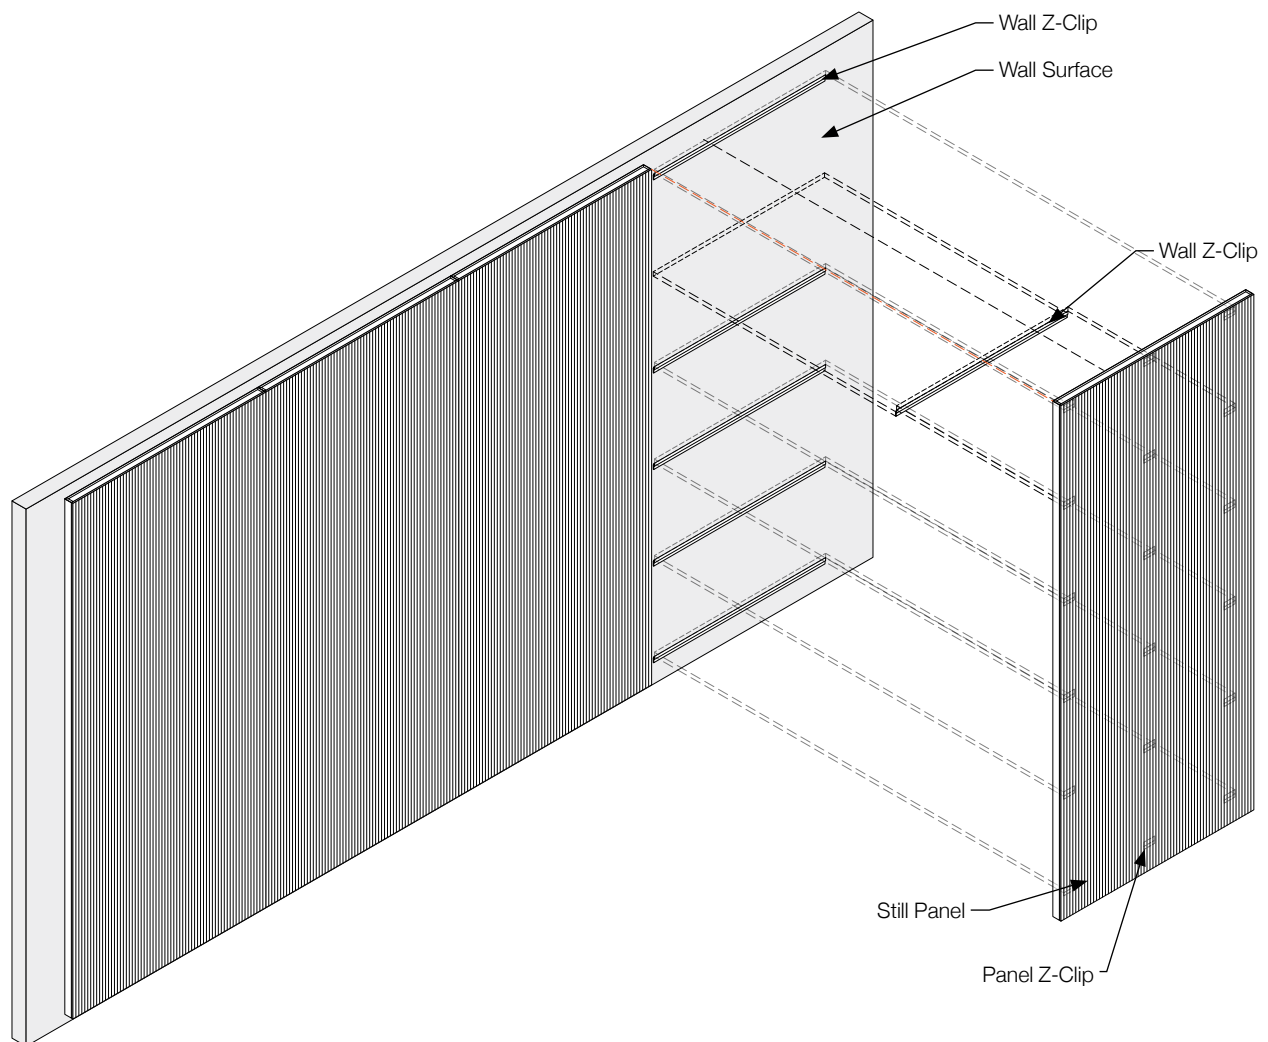

Exploded Axonometric

Still panels come preinstalled with Z-Clip fasteners that mount in a standard grid.

Standard Panel Size

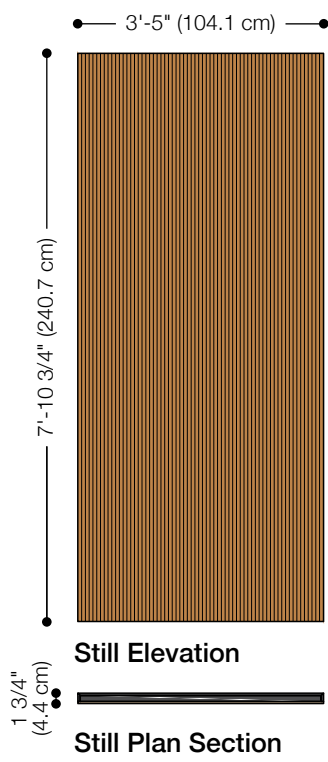


Note: Foli pattern will have 5/16-3/8 in (8-10 mm) solid border on left and right edges

Specifications

Name	Still
Designer	Bernd Benninghoff Design
Content	Flexible Wood + Akustika 10 Substrate with Polyester Fleece Infill
Panel Size	3'-5" x 7'-10 3/4" (104.1 x 240.7 cm)
Thickness	1 3/4 in (4.4 cm) Note: Z-Clips add 3/16 in (0.95 cm) to thickness
Flexible Wood Patterns	Foli, Linar, Sonar
Wood Types	Baltic Birch Plywood, White Pine, Douglas Fir, Walnut, Standard MDF, Grey MDF, Black MDF
Finish	Natural or Finished
Wood Open Area	Foli Pattern: 15–25% Linar + Sonar Flexible Wood Patterns: 20–40%
Vertical Border	Foli pattern will have 5/16–3/8 in (8–10 mm) solid border on left and right edges
Weight	50 lb (22.7 kg) per panel
Primary Uses	Wall panels
Durability	Contract or residential
Maintenance	Dust regularly. Spot clean with cloth dampened with water only.
Lead Time	Made to order and certain lead times will apply
Installation	All panels come preinstalled with Z-Clip fasteners that mount in a standard grid. The Z-Clips provided are 6 ft (1.8 m) in length and can be cut to fit according to site requirements. Spinneybeck offers installation services; however, application is basic and can be provided by a reputable general contractor. Additional blocking at installation site may be required.
Custom	Custom sizes must be quoted
Variation	Wood is a natural material and minor changes in color are evidence of the 100% natural origin of the material. Please note that Walnut will exhibit more conspicuous variation and Finished Wood Types may have a more pronounced grain.
Acoustics	ASTM C 423: NRC – 0.75, SAA – 0.73
Flammability	Test reports available upon request


Standard Flexible Wood Patterns

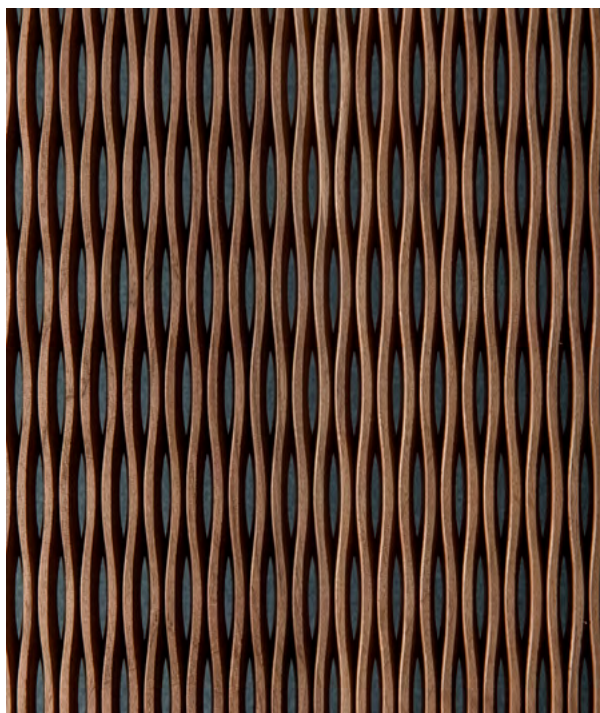

Foli in Walnut Natural



Linar in Baltic Birch Plywood Natural

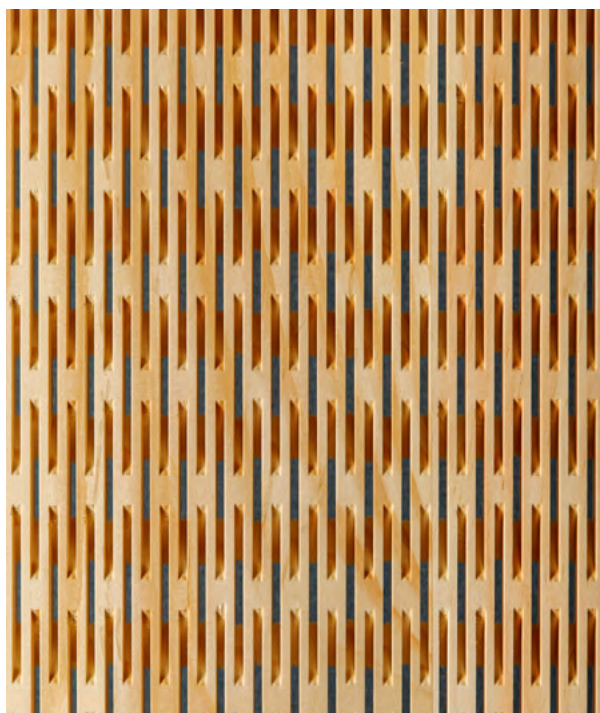

Sonar in White Pine Finished

Standard Wood Types



Baltic Birch Plywood Natural



Baltic Birch Plywood Finished



White Pine Natural




White Pine Finished




Douglas Fir Natural




Douglas Fir Finished

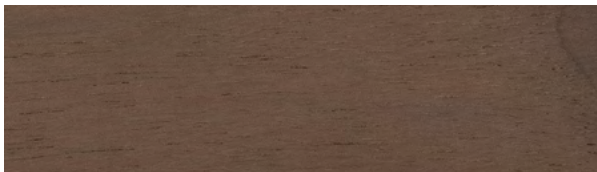


Walnut Natural

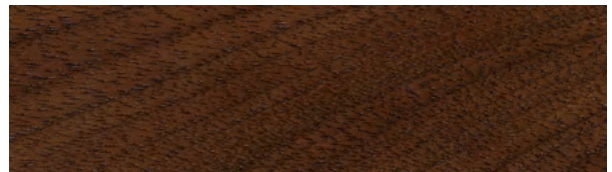


Walnut Finished

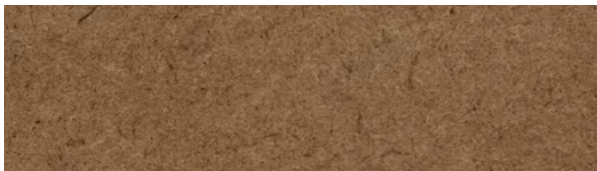

Standard MDF Natural

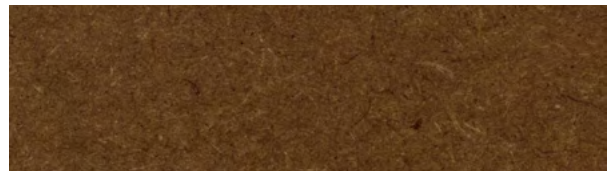


Standard MDF Finished

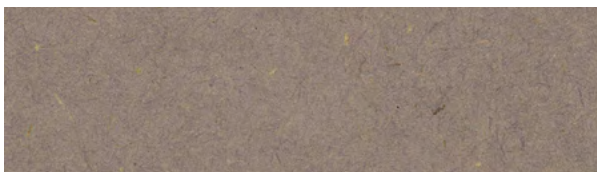


Grey MDF Natural



Grey MDF Finished

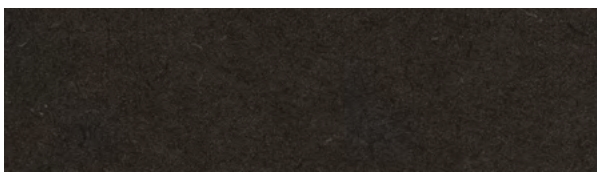


Black MDF Natural

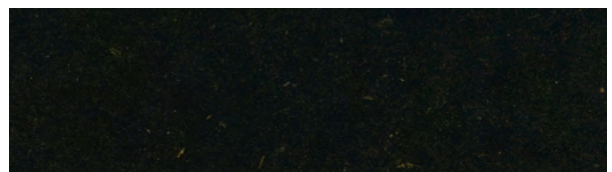

Black MDF Finished

Standard Substrate Color

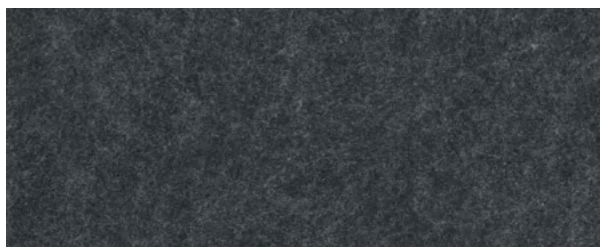


03 Dark Grey

Acoustic

Sound Absorption Results

Frequency (Hz)	Sound Absorption Coefficient (Sabins / ft ²)
100	0.10
125	0.11
160	0.20
200	0.31
250	0.46
315	0.61
400	0.72
500	0.75
630	0.73
800	0.75
1000	0.79
1250	0.84
1600	0.92
2000	0.95
2500	0.95
3150	0.94
4000	0.91
5000	0.92

SAA = 0.73
NRC = 0.75

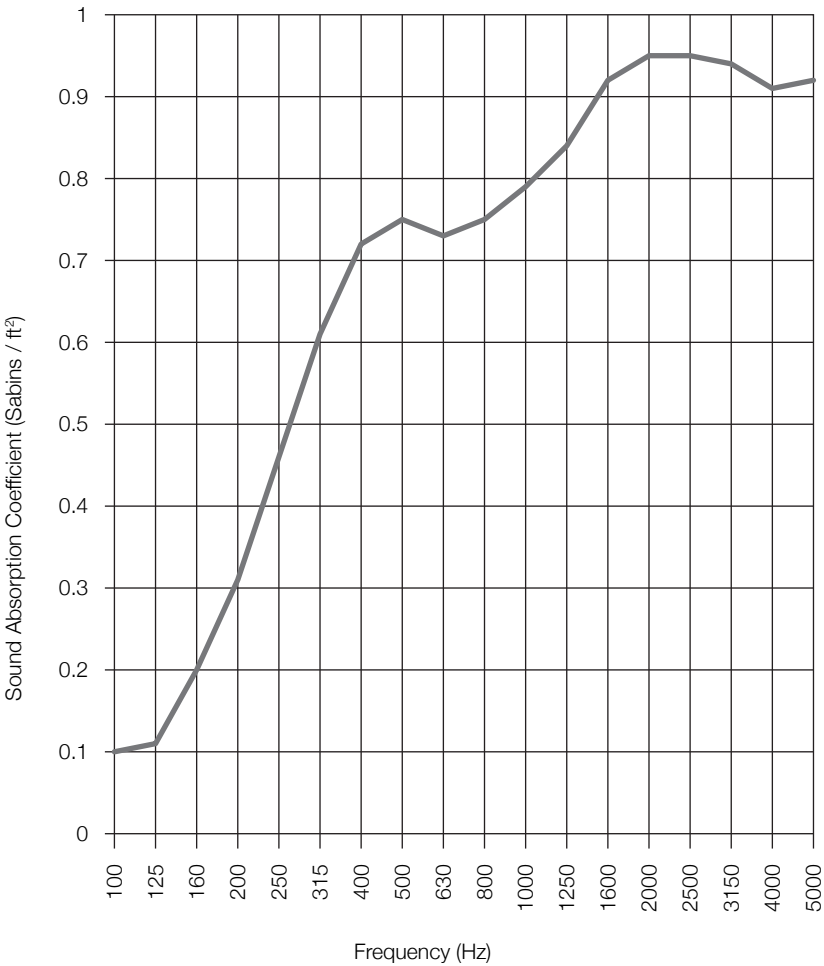

Still Test Report

The test report quotes the frequency dependent sound absorption data as well as the single number ratings. Data taken from Test Report NGC4018035 conducted by NGC Testing Services.

Complete test results are available upon request.