




Wave

Acoustic Panel

spinneybeck


About

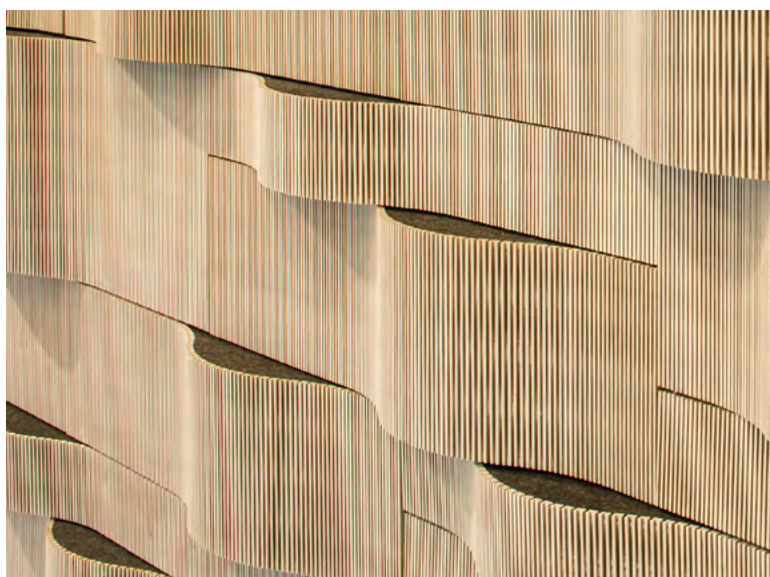

Quieting the chaos, Wave will make a splash in any space. Wood ripples along the wall in this powerhouse acoustic system designed by Bernd Benninghoff.

Dukta Flexible Wood available in Baltic Birch Plywood in Natural or Finished covers a highly-effective acoustic box. This acoustic system is comprised of modular panels in varied sizes that assemble in one standard configuration.

About

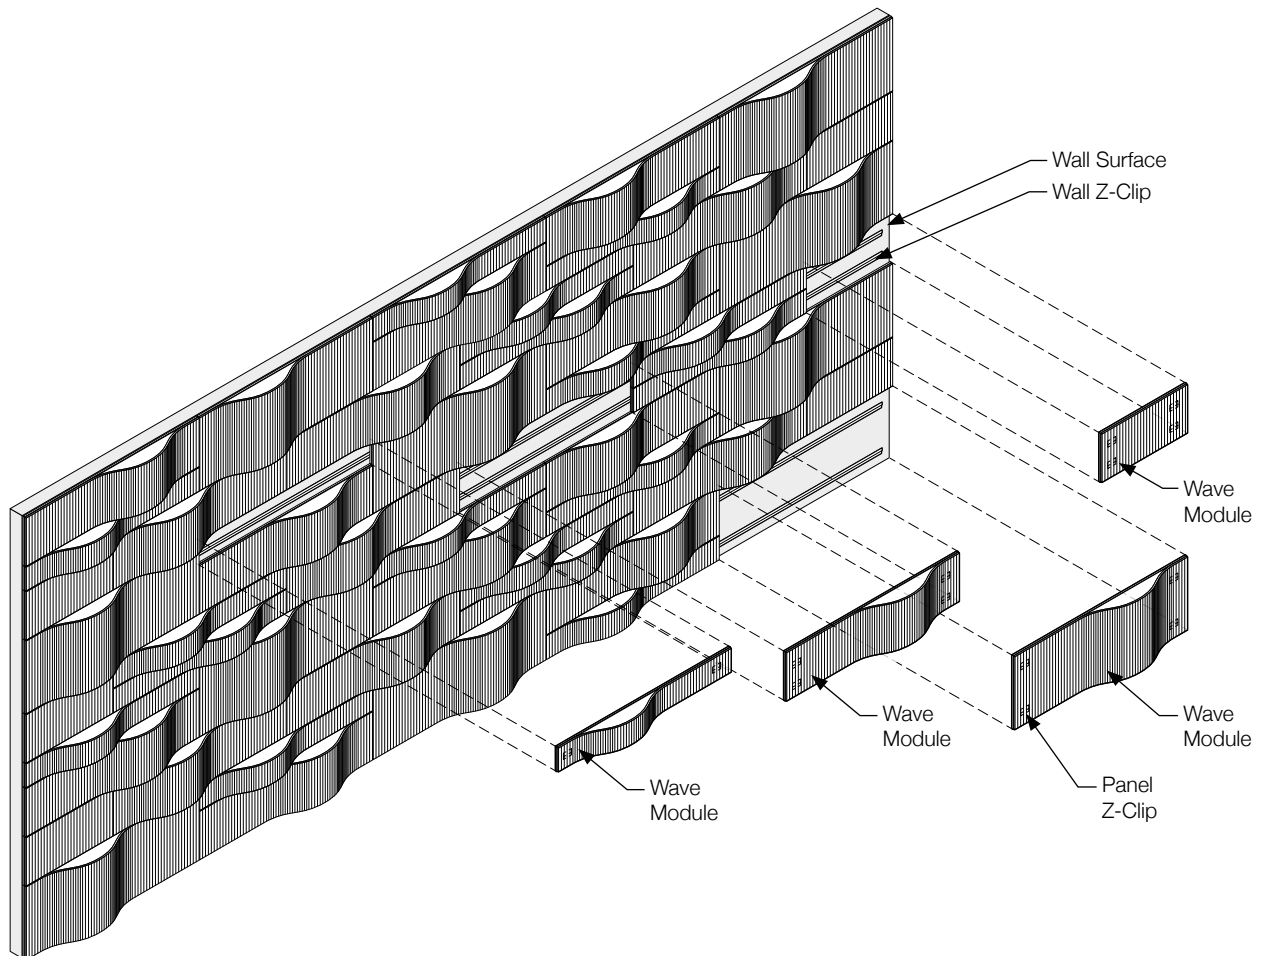


Exploded Axonometric

Wave panels come preinstalled with Z-Clip fasteners that mount in a standard grid.

Standard Configuration




Elevation

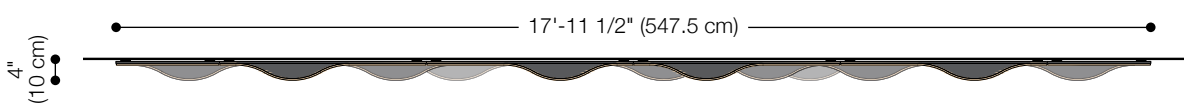

Plan Section

These diagrams are provided as an example of a typical installation to convey scale only. Wall installations may have varied overall dimensions. Please contact FilzFelt Customer Service for guidance in installation planning.

Standard Configuration

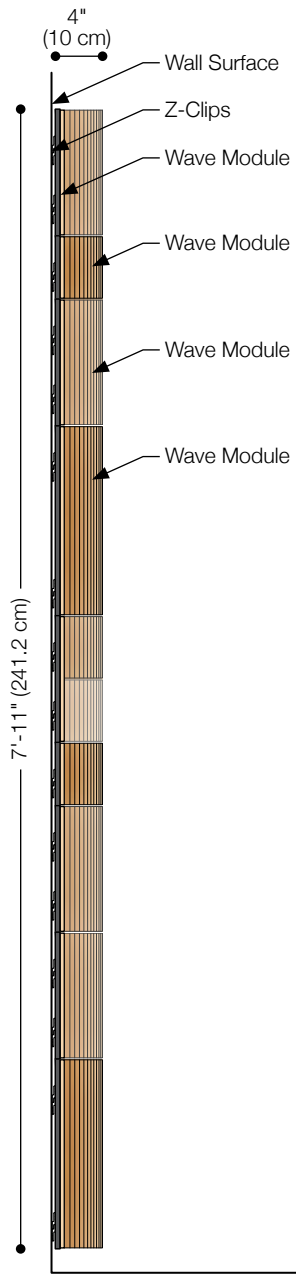

Wall Section

These diagrams are provided as an example of a typical installation to convey scale only. Wall installations may have varied overall dimensions. Please contact FilzFelt Customer Service for guidance in installation planning.

Specifications

Name	Wave
Designer	Bernd Benninghoff Design
Content	Flexible Wood + Akustika 10 Substrate
Thickness	3/4–4 in (1.9–10 cm) Note: Z-Clips add 3/16 in (0.95 cm) to thickness
Flexible Wood Pattern	Linar
Wood Type	Baltic Birch Plywood
Finish	Natural or Finished
Wood Open Area	20–40%
Weight	2.1–7 lb (1.0–3.2 kg) per panel
Durability	Contract or residential
Maintenance	Dust regularly. Spot clean with cloth dampened with water only.
Lead Time	Made to order and certain lead times will apply
Installation	All panels come preinstalled with Z-Clip fasteners that mount in a standard grid. The Z-Clips provided are 6 ft (1.8 m) in length and can be cut to fit according to site requirements. Spinneybeck offers installation services; however, application is basic and can be provided by a reputable general contractor. Additional blocking at installation site may be required.
Custom	Custom sizes must be quoted
Variation	Wood is a natural material and minor changes in color are evidence of the 100% natural origin of the material. Please note that Finished Wood Type may have a more pronounced grain.
Acoustics	ASTM C 423: NRC – 0.50, SAA – 0.51
Flammability	Test reports available upon request

Standard Flexible Wood Pattern



Linar in Baltic Birch Plywood Natural

Standard Wood Types



Baltic Birch Plywood Natural



Baltic Birch Plywood Finished

Standard Akustika 10 Substrate Color




Dark Grey

Acoustic

Sound Absorption Results

Frequency (Hz)	Sound Absorption Coefficient (Sabins / ft ²)
100	0.12
125	0.08
160	0.08
200	0.15
250	0.21
315	0.33
400	0.42
500	0.49
630	0.51
800	0.51
1000	0.53
1250	0.61
1600	0.71
2000	0.78
2500	0.84
3150	0.86
4000	0.86
5000	0.83

SAA = 0.51
NRC = 0.50

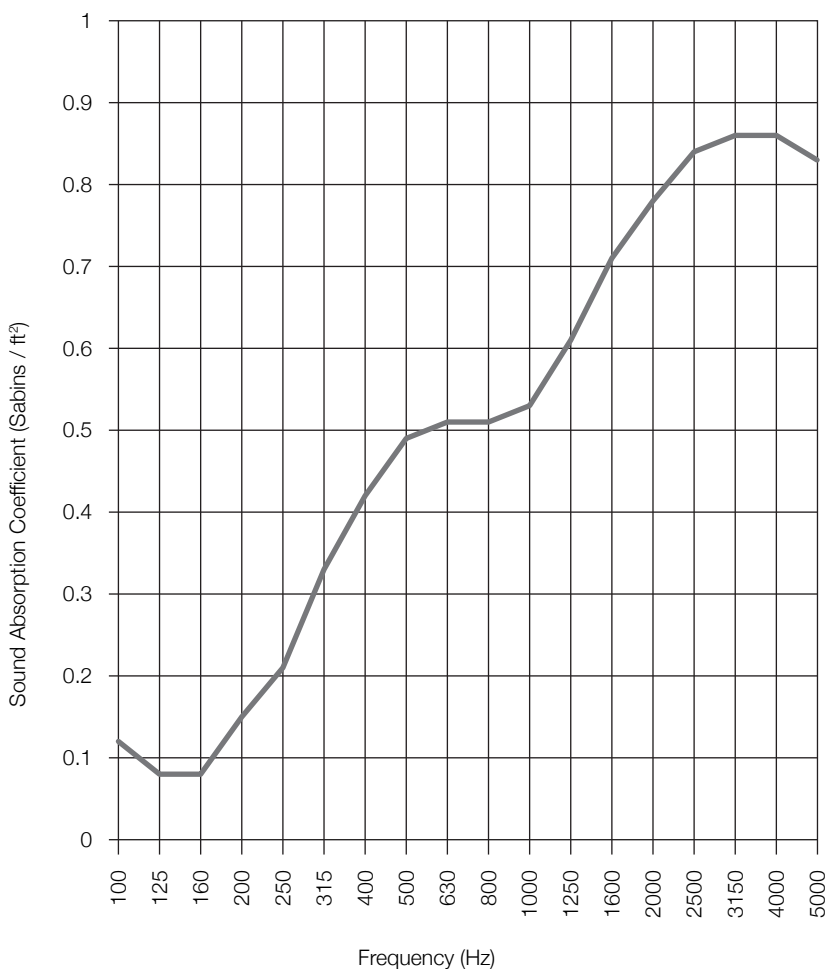

Wave Test Report

The test report quotes the frequency dependent sound absorption data as well as the single number ratings. Data taken from Test Report NGC4018033 conducted by NGC Testing Services.

Complete test results are available upon request.