disk

:: *Disk IOs per device*

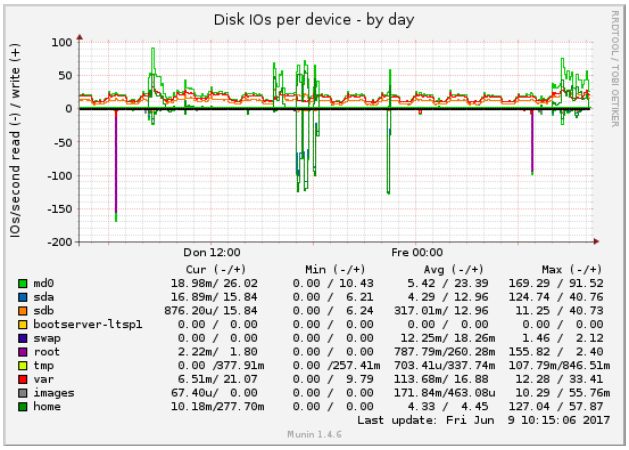

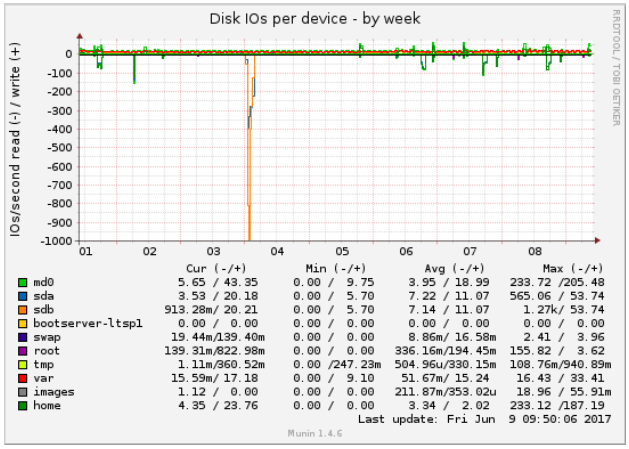

:: *Disk latency per device*

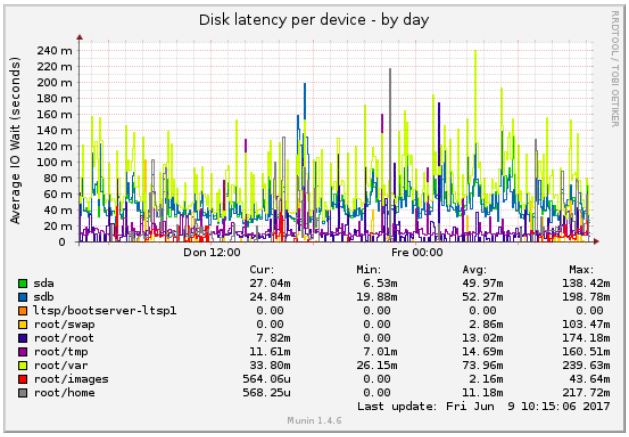

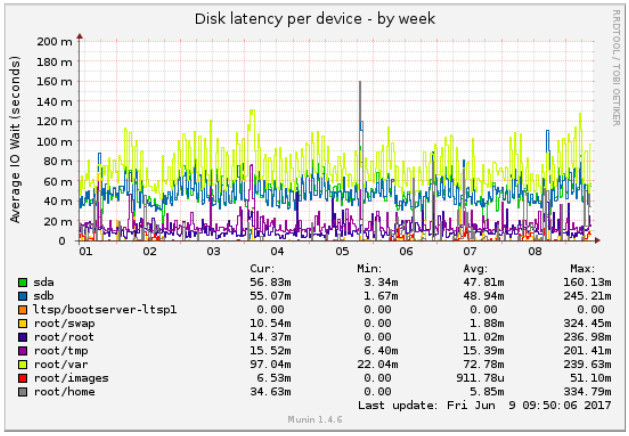

:: *Disk throughput per device*

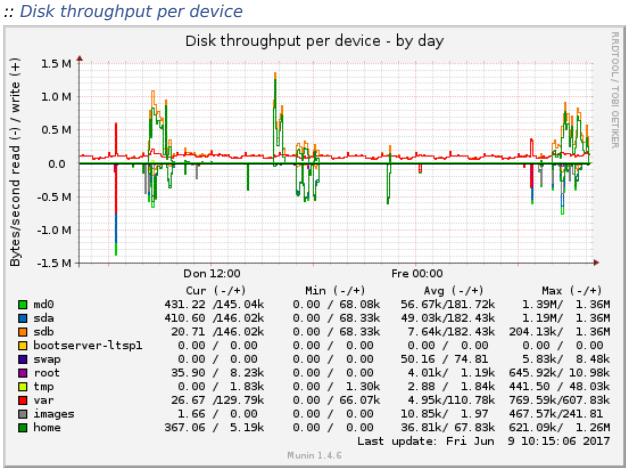

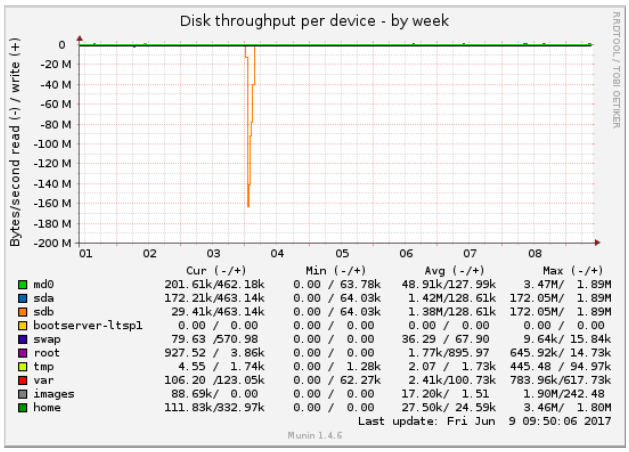

:: *Disk usage in percent*

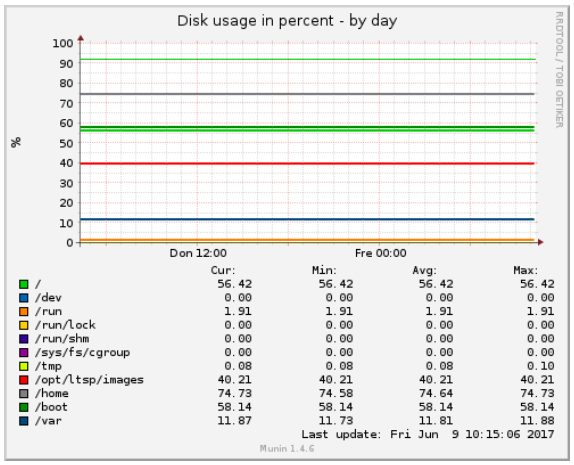

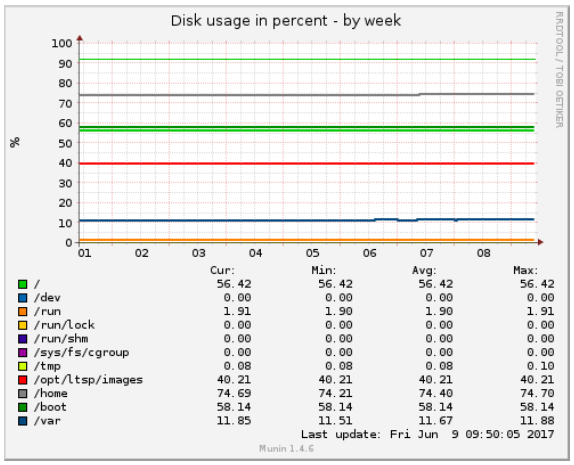

:: *Disk utilization per device*

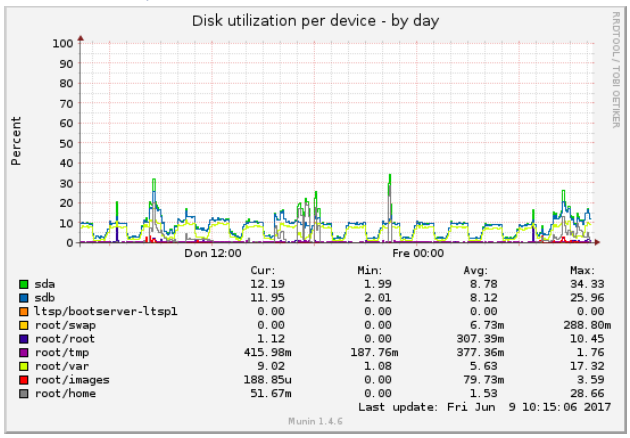

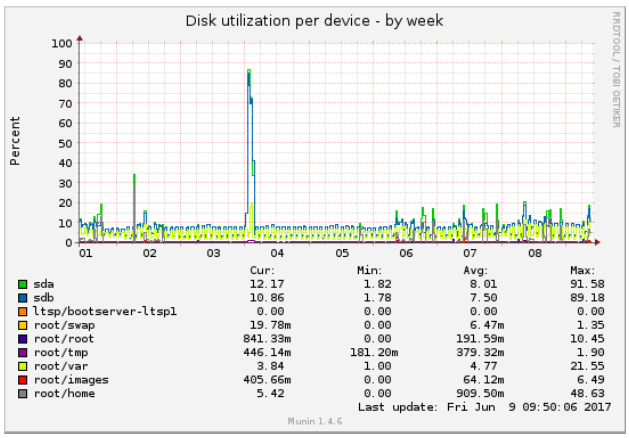

:: *Inode usage in percent*

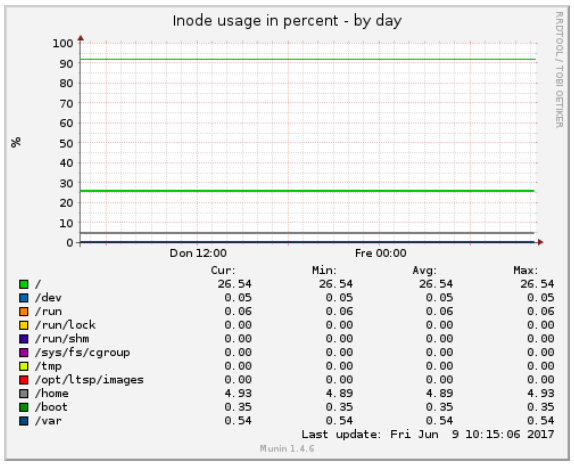

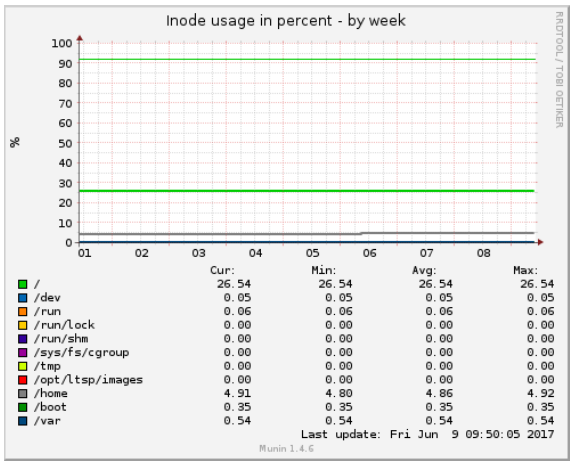

:: *IO Service time*

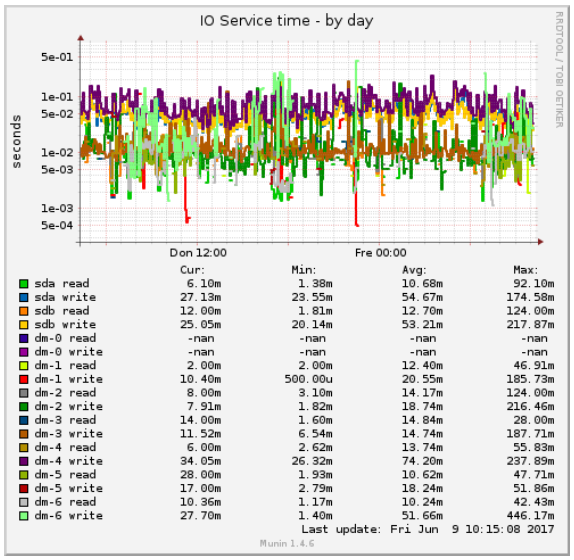

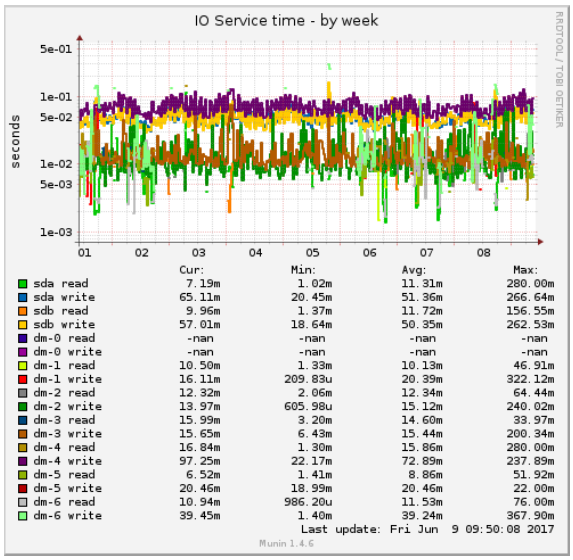

:: *IOstat*

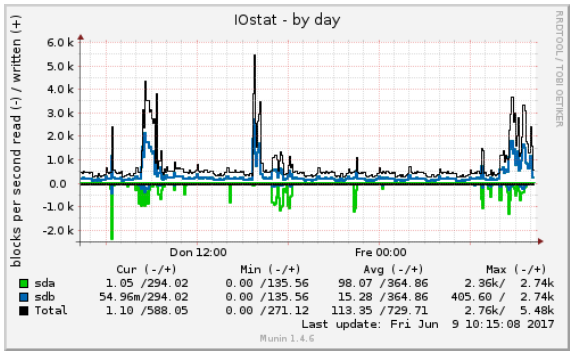

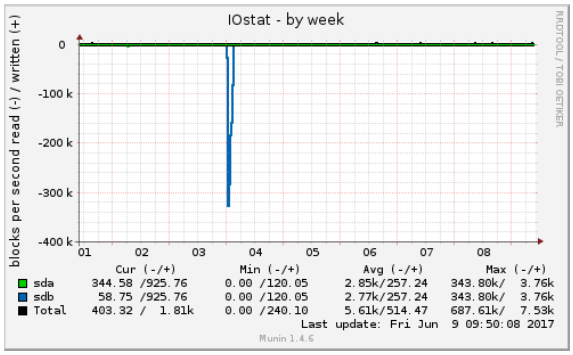

network

:: *altvpn1 traffic*

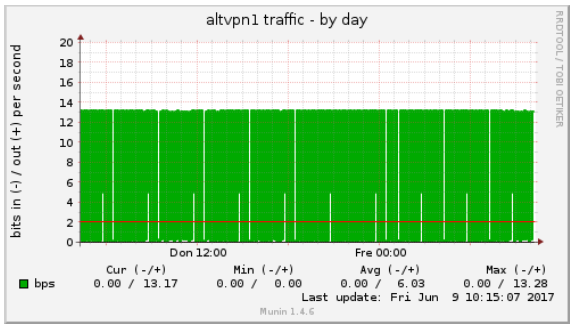

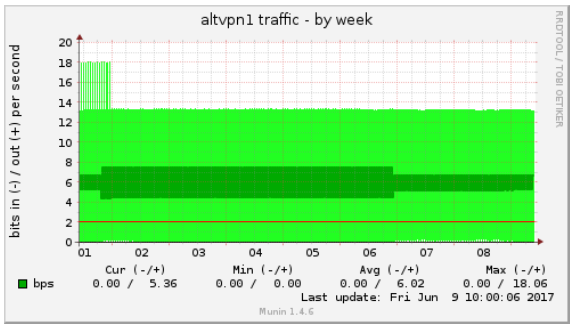

:: *eth0 traffic*

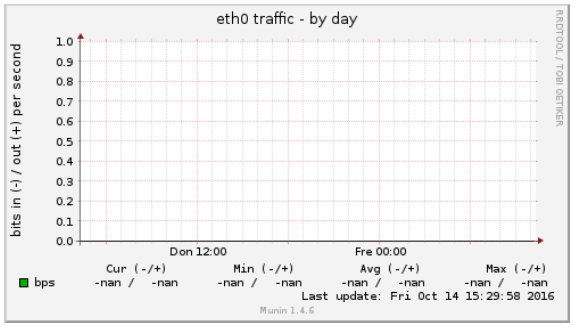

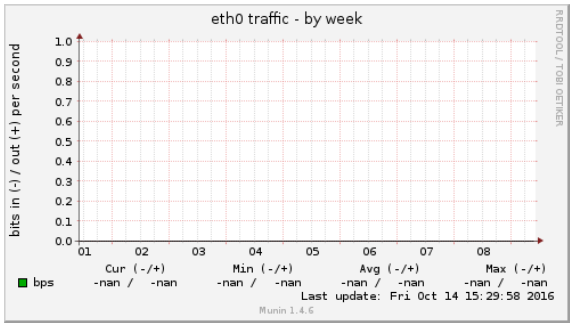

:: *eth1 errors*

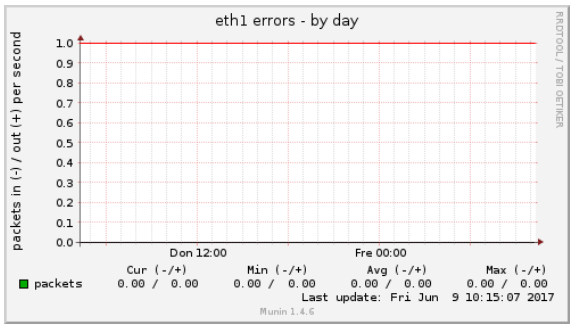

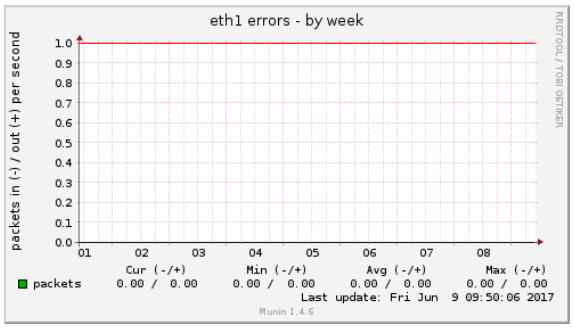

:: *eth1 traffic*

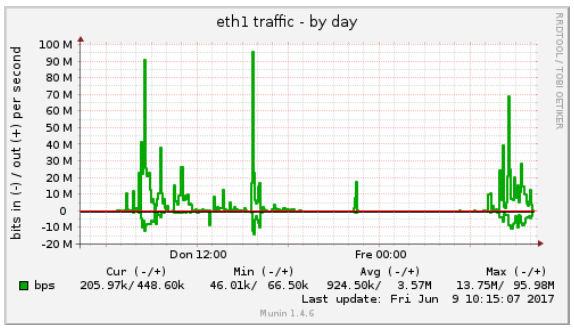

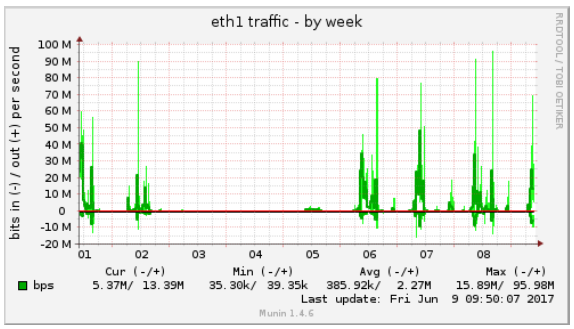

:: *eth2 errors*

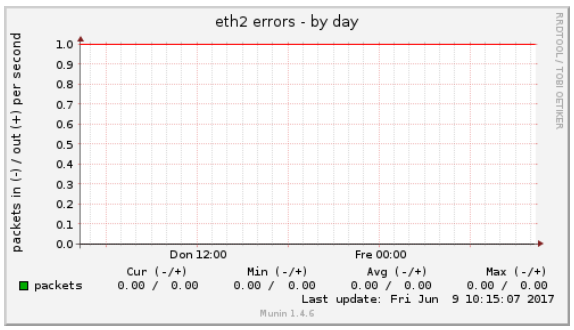

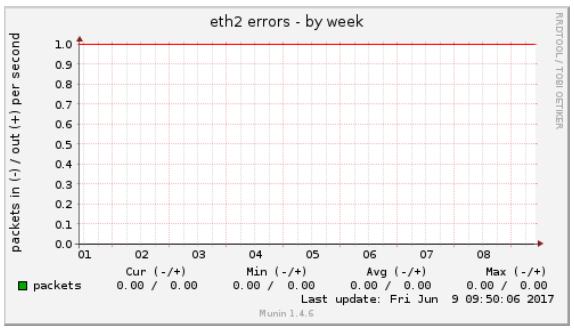

:: *eth2 traffic*

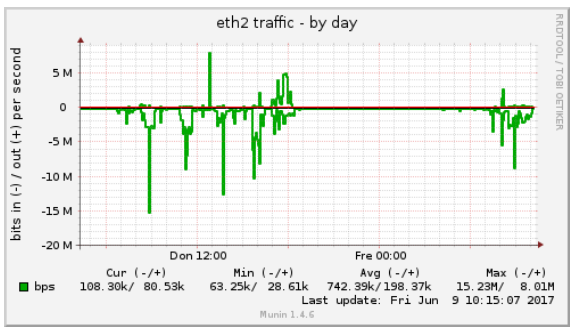

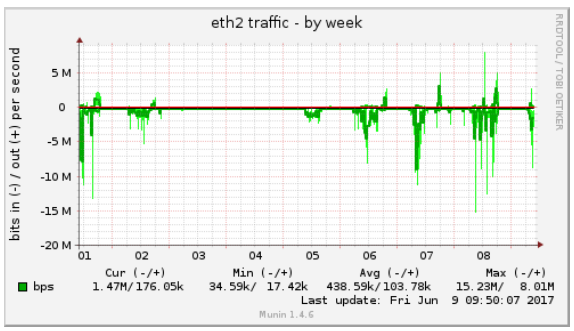

:: *Firewall Throughput*

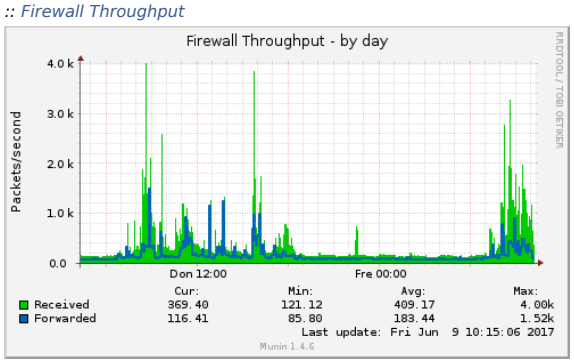

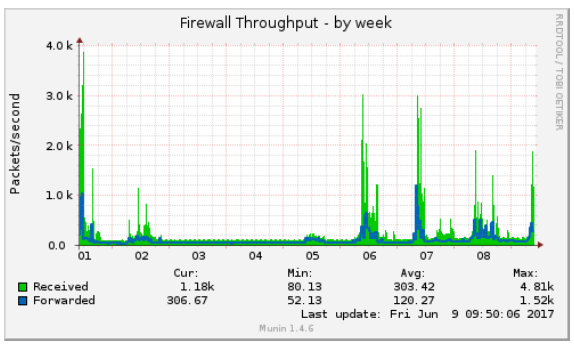

:: *HTTP loadtime of a page*

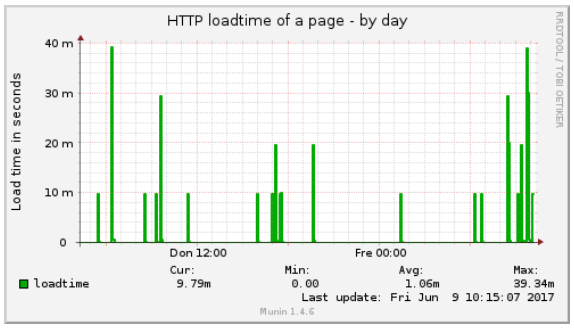

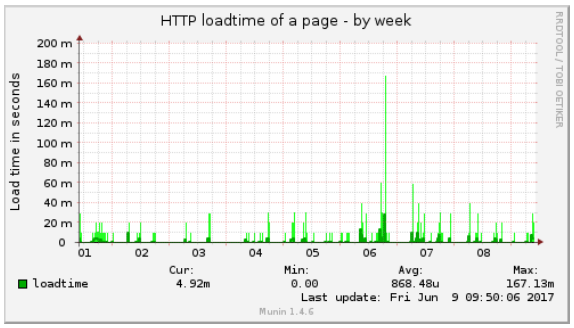

:: *inet0 traffic*

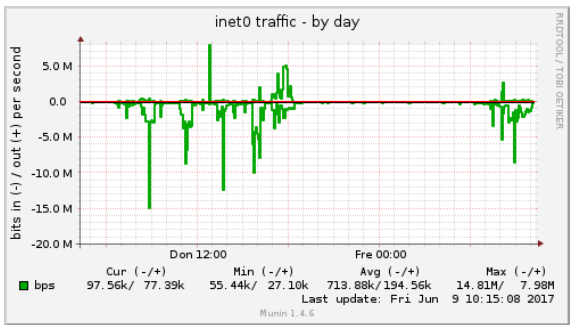

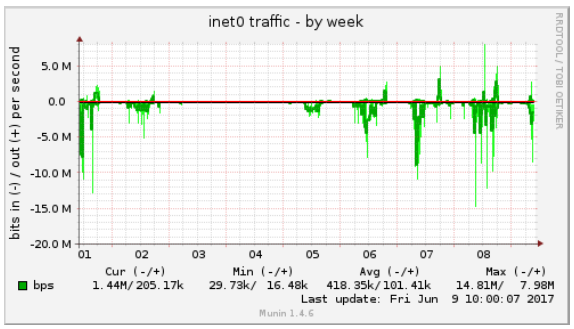

:: *ltsp0 traffic*

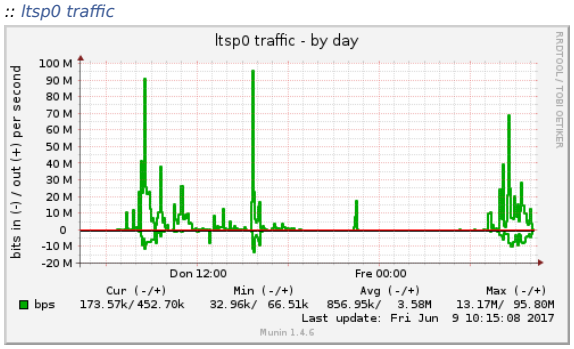

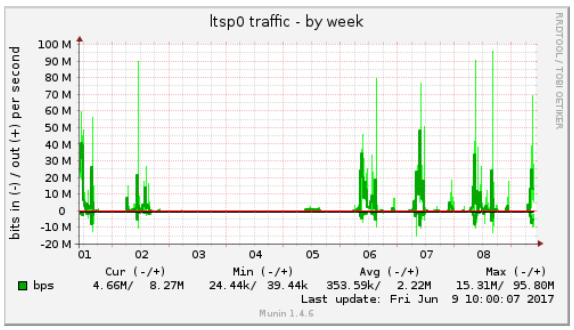

:: *Puavo Bootserver clients*

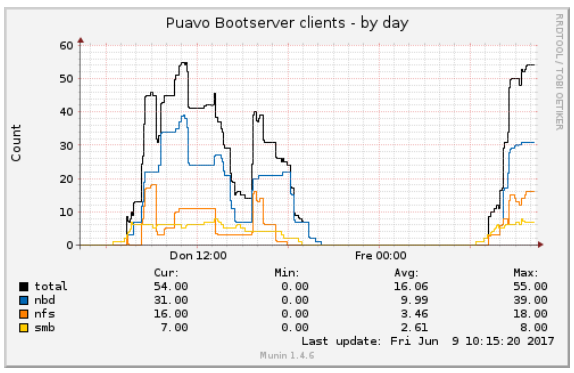

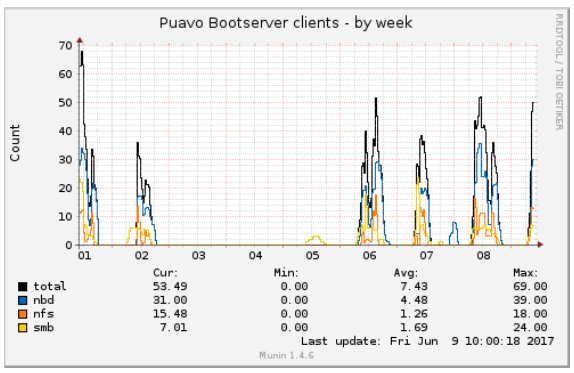

:: *vpn1 traffic*

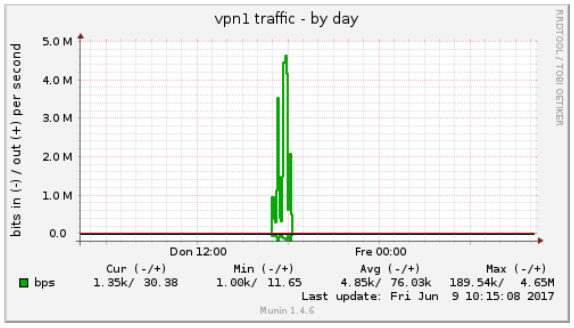

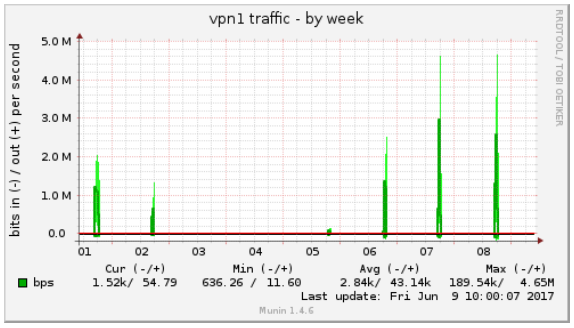

:: *wlan0 errors*

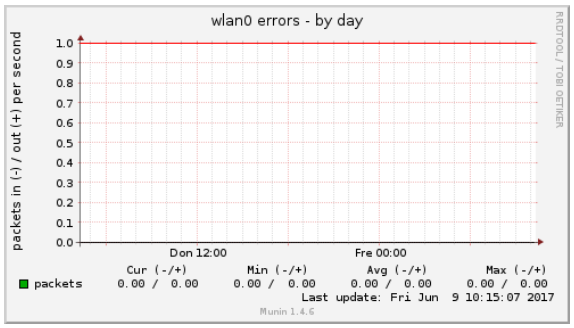

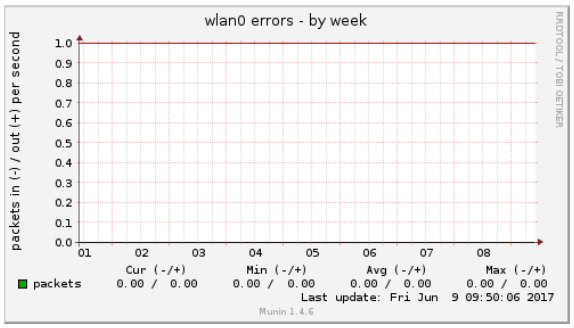

:: *wlan0 traffic*

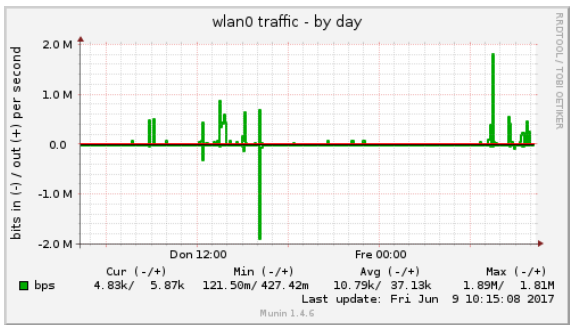

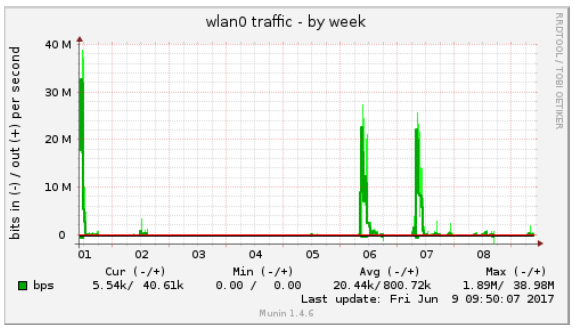

nfs

:: *NFSv4 Server*

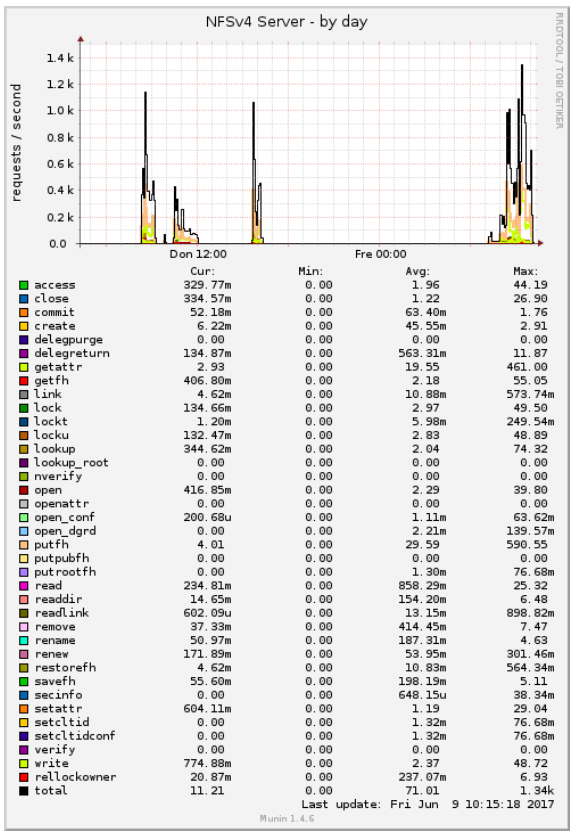

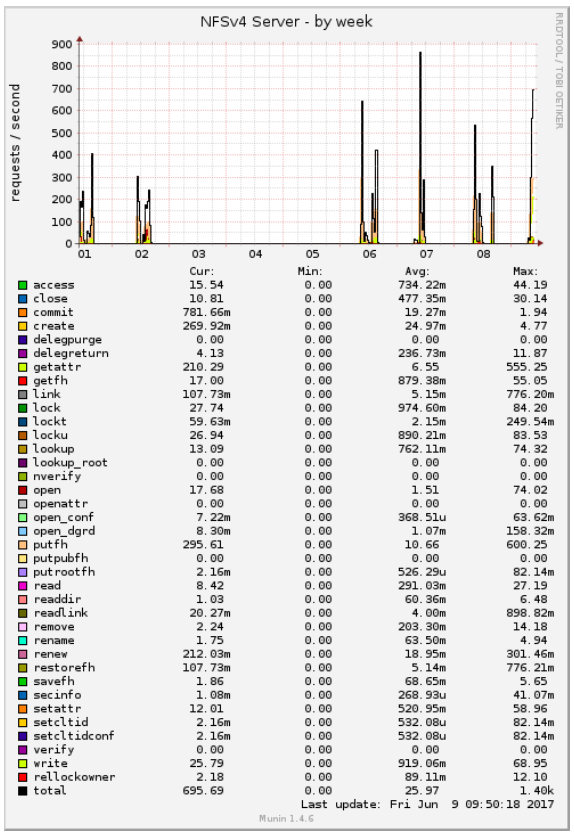

other

:: *Puavo Clients*

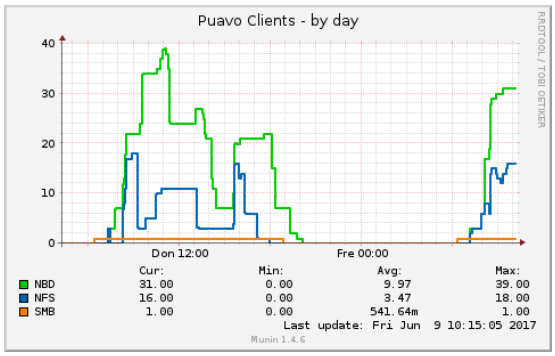

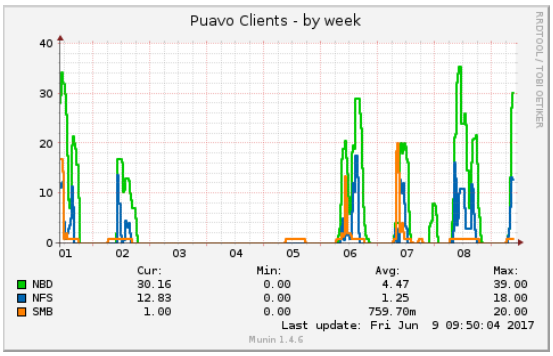

printing

:: *Print queues*

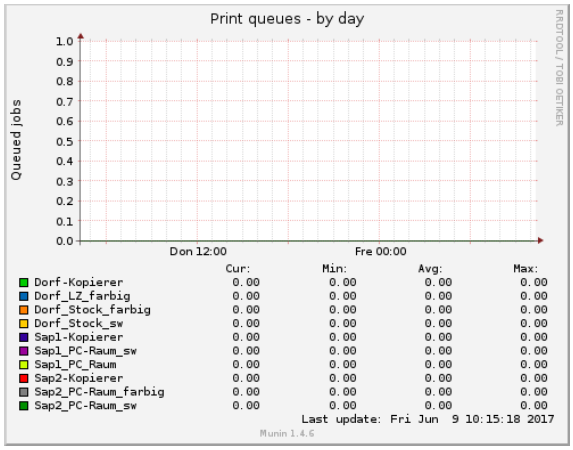

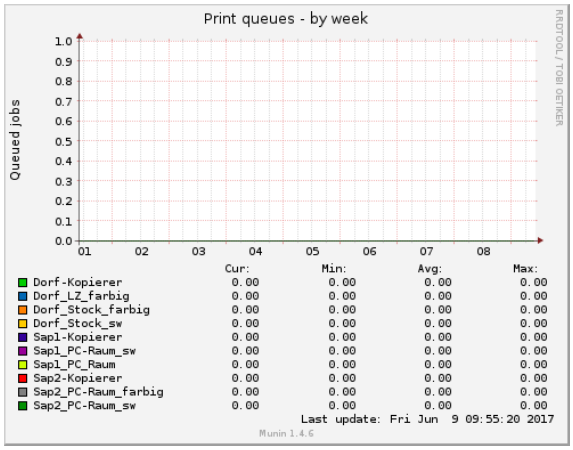

processes

:: *Fork rate*

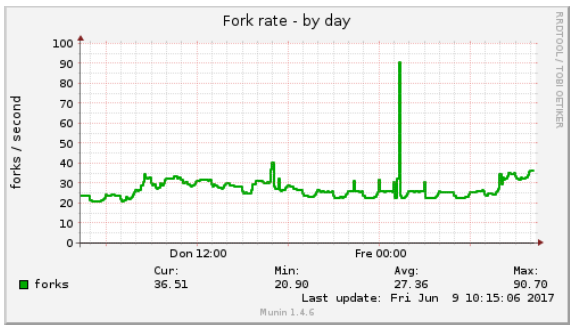

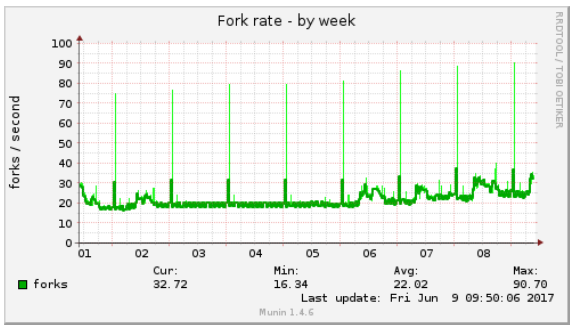

:: *Number of threads*

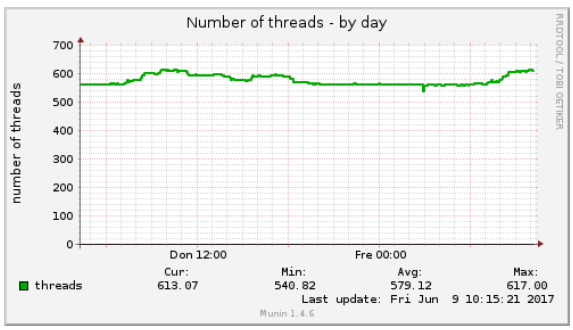

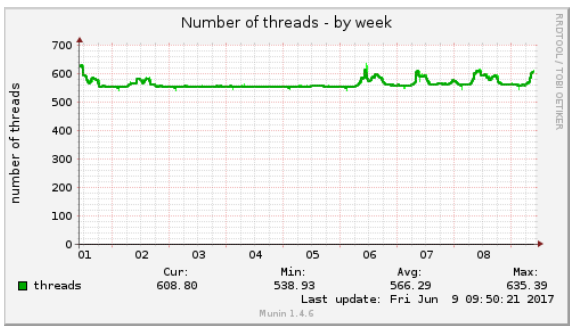

:: *Processes*

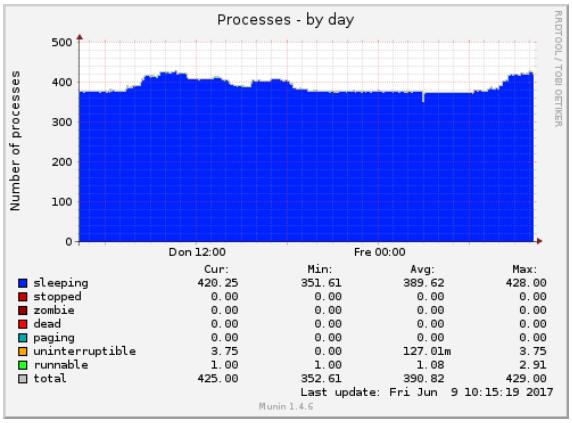

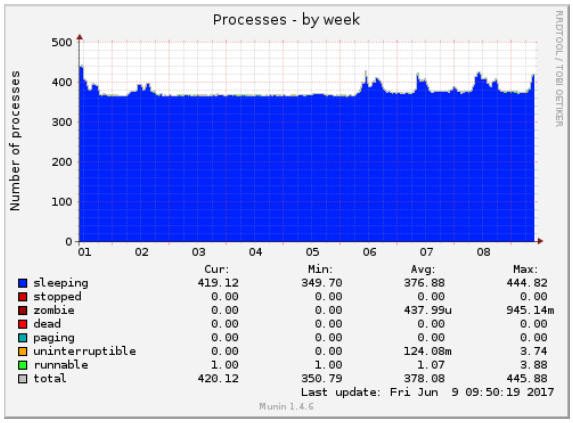

:: *Processes priority*

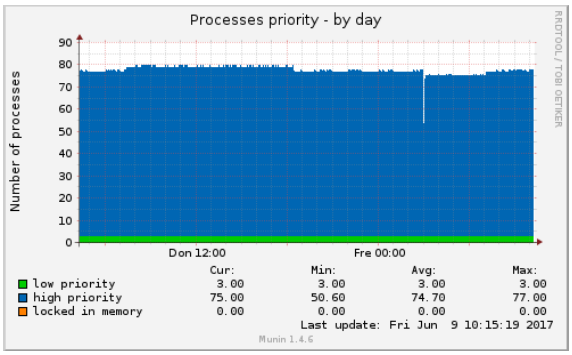

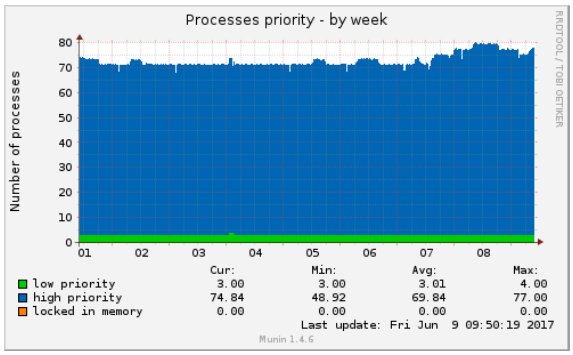

:: *VMstat*

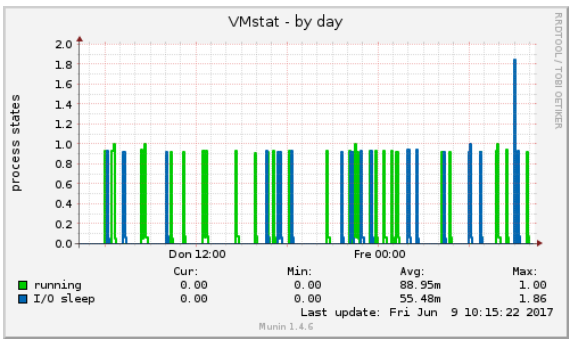

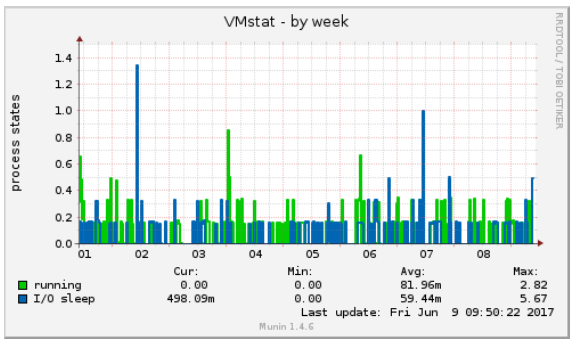

puavo-wlan

:: *Connection age of Puavo WLAN stations*

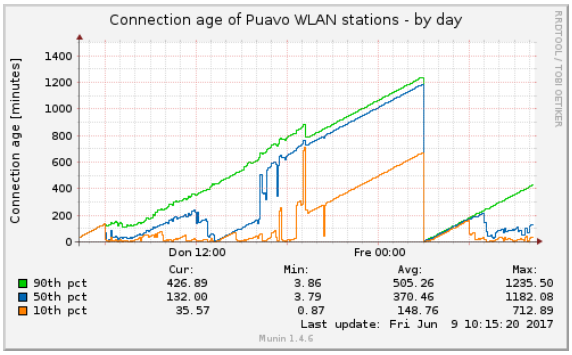

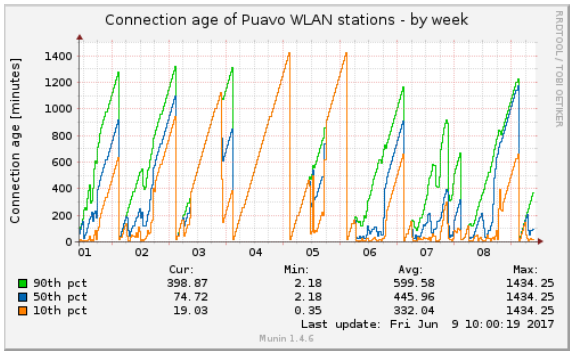

:: *Load average of Puavo WLAN accesspoint hosts*

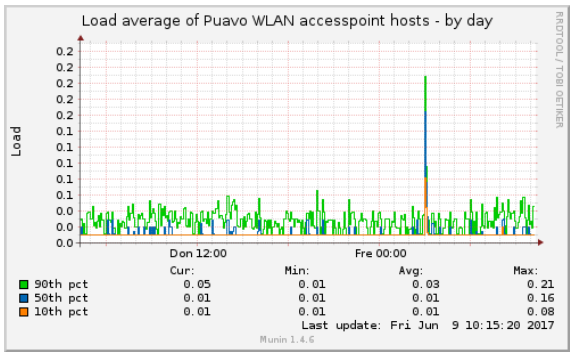

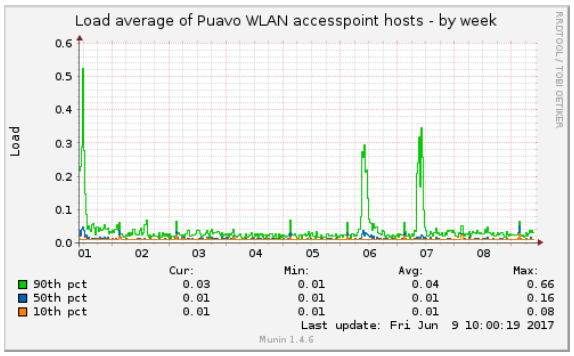

:: *Puavo WLAN elements*

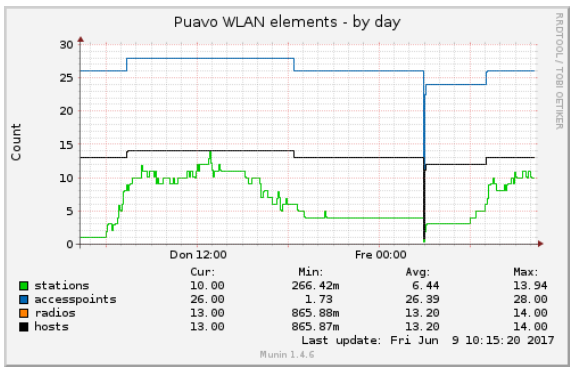

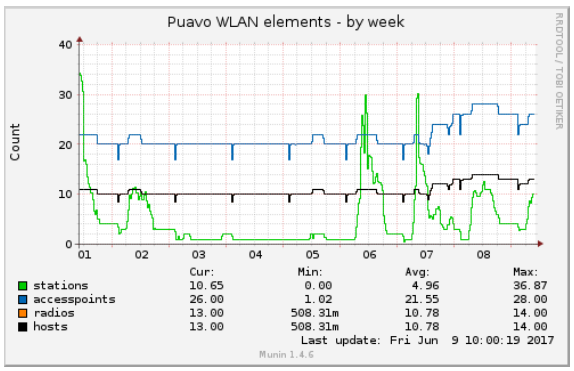

:: *Puavo WLAN traffic*

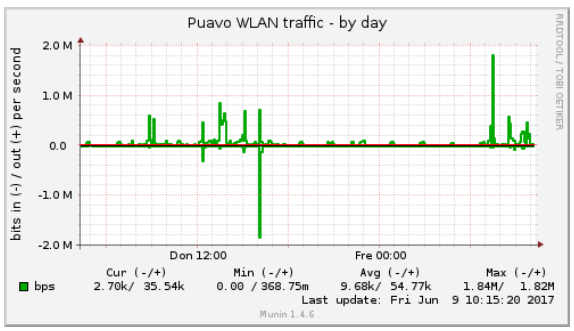

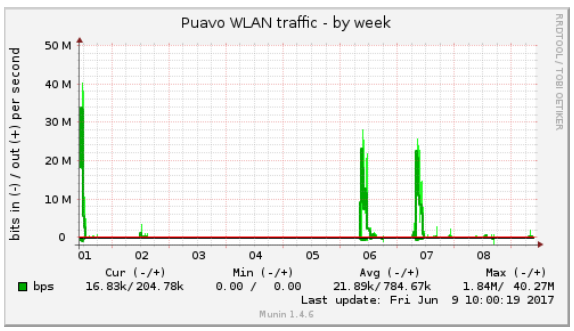

:: *RSSI of Puavo WLAN stations*

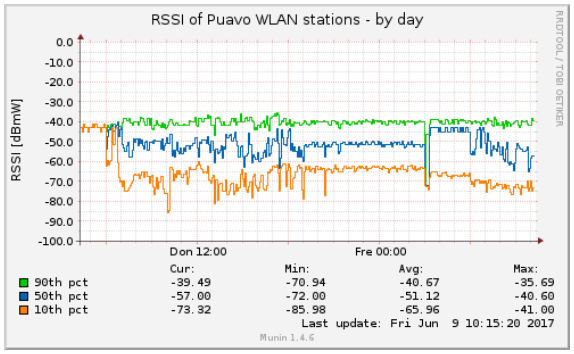

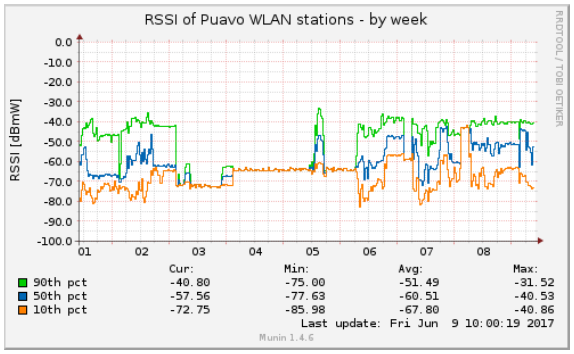

sensors

:: *Fan speeds based on IPMI*

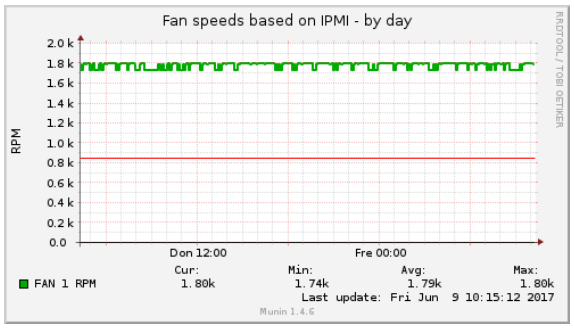

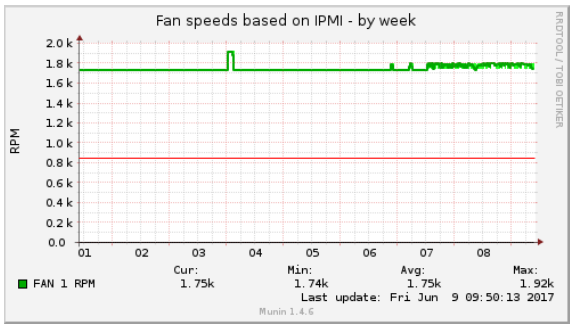

:: *Machine temperature based on IPMI*

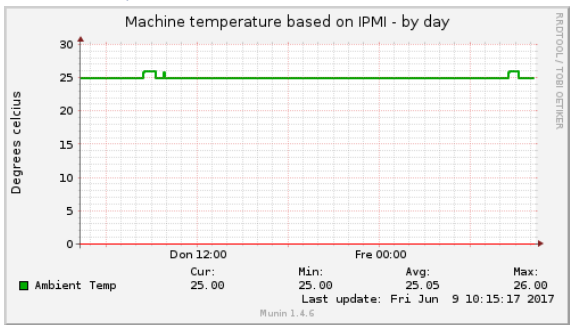

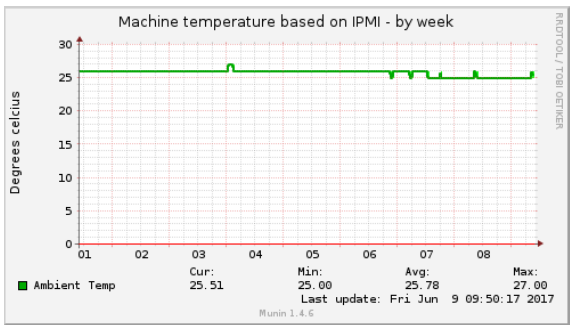

system

:: *Available entropy*

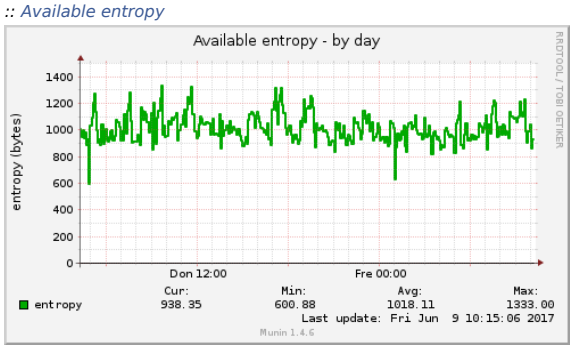

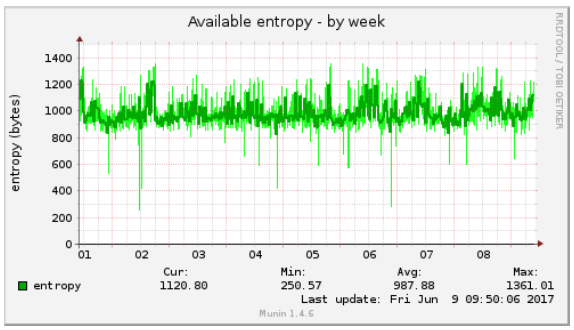

:: *CPU usage*

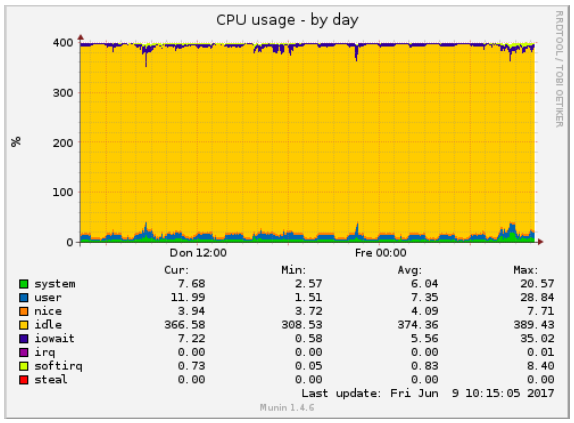

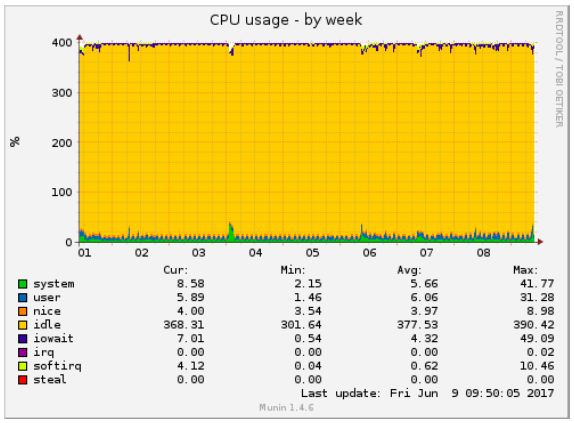

:: *File table usage*

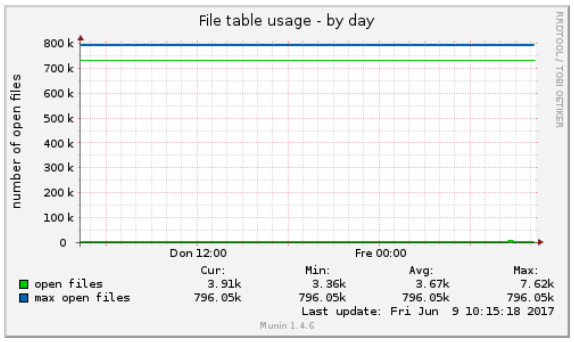

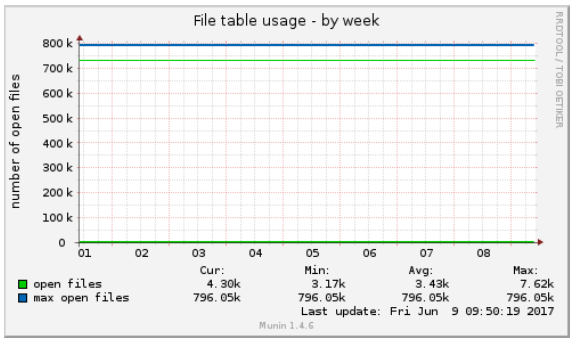

:: *Individual interrupts*

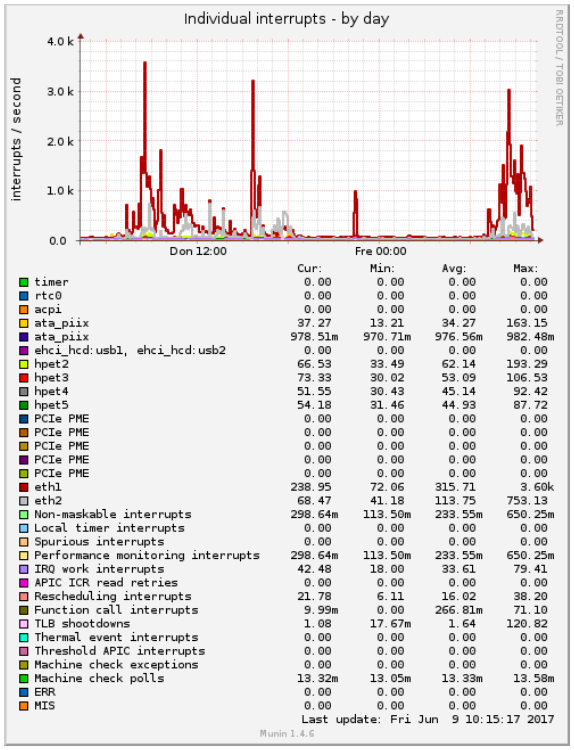

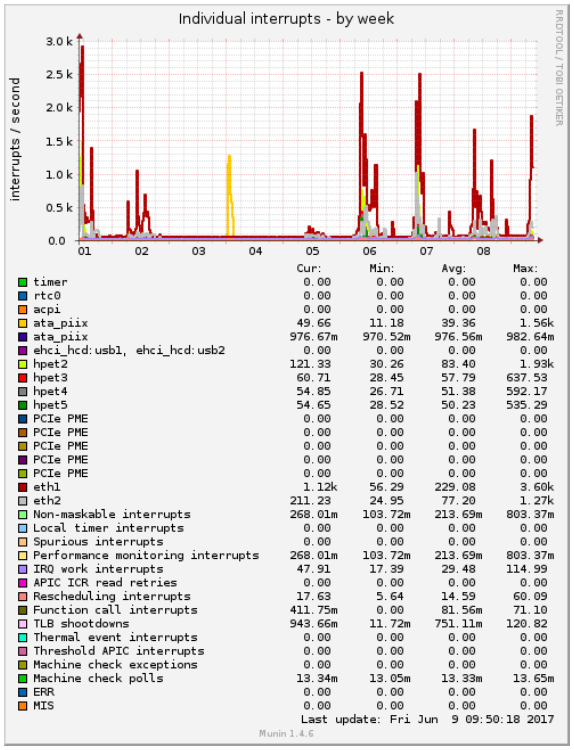

:: *Inode table usage*

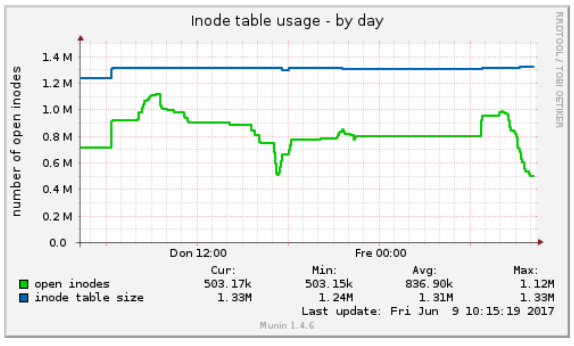

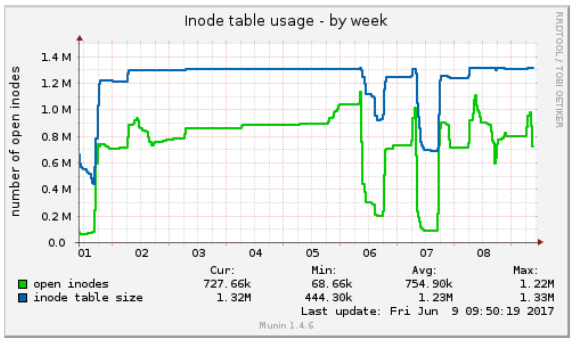

:: *Interrupts and context switches*

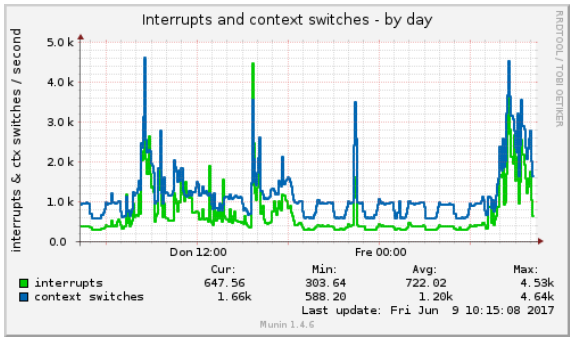

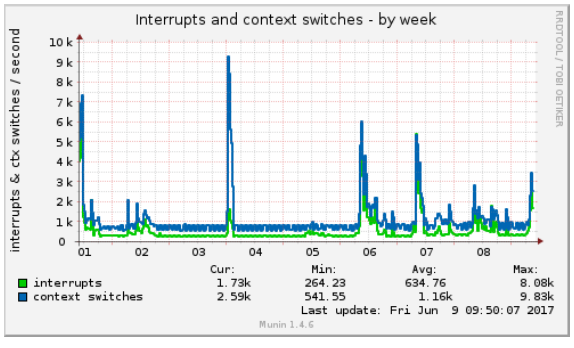

:: *Load average*

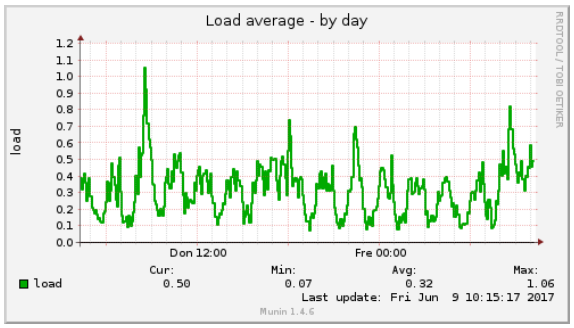

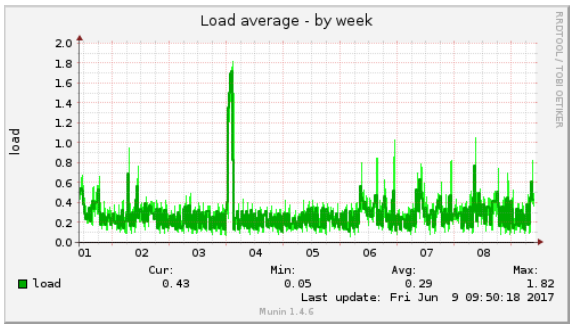

:: *Logged in users*

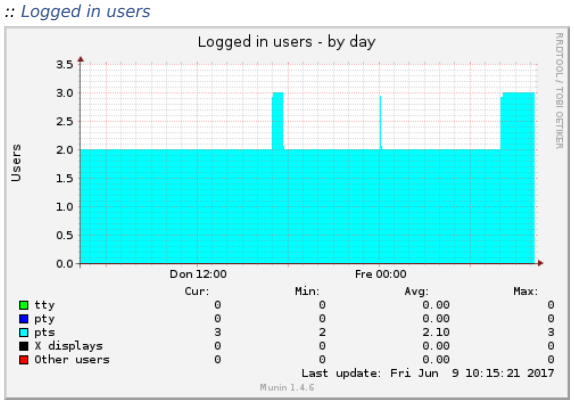

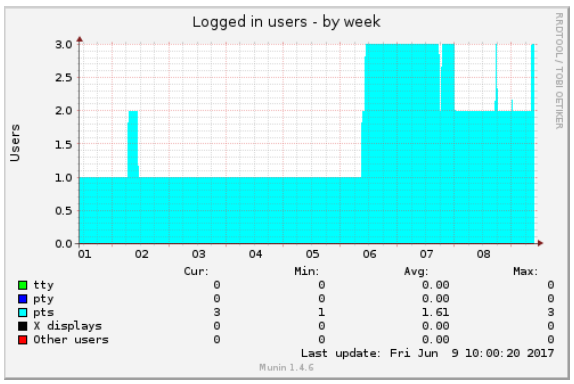

:: *Memory usage*

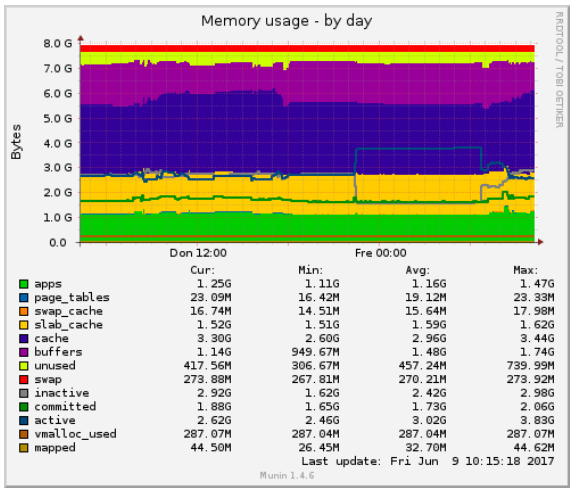

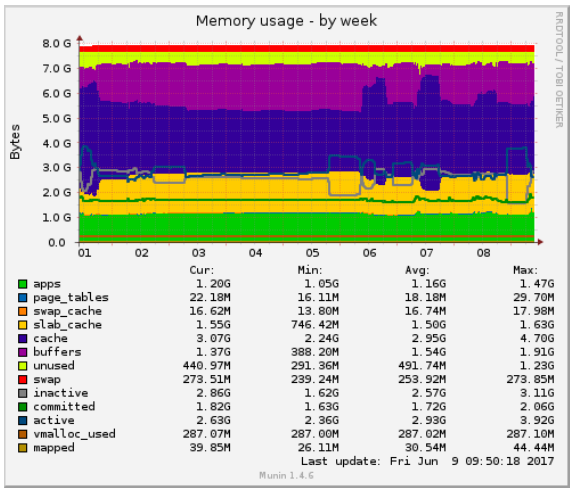

:: *Swap in/out*

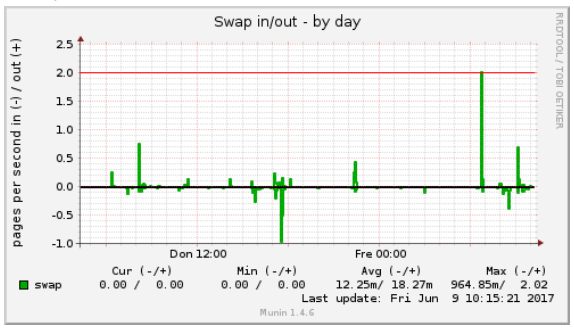

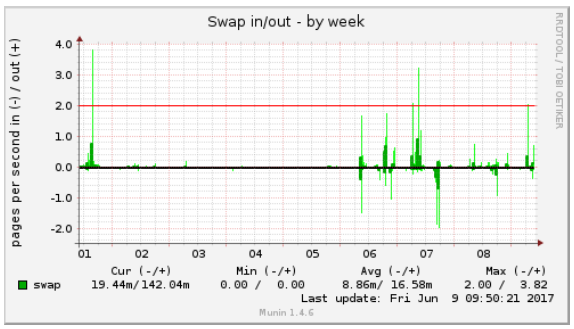

:: *Uptime*

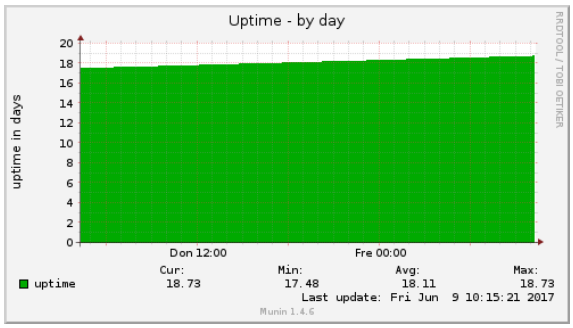

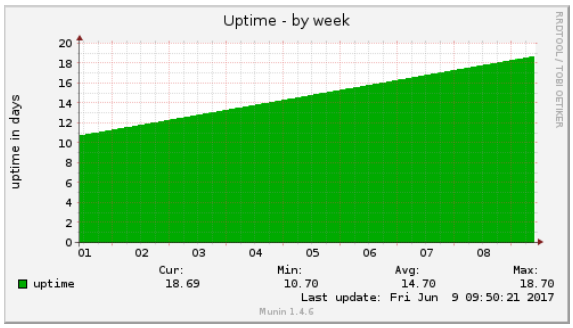

time

:: *NTP kernel PLL estimated error (secs)*

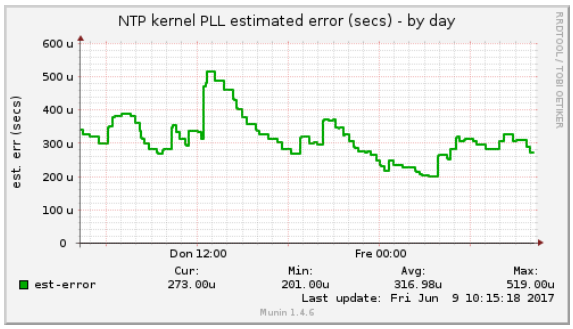

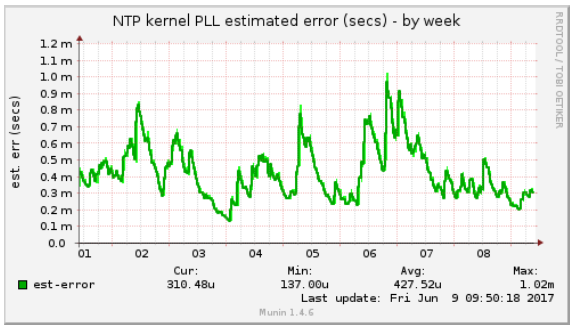

:: *NTP kernel PLL frequency (ppm + 0)*

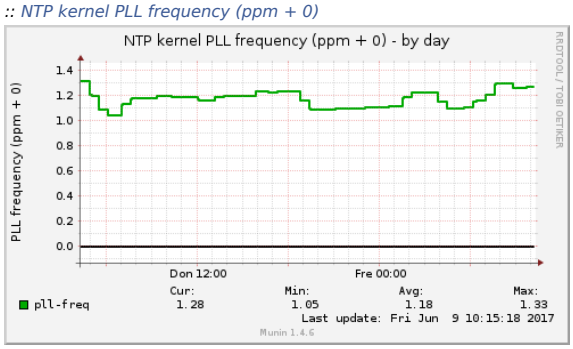

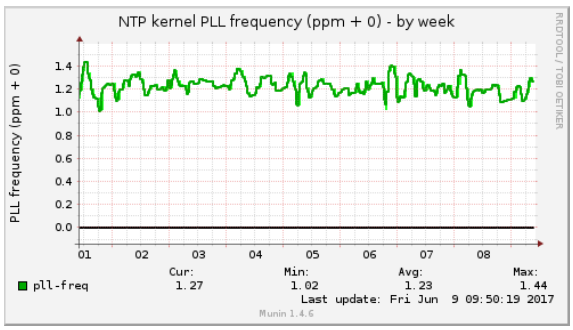

:: *NTP kernel PLL offset (secs)*

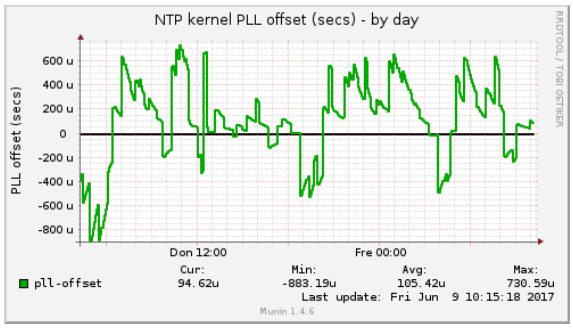

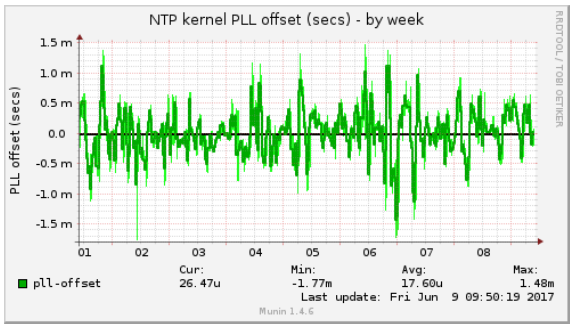

:: *NTP timing statistics for system peer*

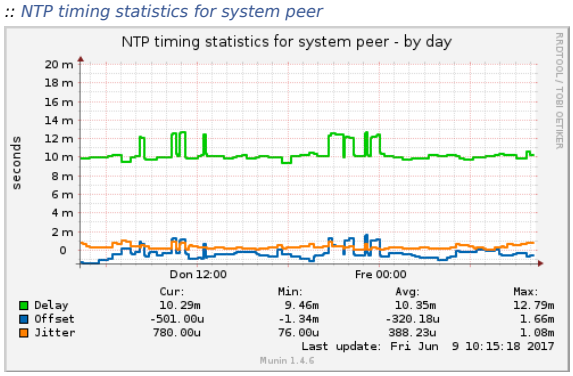

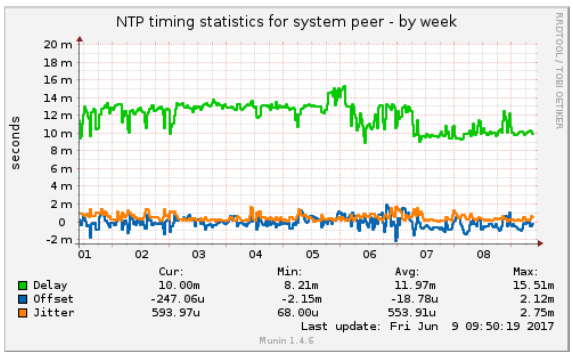

This page was generated by Munin version 1.4.6 at 2017-06-09 10:15:25+0200 (CEST)