



PARTITION TYPE "D"

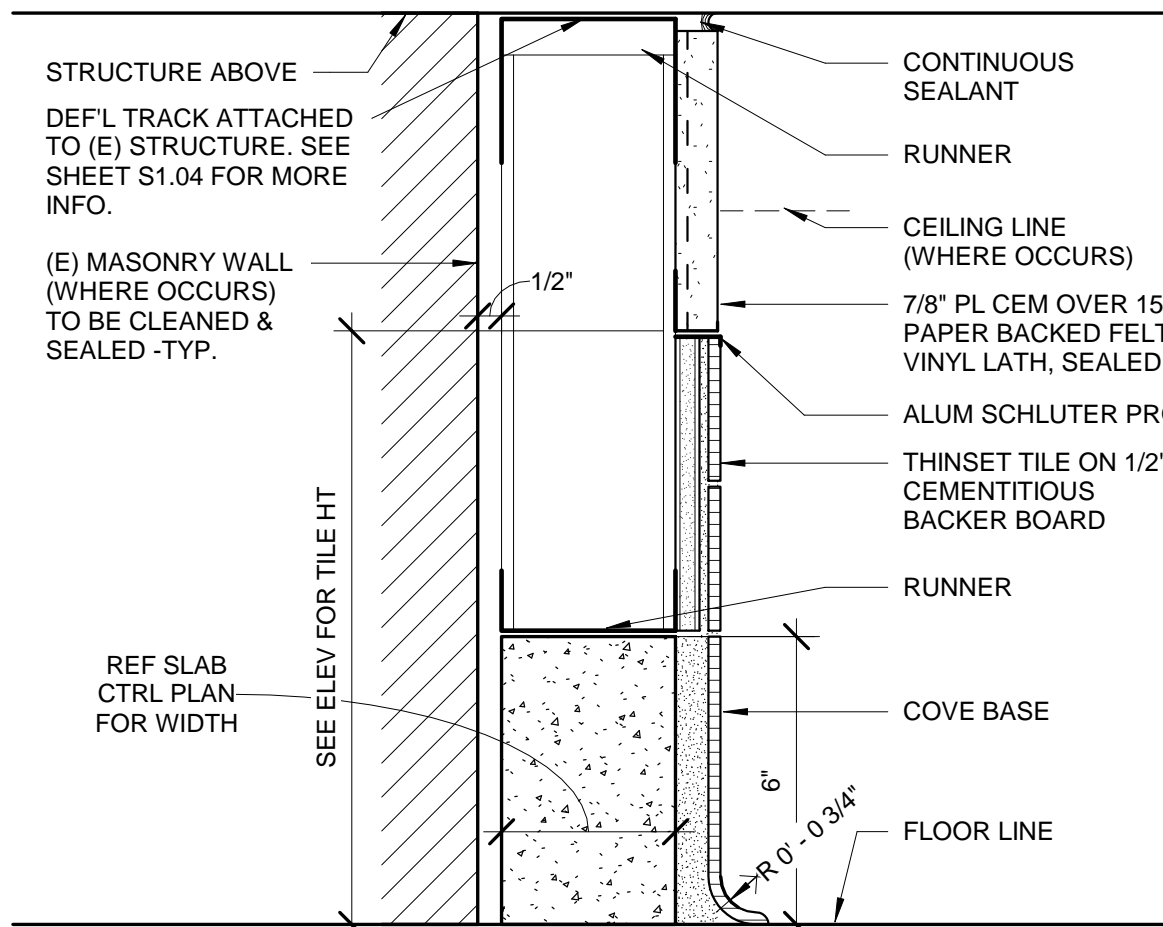


FLOOR PLAN TAG NO SOUND ATTENUATION	FLOOR PLAN TAG WITH SOUND ATTENUATION	STUD SIZE	PARTITION WIDTH	FIRE RATING	UL LISTING
D2	D2	2 1/2"		NON- RATED	N/A
D3	D3	3 5/8"		NON- RATED	N/A
D6	D6	6"		NON- RATED	N/A

PARTITION TYPE "C"

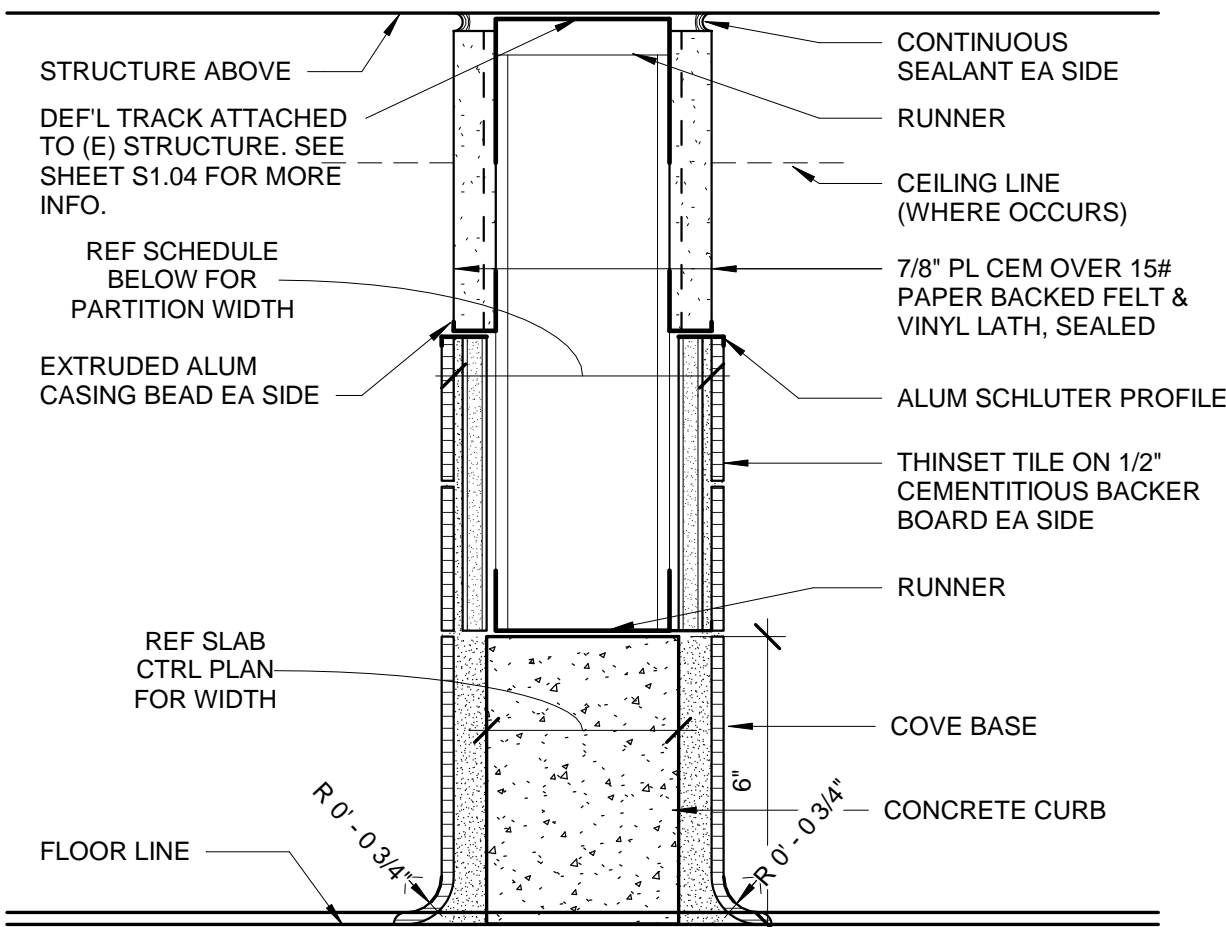


FLOOR PLAN TAG NO SOUND ATTENUATION	FLOOR PLAN TAG WITH SOUND ATTENUATION	STUD SIZE	PARTITION WIDTH	FIRE RATING	UL LISTING
C2	C2	2 1/2"		NON- RATED	N/A
C3	C3	3 5/8"		NON- RATED	N/A
C6	C6	6"		NON- RATED	N/A

PARTITION TYPE "B"

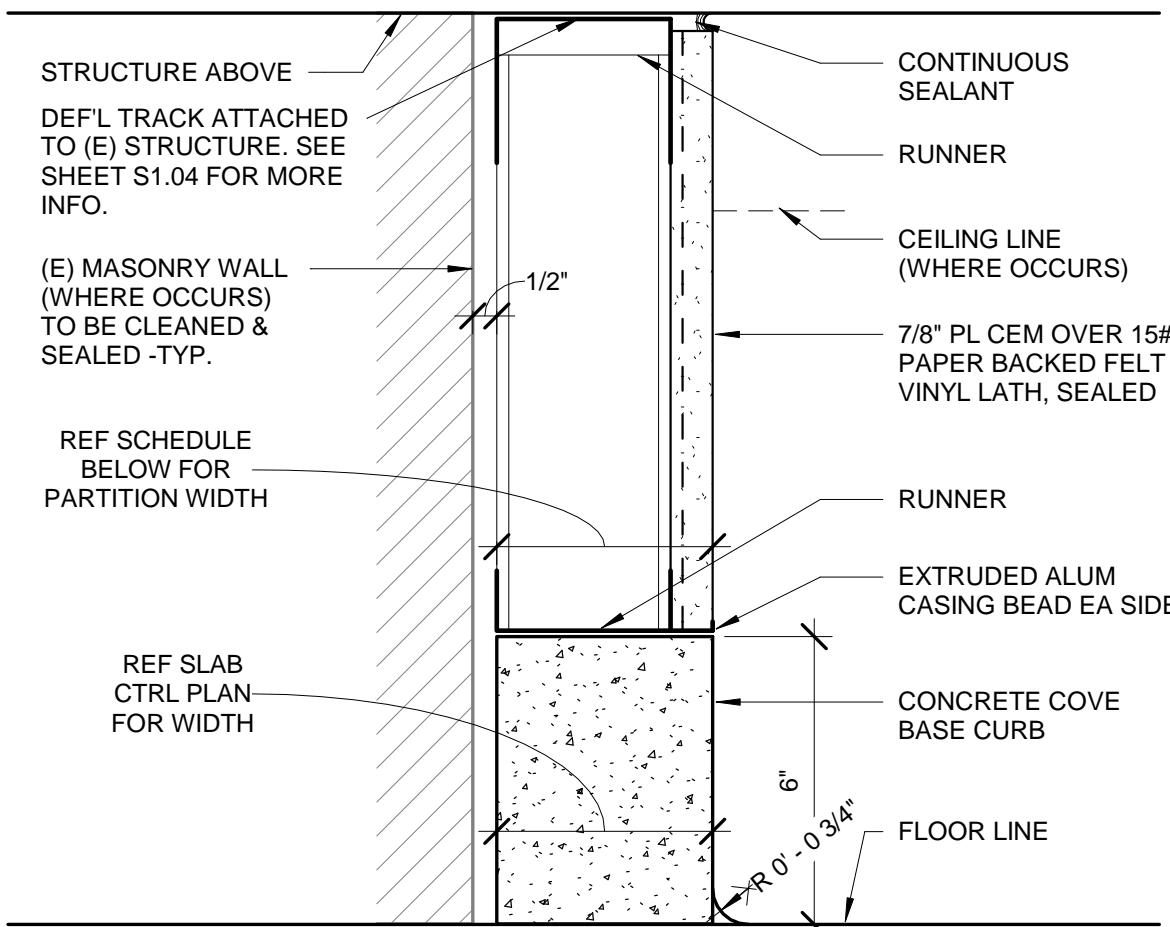


FLOOR PLAN TAG NO SOUND ATTENUATION	FLOOR PLAN TAG WITH SOUND ATTENUATION	STUD SIZE	PARTITION WIDTH	FIRE RATING	UL LISTING
B2	B2	2 1/2"	3 3/8"	NON- RATED	N/A
B3	B3	3 5/8"	4 1/2"	NON- RATED	N/A
B6	B6	6"	6 7/8"	NON- RATED	N/A

PARTITION TYPE "A"

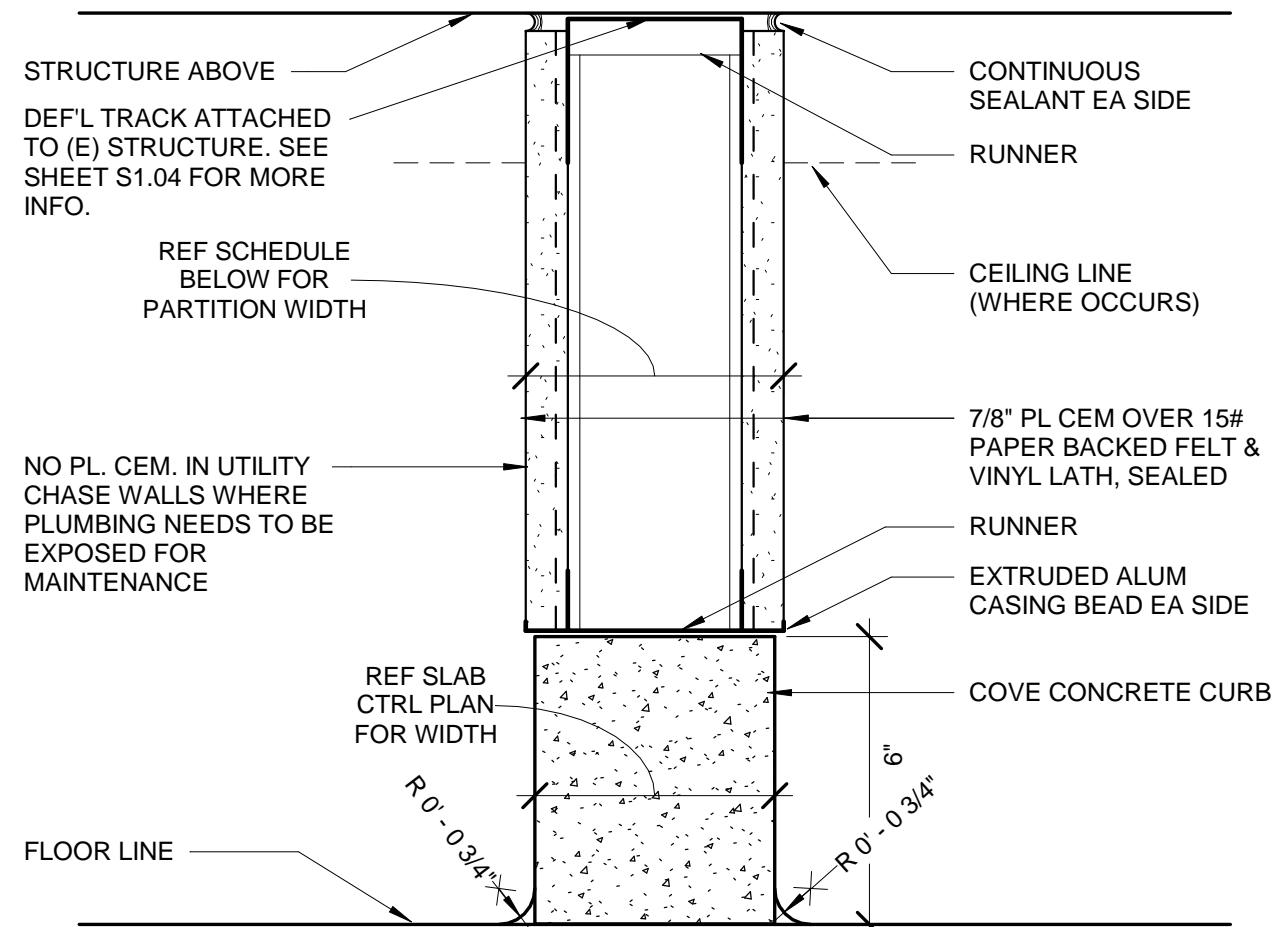


FLOOR PLAN TAG NO SOUND ATTENUATION	FLOOR PLAN TAG WITH SOUND ATTENUATION	STUD SIZE	PARTITION WIDTH	FIRE RATING	UL LISTING
A2	A2	2 1/2"	4 1/4"	NON- RATED	N/A
A3	A3	3 5/8"	5 3/8"	NON- RATED	N/A
A4	A4	4"	5 3/4"	NON- RATED	N/A
A6	A6	6"	7 3/4"		N/A

PARTITION TYPE "G"

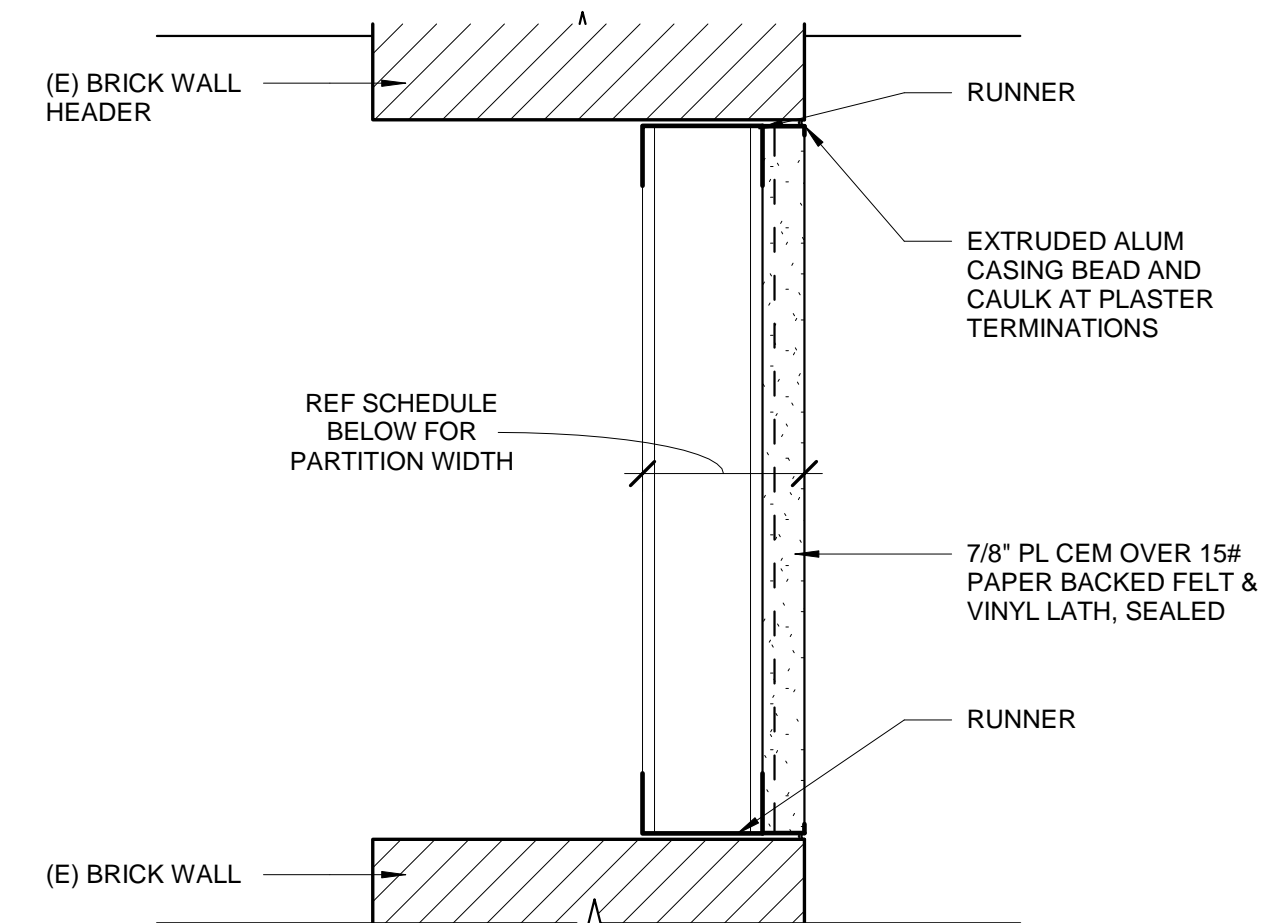


FLOOR PLAN TAG NO SOUND ATTENUATION	FLOOR PLAN TAG WITH SOUND ATTENUATION	STUD SIZE	PARTITION WIDTH	FIRE RATING	UL LISTING
G2	G2	7/8"	1 3/4"	NON- RATED	N/A

PARTITION TYPE "F"

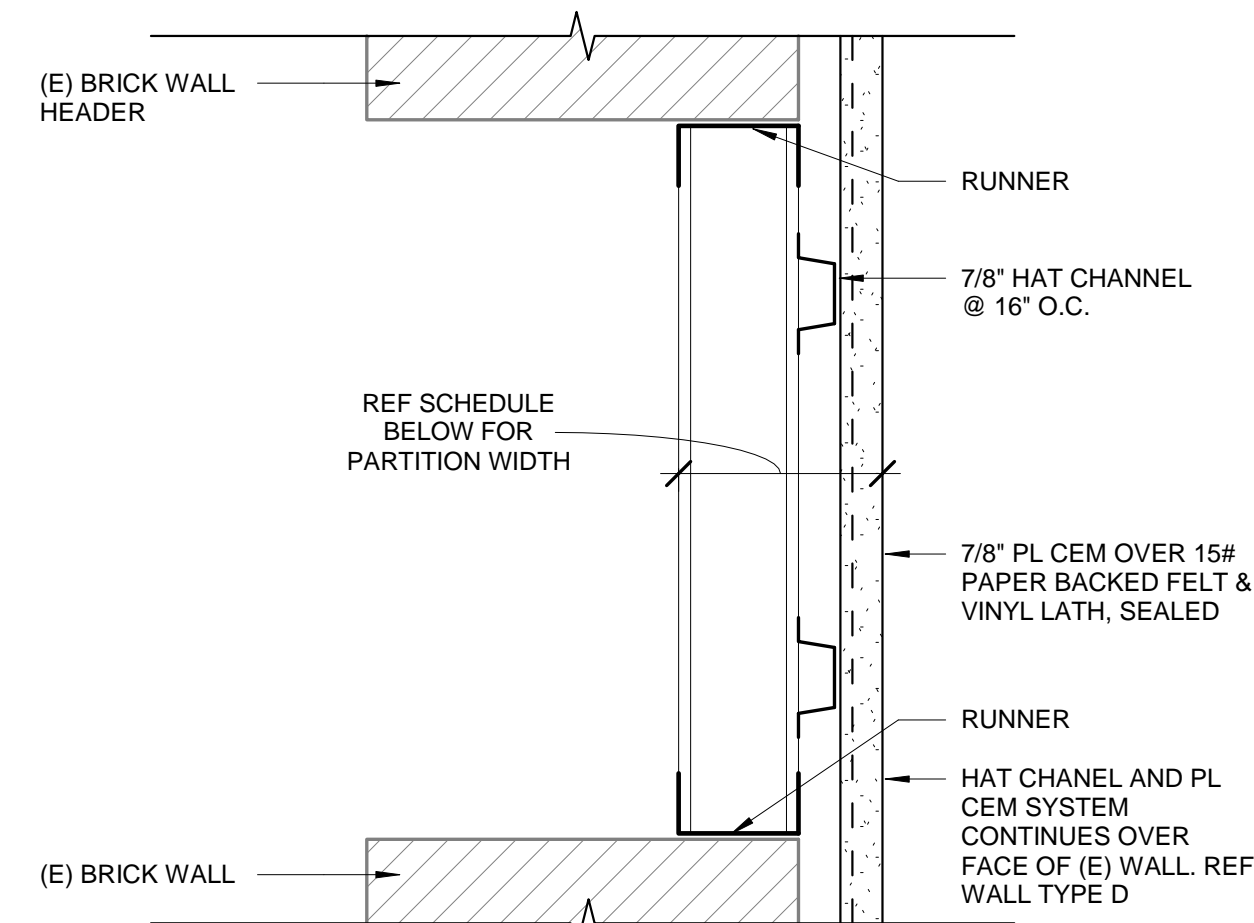


FLOOR PLAN TAG NO SOUND ATTENUATION	FLOOR PLAN TAG WITH SOUND ATTENUATION	STUD SIZE	PARTITION WIDTH	FIRE RATING	UL LISTING
F2	F2	2 1/8"	4 1/4"	NON- RATED	N/A

PARTITION TYPE "E"

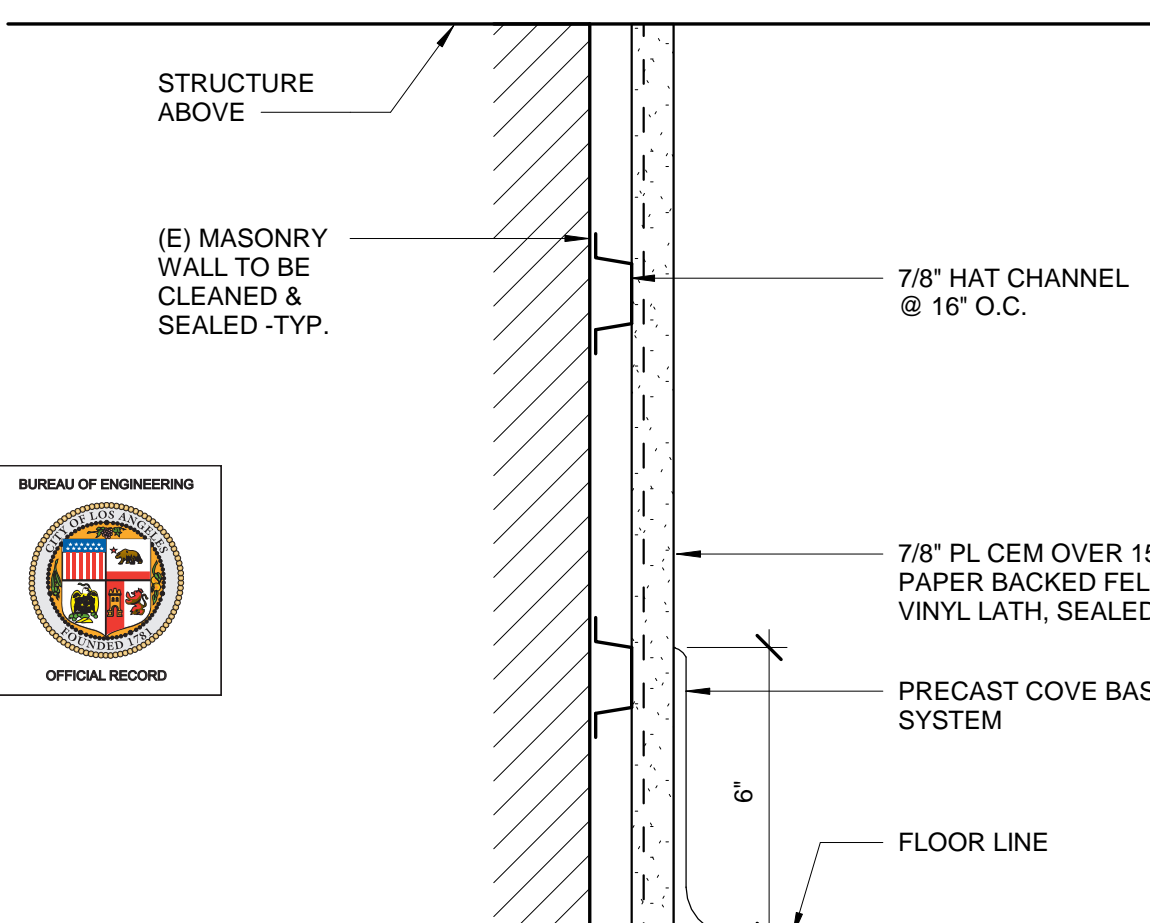


FLOOR PLAN TAG NO SOUND ATTENUATION	FLOOR PLAN TAG WITH SOUND ATTENUATION	STUD SIZE	PARTITION WIDTH	FIRE RATING	UL LISTING
E2	E2	7/8"	1 3/4"	NON- RATED	N/A

PARTITION TYPE "K"

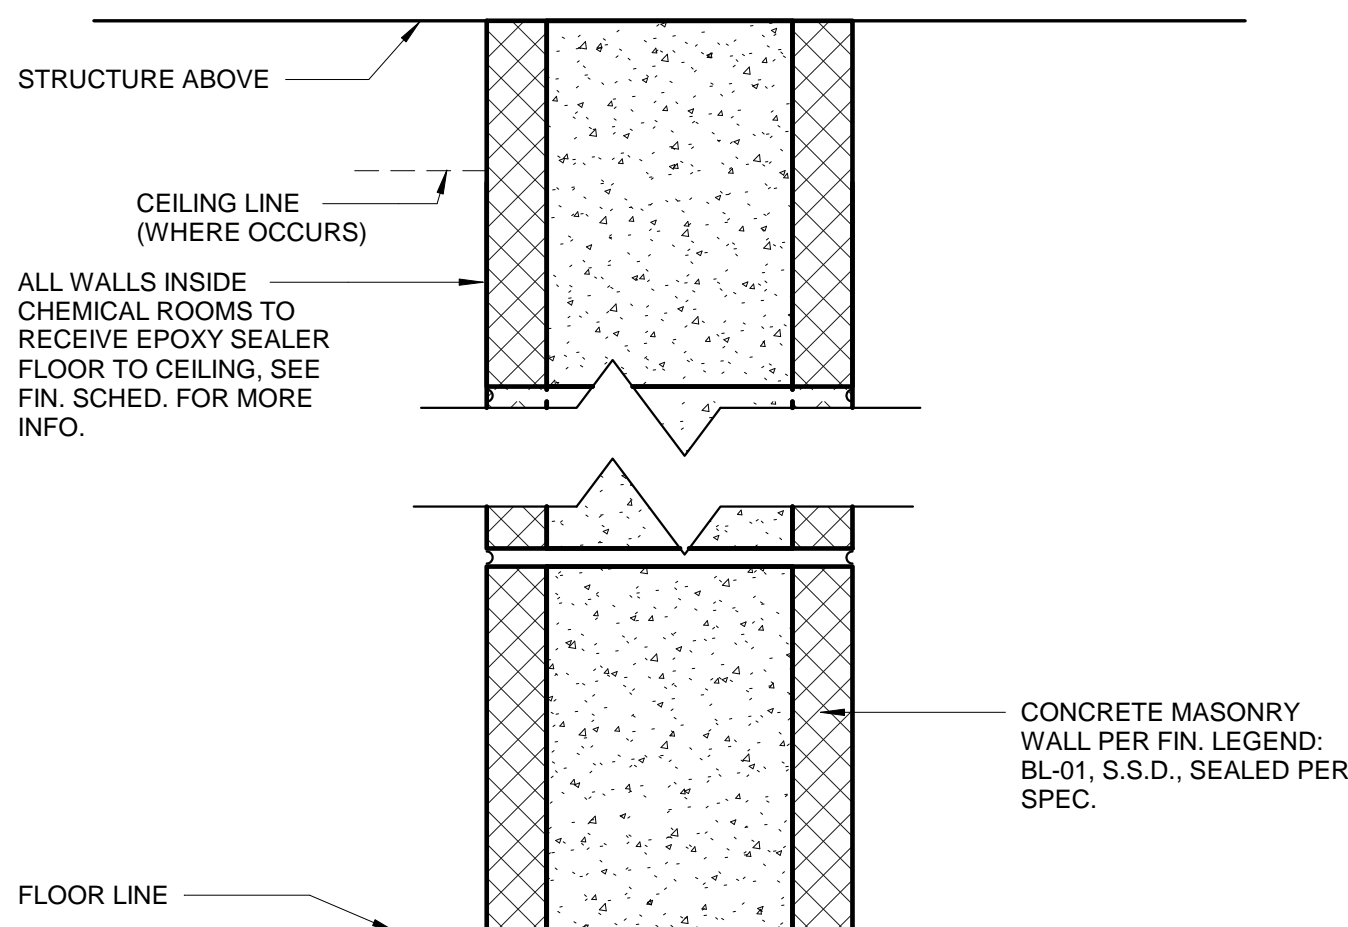


FLOOR PLAN TAG NO SOUND ATTENUATION	FLOOR PLAN TAG WITH SOUND ATTENUATION	STUD SIZE	PARTITION WIDTH	FIRE RATING	UL LISTING
K2	K2	N/A	7 5/8"	NON- RATED	N/A

PARTITION TYPE "J"

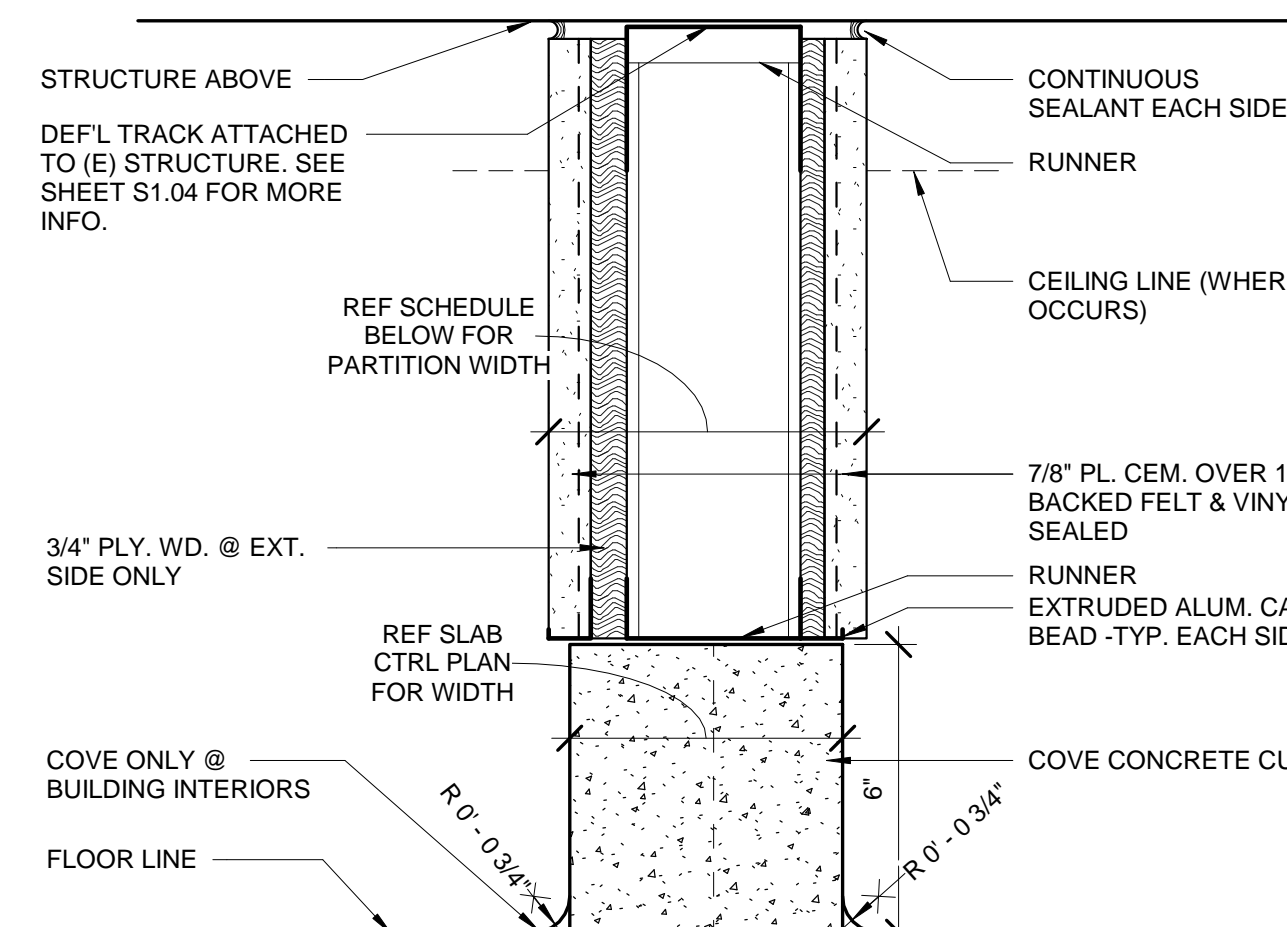

FLOOR PLAN TAG NO SOUND ATTENUATION	FLOOR PLAN TAG WITH SOUND ATTENUATION	STUD SIZE	PARTITION WIDTH	FIRE RATING	UL LISTING
J2	J2	6"	7 5/8"	NON- RATED	N/A

PARTITION TYPE "H"

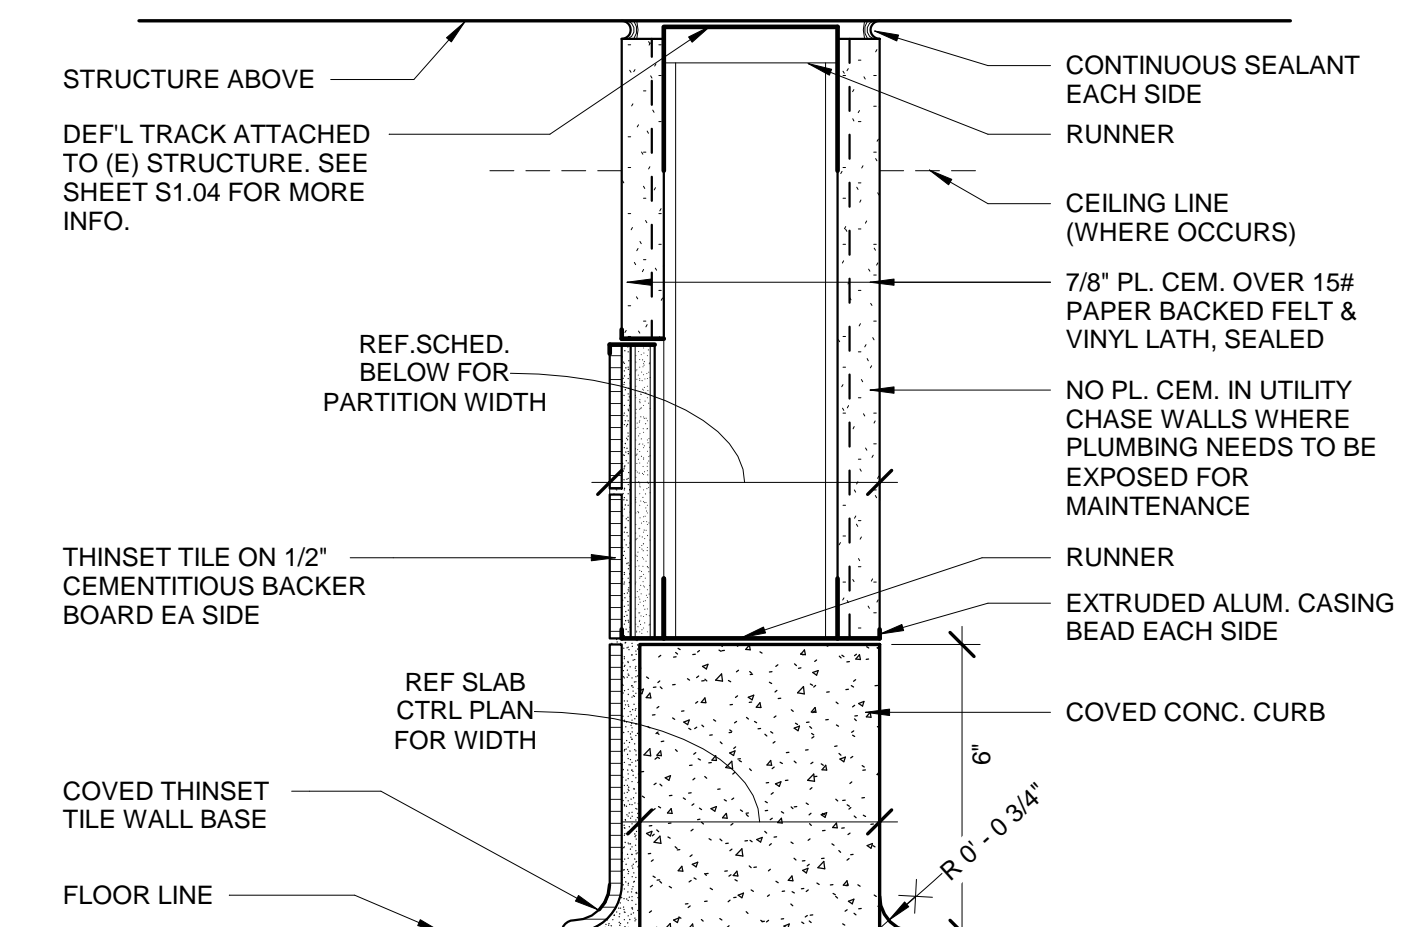

FLOOR PLAN TAG NO SOUND ATTENUATION	FLOOR PLAN TAG WITH SOUND ATTENUATION	STUD SIZE	PARTITION WIDTH	FIRE RATING	UL LISTING
H2	H2	3 5/8"	5 1/2"	NON- RATED	N/A
H3	H3	6"	7 7/8"	NON- RATED	N/A

PARTITION TYPE GENERAL NOTES

- PARTITIONS ARE TAGGED ON FLOOR PLANS. REFER TO FLOOR PLANS FOR PARTITION TYPE IDENTIFICATION.
- PARTITION TYPE TAGS ARE USED TO IDENTIFY CONTIGUOUS PARTITION SEGMENTS. IF A CONTIGUOUS PARTITION SEGMENT IS NOT TAGGED, PARTITION TYPE "A3" SHALL BE ASSUMED.
- THE PARTITION TAG TYPE INDICATES WHETHER SOUND ATTENUATION IS REQUIRED.  

X#

 WALL TAG  
(NO SOUND ATTENUATION)

X#

 WALL TAG  
(WITH SOUND ATTENUATION)
- PARTITION TAGS USE A TWO-PART, ALPHA-NUMERIC DESIGNATION: THE FIRST CHARACTER IS A LETTER INDICATING THE PARTITION TYPE. THE SECOND CHARACTER IS A NUMBER INDICATING THE WIDTH OF THE STUD OR CMU BLOCK.
- SEALANT:
  - USE OF SEALANT FOR FIRE RESISTANCE RATED PARTITIONS SHALL COMPLY WITH REQUIREMENTS OF THE FIRE STOPPING SYSTEM MANUFACTURER AND SHALL BE UL LISTED OR APPROVED IN THE PARTITION UL LISTING.
  - NON-RATED PARTITIONS SHALL USE ACOUSTICAL SEALANT.
- INSULATION AS REQUIRED BY UL LISTING OR PARTITION TAG:
  - USE OF INSULATION FOR FIRE RESISTANCE RATED PARTITIONS SHALL COMPLY WITH THE PARTITION UL LISTING. INSULATION TYPE SHALL BE MINERAL WOOL.
  - INSULATION TYPE FOR NON-RATED PARTITIONS SHALL BE SOUND ATTENUATION BLANKETS.
  - PROVIDE FULL THICKNESS INSULATION INSIDE ALL STUD BOX BEAMS AND HEADERS WITHIN PARTITIONS REQUIRING SOUND ATTENUATION.
- REFER TO METAL STUD MANUFACTURER'S DATA FOR MINIMUM STUD THICKNESS, MAXIMUM SPACING AND ALLOWABLE LIMITING HEIGHTS DEFLECTION CRITERIA FOR GYPSUM BOARD ASSEMBLIES. CONFIRM SEISMIC REQUIREMENTS WITH MANUFACTURER.
- IF METAL STUD MANUFACTURER DOES NOT PROVIDE LOAD TABLES FOR APPLICATIONS SHOWN IN THESE DOCUMENTS, THE APPLICATION SHALL BE DESIGNED BY DELEGATED ENGINEERS AND SUBMITTED FOR REVIEW.
- CONSULT WITH OWNER ON REQUIREMENTS FOR LABELING FIRE AND SMOKE RESISTANT RATED PARTITIONS.
- REFERENCE STRUCTURAL DRAWINGS FOR ADDITIONAL INFORMATION FOR CMU PARTITIONS.
- GRAPHIC DESIGNATION FOR FIRE RESISTANCE RATED PARTITIONS  

=====

 1 HR FIRE BARRIER/SHAFT WALL

=====

 1 HR FIRE BARRIER

=====

 2 HR FIRE BARRIER/SHAFT WALL

=====

 2 HR FIRE BARRIER

=====

 3 HR FIRE BARRIER
- CEMENT, FIBER-CEMENT OR GLASS MAT GYPSUM BACKERS IN COMPLIANCE WITH ASTM C1178, C1288 OR C1325 SHALL BE USED AS A BASE FOR WALL TILE IN TUB AND SHOWER AREAS AND WALL AND CEILING PANELS IN SHOWER AREAS. WATER-RESISTANCE GYPSUM BACKING BOARD SHALL BE USED AS A BASE FOR TILE IN WATER CLOSET COMPARTMENT WALLS WHEN INSTALLED IN ACCORDANCE WITH GA-216 OR ASTM C840. REGULAR GYPSUM WALLBOARD IS PERMITTED UNDER TILE OR WALL PANELS IN OTHER WALL AND CEILING AREAS WHEN INSTALLED IN ACCORDANCE WITH GA-216 OR ASTM C840. WATER RESISTANCE GYPSUM BOARD SHALL NOT BE USED IN THE FOLLOWING LOCATIONS: SECTION 2506.1:
  - OVER A VAPOR RETARDER
  - IN AREAS SUBJECT TO CONTINUOUS HIGH HUMIDITY, SUCH AS SAUNAS, STEAM ROOMS OR GANG SHOWER ROOMS.
  - ON CEILINGS WHERE FRAME SPACING IS 12" O.C. FOR 1/2" THICK AND MORE THAN 16" O.C. FOR 5/8" THICK.

ENGINEERING  
CITY OF LOS ANGELES

NO.

REVISION DESCRIPTION

DATE

BY

INDEX NO.

BUILDING NO.

DEPARTMENT OF PUBLIC WORKS

CITY ENGINEER

DATE:

03/03/20

ARCHITECTURAL DIVISION

ARCHITECT/ENGINEER: JOHN SPARANO

LIC. NO.: C-8244

DESIGNED BY: SPARANO + MOONEY ARCHITECTURE

DRAWN BY: PHILIP DIMICK

CHECKED BY: LUDWIG JUAREZ

APPROVED BY:

CITY OF LOS ANGELES

VERTICAL CONTROL:

HORIZONTAL CONTROL:

SHEET TITLE: WALL TYPES AND DETAILS

PROJECT: GRANADA HILLS POOL AND BATHHOUSE REPLACEMENT PROJECT

ADDRESS: 16730 CHATSWORTH STREET  
GRANADA HILLS, CA 91344

WORK ORDER NO.  
#E170517

PLAN FILE NO.  
#308

DRAWING NO.  
A7.00

SHEET OF SHEETS

BID SET

PROJECT ISSUE DATE: 06/22/21

PLOTTED 7/29/2021 4:34:53 PM